


amateur radio

JOURNAL OF THE WIRELESS INSTITUTE OF AUSTRALIA

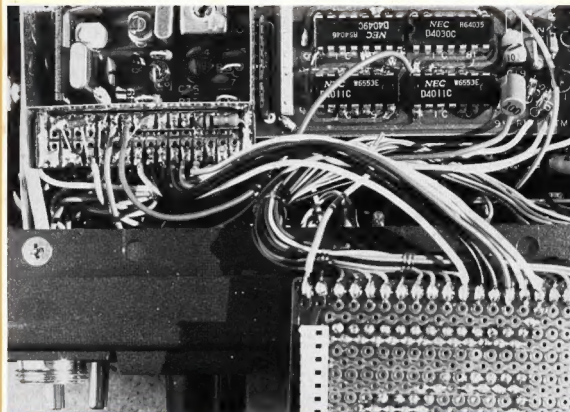

VOL. 46, No. 10

OCTOBER 1978

CONTENTS

TECHNICAL

Auto Simplex for the IC22S	10
Equipment Review: Yaesu FT901DM	
HF Transceiver	22
Getting the best out of your SSB	11
Modifications to VK2BGZ FT101	
Digital Readout	24
Novice Notes	31
Portable Army Wireless Sets of W.W. II	26
Technical Correspondence	36
Timed Muting	17
Try This —	
Simple Gunnplexer 10 GHz Link	12
Voltage Regulator Noise Suppression	13
RTTY Motor Auto-Start	21
144 MHz Linear Amplifier	18

GENERAL

Amateur Radio Reports on Commercial Radio Station	25
August 1978 ACP Examination	51
Return of the 6 Mx Band—Part 1	41
Secretary's Consolation	23
The Ham Operator	24
WIA Correspondence	32
2 Metre Repeaters	41

DEPARTMENTS

ALARA	52
Amateur Satellites	33
Around the Trade	45
Awards Column	53
Contests	46
Divisional Notes	52
Hamads	54

IARU News	53
Intruder Watch	35
Ionospheric Predictions	51
Letters to the Editor	44
Magazine Index	52
QSP	3, 4, 6, 13, 23, 43, 51
Silent Keys	54
VHF-UHF—an expanding world	43
WIANEWS	5

ADVERTISERS' INDEX

54

COVER PHOTO

Interior of the ICOM IC22S showing part of the modifications by VE2YFO — see article "An Auto Simplex for the IC22S" on page 10.

Registered for posting as a Publication — Category "B".

HAM

RADIO SUPPLIERS

323 ELIZABETH STREET, MELBOURNE, VIC., 3000

Phones: 67-7329, 67-4286

Our Disposals Store at 104 HIGGETT ST., RICHMOND (Phone 42-8136) is open Mondays to Fridays, 9.00 a.m. to 5.00 p.m., and on Saturdays to midday.

WALKIE TALKIE

SPECIFICATIONS:

TRANSMITTER — Frequency: In 27 MC citizen band, 27240. Final input power: 100 mW (max.). Communication Mod.: (AM) balanced mod. Oscillator: Crystal controlled. Antenna: Vertical type, telescopic antenna, 37" fully extended.

RECEIVER: Receiving System: Crystal controlled superheterodyne system. Sensitivity: S/N 10 dB or better at 10 uV 5 mW output. Selectivity: Thermistor: D-325. Power Supply: 600p 9V. Dimensions: H — 17.8 cm, W — 8.5 cm, D — 4.4 cm. Weight: 500g. PMG approved.

PRICE \$58.90 PAIR

Postage \$2.40

POWER-SWR METER

This is an in-line and SWR meter for ham radio and CB radio. This power meter indicates the output power of your transmitter and SWR meter reads the ratio of travelling power to your antenna and reflected back from antenna. Compact and inclined front design meet any radio operation desk.

SPECIFICATIONS — Range measured: Power meter 0-10, 100 watts, 2 ranges VSWR 1:1 — 1:3. Freq. response: 3-150 MHz. Impedance: 50 ohms. Dimensions: 75 x 95 x 100 mm. Weight: 600g.

PRICE \$38.90

Postage \$2.40

POWER POINT SAFETY TESTER

Simply plug into power point, switch on and observe lights.

PRICE \$3.70

Postage 80c

AUTOSOT DE-LUXE PLUG-IN TIMESWITCH

APPLICATION: Autosot will control any electrical domestic appliance recommended to be used with a plug of up to 13 amps rating on a 220/250 volts 50 Hz supply.

PRICE \$47.50

Postage \$2.40

COMPAC

50 Watts (rms): 50 Watts Maximum; 4 Ohms; Size: 184W x 111W x 114D m/m; Deluxe Push Speaker Terminals; Weight Approx. 2.27 kg each; Freq. Range 60-21,000 Hz.

PRICE \$105.00 PAIR

Postage \$4.00

ATRIX 360 FTR

100,000 ohms Volt and Transistor Multitester — Fuse protected.

PRICE \$55.00

Postage \$2.60

SPECIAL

8" x 6" SPEAKERS — brand new in cartons — 4 ohm impedance — Ideal for car cassettes, radios, etc.

PRICE \$4.00 EACH — Postage \$1.00

10 FOR \$3.00 — BULK BUY

BULK STORE DISPOSALS

AT 104 HIGGETT STREET

RICHMOND, 3121

Phone (03) 42-8136

We also have a large range of **ELECTRONIC DISPOSALS EQUIPMENT**, including TRANSFORMERS, CABLE, TEST EQUIPMENT, TRANSMITTERS, METERS, etc.

100 FT. ROLL BELL WIRE — 16 Gauge

\$3.00 per Roll

**USA RECORDING TAPE —
POLYESTER**

Size 7" 1800 **\$5.90** — 1200 **\$5.30.**

Size 5" 1200 **\$4.00** — 900 **\$3.00**

**SINGLE CORE OUTSIDE SHIELDED
CABLE 77.0076, 100 yard rolls**

\$15.00 per Roll

**OMRON RELAY MK 3 DC 35 volts, 3
amp rating, 3 pole changeover. To
operate on 220 volts DC or 110 volts DC
Series Resistor 6.63 watts**

\$5.00 each

NEW MAGNAVOX 53TS SPEAKERS

5" x 3" 8ohm. Ideal for small extension
speaker for communications equipment.

\$1.95 each plus P&P

NEW AWA-THORN TV TUNERS

Type ENR5758

\$2 each plus P&P

You are invited to call in and inspect. **NO
PARKING PROBLEMS** A 104 HIGGETT STREET
RICHMOND. Phone 42 8136.

**BASE STATION MICROPHONE WITH
SPEECH COMPRESSION AMPLIFIER
MODEL TW-232**

This model has a rugged die cast, and is specially designed to fill the need of a base station microphone with high modulation level capability. It is for use with all types of communication transmitter, transceivers, business radios and CB; etc.

PRICE \$45.00

Postage \$2.40

HIOKI OL-64D

20,000 Ohms per Volt DC, 8,000 Ohms per Volt AC.

PRICE \$32.90

Postage \$2.00

240 POWER SUPPLY KIT

13.8V DC out. at 3 amps.

PRICE \$18.90

Postage \$2.40

(All you need is a box to put it in.)

6 FEET MIKE LEADS

4 Wires.

PRICE \$1.80

9 x 6 CAR SPEAKER GRILLS

PRICE \$1.20

DYNAMIC MICROPHONE PRIMO UD 644

Prime Deck Type, 800 Ohms.

PRICE \$29.90

Postage \$2.55

HAND HELD MIKE

50K Ohms.

PRICE \$14.90

Postage \$1.80

ELECTRO-MAGNETIC ROCKING ARMATURE INSERTS

2,000 Ohms, Type 192.

PRICE \$9.50

Postage 80c

KR65 METERS

10V, 30V, 30V, 3 1/2 in. x 2 1/2 in. M/Hole 1 1/2 ft. ft. DC.

PRICE \$12.50

Postage \$1.00

KR65

10A, 20A, 30A, DC.

PRICE \$12.50

Postage \$1.00

SOLDER EATER

1-8 Copper Brand, Tinted with Corrosive Resin.

PRICE \$2.20

TRADIPER MODEL TE-15

The Model TE-15 Transistorized Grid Dip Meter is a very accurate instrument operating from a 9 volt battery power supply. Six plug-in coils are supplied with each unit, covering the frequency range of 360 kHz to 240 MHz.

The Model TE-15 can be used for a number of useful purposes. With the most common use as a Grid Dip Meter, can also be employed as a relative field strength meter. It is ruggedly constructed and very light in weight. Because of transistorized circuit employed there is no need for an AC power supply as used in many other models. The Model TE-15 will certainly prove invaluable to radio amateurs.

PRICE \$65.00

Postage \$2.40

MAIL ORDERS WELCOMED. Please allow pack and post on items listed on this page. If further information required send a stamped SAE for immediate reply from the above address. Larger items can be sent F.O.B. Due to circumstances beyond our control, prices quoted in this advertisement are subject to alteration without notice.



amateur radio

Published monthly as its official journal by the Wireless Institute of Australia, founded 1910.

OCTOBER 1978

Vol. 48, No. 10

PRICE: 90 CENTS

(Sent free and post paid to all members)

Registration Office:
2/517 Toorak Road,
Toorak, Victoria, 3142.

EDITOR:

BRUCE BATHOLDS*

VK3JUV

ASSISTANT EDITORS:

RON COOK*

VK3AFW

GIL SONES*

VK3AUI

TECHNICAL EDITORS:

BILL RICE*

VK3ABP

KEN PALLISER

VK3GJ

CONTRIBUTING EDITORS:

BOB ARNOLD

VK3ZBB

BRIAN AUSTIN

VK3CA

ROD CHAMBERS

VK3JQ

SYD CLARK*

VK3ABC

RON FISHER*

VK3OM

DAVID HULL

VK3ZDH

ERIC JAMIESON

VK3LP

KEN JEWELL

VK3AKK

PETER MILL

VK3ZPP

KEVIN PHILLIPS

VK3AUQ

LEN POYNTER*

VK3ZGP

DRAFTING:

ALL DISTRICTS DRAFTING SERVICE

KEN GILLESPIE*

VK3KQ

PHOTOGRAPHER:

REG GUDGE

BUSINESS MANAGER:

PETER COOD

VK3CIP

ADVERTISING:

PETER SIMMONS

*Member of Publications Committee

Enquiries and material to:

The Editor,
PO Box 2611W, GPO Melsb., 2001

Copy is required by the first of each month. Acknowledgment may not be made unless specifically requested. All important items should be sent by certified mail. The editor reserves the right to edit all material, including letters to the Editor and Hemads, and reserves the right to refuse acceptance of any material, without specifying a reason. Advertising: Material should be sent direct to P.O. Box 150, Toorak, Vic., 3142, by the 25th of the second month preceding publication. Phone: (03) 24 8952—Hemads should be sent direct to P.O. Box 150, Toorak, Vic., 3142, by the 2nd of the month preceding publication.

Trade Practices Act: It is impossible for us to ensure that advertisements submitted for publication comply with the Trade Practices Act 1974. Therefore advertisers and advertising agents will appreciate the absolute need for themselves to ensure that the provisions of the Act are complied with strictly. Readers should be aware that, when buying, obtaining or receiving goods from overseas including goods listed in advertisements by overseas organisations in this Journal, Customs import duties and Sales Tax may be levied on the goods at the time of importation. These amounts, if any, are payable by the purchaser unless the terms of sale state otherwise and the seller has made specific provision to this effect in his quotation to the buyer or unless other prior arrangements are in force between the buyer and the seller.

Printers: EQUITY PRESS PTY. LTD.

58-52 Ingleton Street, Collingwood, 3066

Tel.: 41-5054, 41-5055

QSP — INTRUDER WATCH:

We have the guns, give us the ammunition

There are some vociferous amateurs who go about claiming the Institute's handling of various questions lacks fire and brimstone.

Without getting involved in side issues, what have they done when the Institute needed assistance?

Let me quote one example: The Intruder Watch.

Much more publicity than usual has been given to intruder watch this year, both in AR and on the Federal broadcast tapes. Many more reports are required from members if the Institute's voice is to become effective. Intruder watching is a sideline anyone can help with — licensed amateur and short wave listener alike.

POOR RESPONSE

What has been the response? According to the Federal Intruder Watch Co-ordinator, Alf Chandler VK3LCL, the response has been negligible. In fact, the response could be counted as negative because amateurs say nothing seemed to have been done about "the woodpecker" in particular, so why waste time on intruder watching.

I can tell you this. The combined diplomatic and other approaches to the Russian authorities by the Governments of the U.S.A., United Kingdom and others have not resulted in the removal of "the woodpecker". However, "the woodpecker" is not the only intruder problem.

Alf sends into the P. & T. Department reports of intruders logged on the amateur bands. The reports have to include details of the quantity of loggings.

MANY MORE REPORTS ESSENTIAL

Unless the Department can point to more than a handful of loggings they are disinclined to take any action. This has been the state of affairs for years. So Alf is compelled to search for other avenues for redress. One of these is action through Intruder Watch Co-ordinators in other countries. If they also can detect and report the intruder they can sometimes get their own Administrations to take action. Several examples of this are on record.

The trouble is that an intruder causing chaos to amateurs in Australia may or may not be audible overseas. Our Administration will not take action on merely a few reports. Unless they have enough complaints to make a report to the IFRB of the ITU the intruder may get itself registered in the absence of a report of harmful interference. It then becomes "legitimate" and cannot be removed.

For example, why do you think there are so many broadcasting stations wielding muscle between 7.0 to 7.1 MHz — a world-wide exclusive amateur band. Oh yes, this will be taken up very strongly at WARC79, but where is the ammunition?

GUNS ARE USELESS WITHOUT AMMO

We have the guns but no ammunition. Each amateur should be busy making bullets to fire — namely, constantly reporting details of intruders to the Intruder Watch. The Intruder Watch has the strong support of the Institute.

Will you help with ammunition? Give us plenty and we'll keep firing the guns. Adequate fire power is essential.

D. A. WARDLAW VK3ADW
Federal President.

QSP

RTTY GROUP NEW DIVISION

From ARWISSE, Vol. 1, No. 5, the official magazine of the NSW Division RTTY Group, comes news that the AGM of the Group was held on 2nd June at the WIG in Crown Nest. Peter Mulligan VK3ABW was appointed chairman for the ensuing year with Bob Teyler VK2AOE as Secretary, and Syd Molen VK2SGG as Publicity and Broadcast Officer. Discussions were held on the proposed new Constitution and the proposal to go national. The Group aim to gain RTTY privileges for Novices and included a questionnaire soliciting signatures to support this move.

432 MHz INTERFERENCE

The RSGB reports in Radio Communication August 1978 432 MHz interference centred on 432.5 MHz \pm 3 MHz from a new radiolocation system. This system, called Syteld, is reported to be used by BP-Shell and the RSGB have protested about its use within the amateur band.

APOLOGIES TO ADVERTISER

In the advertisement for Emona Electronics in the centre pages of August and September issues of AR, our printer inadvertently reversed the prices for the Dentron MLA-2500 Linear Amplifier and the Dentron MT-2000A Antenna Tuner.

The MLA-2500 Linear Amplifier should have carried the price of \$1390 and the MT-2000A Antenna Tuner should have been \$269.50.

We apologise to Emona Electronics for the inconvenience caused and also to many of our readers who must have thought that Father Christmas really did exist.

GOVERNMENT ANNOUNCES ETHNIC T.V. TO COMPELCE 1979 ON U.H.F. — DETAILS NEXT ISSUE

THE WINNER

OF THE DICK SMITH/
YAESU 'WIN A TRIP
FOR TWO TO TOKYO'
CONTEST - Judged by
Jim Rowe, Editor of
Electronics Australia.



Dick Smith and Ray Jessup
holding the winning entry.

Ray Jessup

Ray, VK2NVJ, bought a Yaesu FT-7 transceiver from our Gore Hill store in June. He uses it regularly to contact his son in New Zealand. Ray is currently studying for his full amateur license.

HERE IS THE WINNING ENTRY:

*Provide amateur radio as an antidote to current frustrations confronting youth...
Prests: Your life is easier if your kids have a good hobby. Amateur radio is a
rewarding and challenging hobby, leading to: Practical application of maths, English
and logic... Self discipline... Responsible citizenship... New and worthy
friendships... Job opportunities...*

THIS IS RAY'S TRIP OF A LIFETIME -

Congratulations from Dick Smith Electronics and Yaesu!

VIC. WESTERN ZONE CONVENTION

at

BALLARAT

NOVEMBER 4th and 5th

Further details and bookings
for Dinner to

VK3ZBS or VK3ZHH

QSP

NEW MEMBERS' SUBSCRIPTIONS

Please note, when you join the WIA you pay a full year's subscription.

This subscription is then split into two parts for accounting and membership purposes. One part is set aside as the pro rata amount owing for the balance of the calendar year to 31st December. The other part is the credit into the ensuing year. In December you will be sent a subscription notice for the full year subscription, 1st January to 31st December, less the credit brought forward from your first payment. After that you stay on the calendar year subscription ending 31st December. Subscription notices are printed early in each December from the computer file using the same address on file for the distribution of your December AR for that year.

When you join the WIA your subscription period begins with the month your first AR is despatched to you. Membership of the WIA is membership of the Division in which you reside and it is that Divisional Council which votes for acceptance of you as a member. Thus your application for membership could be at least a month or two in advance of your subscription membership because of processing at Divisional level and mailing the application to batches to the Executive office where ED processing occurs.

If your joining date is late in the calendar year, say October or November, you would carry forward quite a large credit into the following year and thus you would only owe quite a small amount in cash for the ensuing year's subscription. This is where we have a little problem with the present computer programme because the threshold level is quite small for amounts owing before the automatic AR address label cut-off comes into operation. Even though you might only owe say \$2 or \$3, the cut-off will occur unless it can be manually cancelled. Since, for economy reasons, the office staff is small in numbers and they are heavily engaged in processing outgoing notices and incoming payments at the turn of the year, there is not sufficient time to devote to going through the entire lists to extract details of those who owe only small amounts for the purpose of cancelling the automatic cut-off for these members.

The best way for every member to avoid AR being cut off is to pay promptly. If by some mischance you do not receive a subscription notice before about mid-January do please send in right away what you think is the proper amount owing for the year ahead. It is much better this way than waiting a month or more to see if AR arrives or not. If you see unfinancial at the cut-off date there will be no computer label for you - it is quite automatic and impersonal.

Late payers of subscriptions always risk one or more of the missing ARs being out of print. Again, for economy reasons, it is necessary to restrict the number of "overs" (overprints) of AR to a minimum.

STOP PRESS

AX7 PREFIX

Approval has been granted for VK7 amateurs to use the "AX7" prefix from 1400 GMT 3.11.78 to 1400 GMT 5.11.78 incl. to commemorate the 175th anniversary of Lt. John Bowen's (R.N.) landing at Nisdon Cove in 1803.

Official station AX7 W1 will operate from the Tasmanian Hobart Radio Convention on Nov. 3-Nov. 5.

Commemorative QSL's will be used for all AX7 contacts.

WIRELESS INSTITUTE OF AUSTRALIA

Federal President: Dr. D. A. Wardlaw VK3ADW

Federal Council:

- VK1 Drig R. K. Roseblade VK1QJ
- VK2 Mr. T. I. Mills VK2ZTM
- VK3 Mr. J. Payne VK3AED
- VK4 Mr. M. F. Wilson VK4FP
- VK5 Mr. L. J. Hunt VK5DX
- VK6 Mr. W. H. Penfold VK6NE
- VK7 Mr. P. D. Frith VK7FP

Staff: Mr. P. B. Dodd VK3GCF, Secretary.
Part-time: Col. C. W. Perry, Mrs. J. M. Seddon and Mr. P. Simmons (AR advertising).

Executive Office: P.O. Box 150, Toorak, Vic., 3142.
2/517 Toorak Rd., Toorak, Ph. (03) 24 8652.

Divisional Information (all broadcasts are on Sundays unless otherwise stated):

ACT:

President — Mr. E. W. Howell VK1TH
Secretary — Mr. Ted Rodolakis VK1TR
Broadcasts — 3570 kHz & 148.5 MHz: 10.00Z.

NSW:

President — Mr. D. S. Thompson VK2B0T
Secretary — Mr. T. I. Mills VK2ZTM
Broadcasts — 1025, 3580, 7148 MHz, 28.47, 52.1, 52.55, 144.1, Ch. 8 and other relay stations: 01.00Z. (Also Sunday evenings — 09.30Z and Hunter Branch, Mondays 09.30Z on 3570 kHz and ch. 3 and 8).

VIC:

President — Mr. E. J. Bugges VK3ZJN
Secretary — Mr. J. A. Adcock VK3ACA
Broadcasts — 1025, 3580, 7150 kHz — also on fm, 2m 5.9B and 2m Ch. 2 repeater: 00.30Z.

QLD:

President — Mr. A. J. Aarae VK4QA
Secretary — Mr. W. L. Gille VK4ABG
Broadcasts — 1025, 3580, 7148, 14342, 21175, 29400, kHz: 2m (Ch. 42, 48): 06.00 EST.

SA:

President — Mr. C. J. Hurst VK5HI
Secretary — Mr. C. M. Pearson VK5PE
Broadcasts — 1020, 3550, 7095, 14170 kHz: 28.5 and 53.1 MHz, 2m (Ch. 8): 08.00 S.A.T.

WA:

President — Mr. L. A. Bell VK6AN
Secretary — Mr. P. Savage VK6NCP
Broadcasts — 3000, 7080, 14100, 14175 kHz, 52.550 and 2m (Ch. 2): 01.30Z.

TAS:

President — Mr. I. Nicholls VK7ZZ
Secretary — Mr. M. Hennessy VK7MC
Broadcasts — 3570, 7130 kHz: 06.30 EST.

NT:

President — Dick Klose VK8ZDK
Secy-Pres. — Barry Burns VK80J
Secretary — Graeme Challinor VK8GQ
Broadcasts — Relay of VK5WJ on 3.55 MHz and on 148.5 MHz at 2330Z. Glow more transmission by VK8HA on 3.55 MHz at 1000Z almost every day.

Postal Information:

VK1 — P.O. Box 48, Canberra, 2606.
VK2 — 14 Alchison St., Crow Nest, 2068 (Ph. (02) 43 5795 Tues & Thurs (10.00-14.00)).
VK3 — 412 Brunswick St., Fitzroy, 3088 (Ph. (03) 41 3535 Sat 10.00-12.00h).
VK4 — G.P.O. Box 535, Brisbane, 4001.
VK5 — G.P.O. Box 1254, Adelaide, 5001 — at West Thebarton Rd., Thebarton (FH) (08) 254 7442).
VK6 — G.P.O. Box N1002, Perth, 6001.
VK7 — P.O. Box 1010, Launceston, 7250.
VK8 — Incl. with VK65, Darwin Air Mail, P.O. Box 37317, Winnieville, N.T., 5788.

Glow more transmissions — most week-day evenings about 08.30Z onwards around 3850 kHz.

VK QSL BUREAUX

The following is the official list of VK QSL Bureaux, all are inwards and outwards unless otherwise stated.

- VK1 — QSL Officer, G.P.O. Box 1175, Canberra, A.C.T. 2601.
- VK2 — QSL Bureau, C/- Hunter Branch, P.O. Terribly, N.S.W. 2284.
- VK3 — Inwards QSL Bureau, Mr. E. Trebilcock, 340 Gillies Street, Thornbury, Vic. 3071.
- VK3 — Outwards QSL Bureau, Mr. R. R. Prowse, 83 Bower Road, Bentleigh, Vic. 3204.
- VK4 — QSL Officer, G.P.O. Box 538, Brisbane, Qld., 4001.
- VK5 — QSL Bureau, Mr. Geo. Luxon VK8RF, 203 Belair Road, Torrens Park, S.A. 5062.
- VK5 — QSL Bureau, Mr. J. Rumble VK8RU, G.P.O. Box F319, Perth, W.A. 6001.
- VK7 — QSL Bureau, G.P.O. Box 371D, Hobart, Tas. 7001.
- VK8 — QSL Bureau, C/- VK8HA, P.O. Box 37317, Winnieville, N.T., 5788.
- VK8, 0 — Federal QSL Bureau, 25 Landale Street, Box Hill, Vic. 3138.

WIANEWS

POSTAL AND TELECOMMUNICATIONS DEPARTMENT LETTERS

Two letters from the Department during August. The first concerns candidates for the Novice examination who live in remote areas and is referenced RB4/11/30 of 31-7-1978. This is the text of that letter—

"In appreciation of the geographical problems facing prospective novice candidates living in remote areas the Department has decided to implement the following procedures.

Special Examinations:

Examinations in addition to the normal scheduled dates may now be conducted in Capital Cities and Regional Offices of the District Radio Inspector for candidates who reside more than 80 kilometres from the nearest office of the Department.

Conduct of Examinations:

Radio Inspectors may conduct examinations in remote country areas during routine visits to that area. This will allow some candidates who otherwise could have difficulty in attending the main centres to avail themselves of this facility. It is important to note, however, that a request for an examination should not serve to initiate a special examination itinerary.

It is important to note that the number of candidates should be sufficient to make the examination economically viable."

This is a subject which the Institute has been pressing the Department for a satisfactory solution for a long time. In fact the WIA's submission about Novice exams actually went much further than this—please see AR for September 1977, pages 20 and 21.

At a meeting of the Joint WIA/Departmental Committee on 22nd August clarification was sought concerning the number of candidates to make an exam worthwhile in a distant centre. A figure of about ten guaranteed candidates was mentioned but this depended upon circumstances as, for example, an RI visiting the centre anyway in the course of other duties.

HOW TO SET ABOUT GETTING AN EXAM IN A REMOTE CENTRE

The way to go about getting a Novice exam in your town is for the group leader or instructor to write to the State Superintendent giving details of all the candidates and, most importantly, suggesting some local hall or classroom which he has previously ascertained would be made available for the exam.

The second letter from the Department was in reply to a WIA request resulting from a decision made at the WIA 1978 Federal Convention. The details are now well known but members would like to know how it read. This letter was also referenced RB4/11/30, and was received on 8th August, having been posted on the 7th. The letter is referenced in full in "Novice Notes" under WIA correspondence.

On the same day it was received, advice was telephoned to Federal Councillors and many Novices were quick to spread out up to 3625 kHz. The news arrived in time for the RD Contest and it will be interesting to see how many Novices participated in it.

JOINT COMMITTEE

At the August meeting most of the time was occupied in discussing the examinations and licensing areas. Graeme Scott, the Federal Education Co-ordinator, presented to the Department the bank of multi-choice Novice questions prepared by his WIA helpers. This bank consisted of over 600 questions from which a paper of 50 typical questions is to be selected for inclusion in the proposed printed edition of the WIA Novice syllabus and study guide.

THE AOCP SYLLABUS

After some discussion it became apparent that work on the official AOCP syllabus has not yet been completed. It is ready in time the Departmental representatives believed it should be

SCALAR

for Hatfield Instruments

High Power H.F. Transformers
Wide Band Matching Trans-
formers; Antenna Matching
Units; High Power
Matching Units;
Hand-Held Decibel
Meter; VHF Signal
Dividers; Coaxial
Switches; Coaxial
Relays; R.F. Bridge;
Modulators; Screened Mixers;
Psophometer; Low frequency Modulators;
Hybrid Units — Passive Couplers; Aerial Matching
Units; Three and Five Port Wideband Units;
Universal Milliwatt Test Set; Double Balanced



Mixers;
Subminiature Double
Balanced
Mixer;
Low Frequency
Double
Balanced

Mixers; Decade Resistance Boxes; Decade Capacitance Box; Programmable Attenuator Units;
Balanced Attenuators; VHF Variable Attenuator;
Level Measuring Set; Radio Frequency Attenuators;
Level Measuring Sets; Passive Power Dividers;
Switched RF Attenuators.



SCALAR

Distributors Pty Ltd

VICTORIA: 18 Shelley Ave., Kilsyth, Vic., 3137. Ph: 725-9677
Cables: WELKIN, MELBOURNE. Telex: AA34341.

Gld.: 969 Ann Street, Fortitude Valley 4006
Telephone (07) 52 2594. Telex AA 43007 WELKI.

possible for the August 1979 AOCF theory exam to be of the multi-choice variety. Consequently the next AOCF exam in February would be the traditional essay type. Once again the WIA, through the Federal Education Co-ordinator, would arrange the preparation of a bank of suitable questions for presentation to the Department.

EXEMPTIONS FROM THEORY EXAMS

What were the criteria, asked the WIA representatives, for exempting certain people from having to sit for the theory exam? The Department did not grant automatic exemption, but in each case examined the syllabus which was used for the qualifications claimed by any candidate. It had been found in the past that, although the candidate's qualifications appeared to far exceed the AOCF standard, nevertheless a number of specific subjects had not been studied — e.g. harmonic generation and interference from transmitters.

The Departmental officers enquired about comments received on the last Novice exam. Feedback from candidates indicated the standard was quite reasonable but that much dissatisfaction was expressed about the long delays in obtaining a licence by those who passed.

LICENSING DELAYS

The delays in issuing licences was noted as particularly irksome in Victoria although this was not the only State affected. The documentation involved with licensing was generally considered to be antiquated. The WIA will continue to exert pressure to have licensing delays reduced to a minimum.

RECIPROCAL LICENSING

A WIA enquiry elicited the fact that reciprocity existed only with those countries listed in a letter from the Department printed on page 17 of AR for August 1978.

The WIA representatives, consisting of the Federal President, David Wardlaw, Peter Wolfenden and Graeme Scott re-raised a number of items many of which have been in the system for some time. One matter which at long last appears to be nearing a conclusion is the WIA request some years ago for reduced licence fees for pensioners and disabled amateurs, see AR December 1976, page 5.

FINAL ANSWER EXPECTED IN 3 OR 4 MONTHS

SUBSCRIPTIONS 1979

At the Executive meeting in August much time was spent closely examining the financial situation in order to relate this to a budget for 1979.

THE FEDERAL COMPONENT OF WIA SUBSCRIPTIONS HAS NOW REMAINED UNCHANGED SINCE 1976. In effect this really means that there has been a continuous REDUCTION in Federal

dues when related to inflation.

INFLATION CAUSES REDUCTION IN FEDERAL DUES

Next year is the big year for expenses related to WARC 79. The WARC levy last year helped towards the funds accumulated for this purpose but an appeal is shortly to be made for NON-members of the Institute to make some contribution.

Apart from this, costs of AR have risen sharply, especially in postages, and other office expenses are increasing.

Nevertheless, after a long discussion, the Executive decided to recommend to the Finance Sub-Committee that there should be no change in the Federal dues for 1979. The total amount should remain at \$15.00. At the time of writing it is not known if the WIA's financial experts will accept this. They might deem it prudent to recommend some increase to avoid eating into reserves. IT WAS EMPHASISED THAT HOLDING THE FEDERAL DUES AT THE 1978 LEVEL DEPENDED LARGELY UPON A CONTINUED UPSURGE IN MEMBERSHIP.

At the same time a short discussion ensued on the kind of subscription notice to be printed for 1979 onwards and on balance it was decided NOT to have one with a counterfoil.

PROJECT ASERT

Also during August, the VHFAC discussed at great length the PROJECT ASERT, briefly outlined on page 48 of last month's AR. Dr. McCracken attended the meeting and explained his proposals in detail. It was agreed however that some preliminary caution should be exercised and consequently a small pilot committee will set the thing in motion. The pilot committee consists of Bob Arnold VK3ZBB as chairman, Dr. McCracken (VK2CAX) himself as scientific advisor, and Les Jones VK3BKF as hardware co-ordinator.

TV CHANNEL 5A

Yet again the prospect of increasing usage of TV Channel 5A occupied the time of the Executive and the VHFAC. Peter Wolfenden prepared and recorded three segments of the Federal tapes broadcast during August. Further technical information was awaited so as to prepare a proper submission to the Minister and to include a very strong recommendation that UHF television should be the goal rather than the proliferation of non-standard channels such as 5A and 0.

Various other items of interest in the pipeline will have to be left over until next month.

NEXT NOVICE EXAM

Clarification was finally obtained from the Department about the date of the next Novice examination — this will be 21st November for all States EXCEPT VICTORIA, which will be on Saturday, 25th November.

QSP

JOTA

A reminder about Jamboree on the Air, the 21st. Begins about 3.00th local time on 21st October and ends 46 hours later. If you can help out by providing and manning a station for a Scout or Guide group contact your local Scout JOTA organizer right away. Here is an excellent opportunity to show your amateur radio prowess — Novices, Limiteds and Full Calls can all participate. The Australian Radio Scout net will operate on 1st and 2nd Sundays in September and the 1st Sunday in October — listen on 7070 kHz from 08.30h for VK4QH which might later QSY to 14290 kHz. Perhaps next year a special Scout Novices' net might be organised on frequencies available to the Novice amateur operator.

IT IS NOT TOO LATE TO JOIN WITH SCOUTS AND GUIDES IN JOTA 1978.

The opening JOTA ceremony will be on air from VK1BP at 14.00h EAST on Saturday, 21st October, which will include greetings from the Chief Scout, Sir Zelman Cowen, the World JOTA organizer and Les Mitchell, the founder of JOTA. The frequencies will be close to 7090 kHz and

14290 kHz, the official World Scout frequencies. The World Bureau JOTA will be on air as HBBS/ portable from near Geneva and should hopefully be on the 21 and 28 MHz bands so that Novices can have a chance to work this station.

ARTICLES FOR AR

We are always on the lookout for both technical and general articles for publication.

Please forward your submissions to the Editor, P.O. Box 2611W, GPO, Melbourne 3001.

In order to keep a reasonable balance of material published, it is sometimes necessary to hold submitted items for several months, therefore some delays can be expected before the item is actually published.

On receipt of an article, an acknowledgement is sent to the author advising receipt and approximate publication date — but circumstances at the time of finalising an issue may temporarily delay an article.

All items accepted will be published as soon as possible after receipt, and your indulgence is requested if publication has not occurred at the previously notified time.

Technical articles especially require editing by our technical staff and professional drafting of circuit diagrams — this does delay some material for a few months.

We would also request that should authors who submit items to AR and other Australian magazines simultaneously, as a matter of courtesy to all concerned, each magazine be advised that the item has been submitted elsewhere to save embarrassing duplications as have occurred in recent months.

DECORATIONS

Advice has been received that Surgeon Rear-Admiral Jim Lloyd VK1CQR was awarded the Officer of the Order of Australia in the Queen's Birthday list. Also honoured was Jim Wilkinson, awarded the Imperial Service Order.

MICROCOMPUTERS

An insert advertisement in the July 1978 edition of Monitor (the Proceedings of the IREE, Australia) advises that a publication entitled "Microsystems" is published in alternate months in Sydney and costs \$50 for one year. Incidentally, the same issue of Monitor lists Laurie Blagborough VK4ZGL as the Chairman of the IREE Brisbane Division.

*Visiting
Hong Kong*



LET US ASSIST

WRITE FOR
INFORMATION



ALL BRANDS

HF

VHF

UHF

RECEIVERS

ACCESSORIES



Tel. K 36 0606 K 38 3774

**DELTA
COMMUNICATION
SERVICES LTD.**

15 CUMBERLAND ROAD,
KOWLOON-TONG, KOWLOON
HONG KONG

10.7 MHz CRYSTAL FILTERS FOR FM SYNONYMOUS FOR QUALITY AND ADVANCED TECHNOLOGY



KVG

MATCHING CRYSTAL DISCRIMINATORS

NBFM XD107-01
WBFM XD107-02
(1-9) \$22.10 each

EXPORT ENQUIRIES WELCOME

Oscillator Crystals: 50 kHz. through 150 MHz available to order. Parallel resonant (30 pF) to 20 MHz, series resonant above 20 MHz. Write for quotation to your requirements (include mechanical size & frequency).

Filter Type	XF107-A	XF107-B	XF107-C	XF107-D	XF107-E	XF107-SOM
Application	NBFM	BBFM	WBFM	WBFM	WBFM	NBFM
Number of Filter Crystals	8	8	8	8	8	4
Bandwidth	12.0 kHz	15.0 kHz	30.0 kHz	35.0 kHz	40.0 kHz	14.0 kHz
Pass Band Ripple	≤ 2 dB					≤ 1 dB
Insertion Loss	< 3.5 dB	< 3.5 dB	< 4.5 dB	< 4.5 dB	< 4.5 dB	< 3 dB
Input/Output	820 Ω	910 Ω	2000 Ω	2700 Ω	3000 Ω	910 Ω
Termination	25 pF	25 pF	25 pF	25 pF	25 pF	38 pF
Shape Factor	(70 dB) 2.4 (70 dB) 2.3	(70 dB) 2.2	(70 dB) 1.8	(70 dB) 2.0	(70 dB) 2.5	(40 dB) 3.0
Ultimate Attenuation	> 90 dB					> 60 dB
Size	1.27/84" x 1.3/64" x 3/16" High					HC BFC
Mounting Hardware Included	can					can
Price (1-9)	\$40.60					\$15.95

si

**SPECTRUM
INTERNATIONAL INC.**
Box 1084A Concord
Massachusetts 01742 USA

Shipping weights: Filters 2 oz. ea., Crystals 1/8 oz. ea.
Registration Fee: \$2.00; Air Mail: \$10 per 1/2 oz.
All Prices in U.S. Dollars.

AMATEURS' PARADISE

BUY FROM QUEENSLAND'S STOCKIST

SEE OUR RANGE OF

KENWOOD GEAR — TS520S, TS820S, DG5 Digital Readouts,
DC Convertors, VFOs, Speakers. WHY WAIT? ALL IN STOCK.

VICOM AGENT for the GOLD COAST — check our ICOM
equipment in stock.

SOLE DISTRIBUTORS for QLD. of the new **BEN LINEAR**

AMPLIFIERS — Models for all bands — 70-120 watts — all the
one price, **\$159** — a beautiful unit.

Also ROTATORS, VHF and UHF Beams, all band VERTICALS,
BALLUNS, FT7s, FRG7s, FT101E MORSE KEYS,
WORLD MAPS, ZL CALL BOOKS, MIKES, CLOCKS,
LP FILTERS, SWR METERS, etc.

121 NERANG STREET, SOUTHPORT, QUEENSLAND 4215
(Opp. Southport Hospital) **Telephone: (075) 32 2644**

Sideband Electronics Sales

Distributors of COMMUNICATIONS TRANSCEIVERS

H. F. TRANSCEIVERS

TRIO KENWOOD	T.S. 820 S	P.O.A.
TRIO KENWOOD	T.S. 520 S	P.O.A.
TRIO KENWOOD	V.F.O. 820	\$185
TRIO KENWOOD	V.F.O. 520 S	\$150
TRIO KENWOOD	S. P. 820	\$ 65
TRIO KENWOOD Pan Display	B.S. 8	\$ 60
TRIO KENWOOD Pan Display	B.S. 5	\$ 60
TRIO KENWOOD	D.S. 1A	\$ 79
TRIO KENWOOD	Communication Receiver R. 820	T.B.A.
TRIO KENWOOD	A.T. 200	\$175
TRIO KENWOOD	ANTENNA TUNER	
D. 5 Digital Display & Counter		\$185
TRIO KENWOOD	T.R. 7400 A	\$440
TRIO KENWOOD	P.S. - 8	
AC Power supply for T.R. 7400 A		\$166
TRIO KENWOOD	S.M. 220	\$319
Station Monitor Panoramic Adaptor optional		
TRIO KENWOOD Amplifier	T.L. 922 linear	T.B.A.

PLEASE WRITE FOR OUR VERY COMPETITIVE PRICES ON KENWOOD PRODUCTS. WE ALSO CARRY ALL SPARE PARTS FOR KENWOOD EQUIPMENT, BACKED BY FAST AND EFFICIENT SERVICING.

FROM F. D. K.

Multy Palm hand held 2M FM transceiver 8 channel	
Niced battery charger very attractive	\$199.90
F. D. K. Multy 2700	\$744
F. D. K. Multy 800 - D latest model with new type remote control mic.	\$416
F. D. K. type two 800 channels	
25 watts output	\$398

RTTY UNITS

DOVETRON MPC - 1000 - R - E	\$1,200
HAL ST - 5000	\$350
TELECODER: Similar to MPC 1000	\$700
TELECODER 500	\$300
INFOTECH Keyboard Mod 150	\$397.50
INFOTECH Vido Conv. Mod 75	\$448
TELECODER Kit also available	
TSR - 500 Complete 200 character UART FIFO Regenerator	\$250

Go RTTY with DOVETRON'S MPC - series multy path Diversity Terminal Units. The Rolls Royce of all terminal units. We are appointed distributors.

HAL ST 5000 - Economy terminal unit. 170-450-850 shifts.

We have locally built units for lower prices.

SOON AVAILABLE - SSTV with Robot 400

\$898

VIDEO DISPLAY UNITS

KEY BOARDS - Write for PRICE DETAILS

DENTRON DTR-1 250 WATTS P.E.P. ALL AMERICAN MADE. SOLID STATE H.F. TRANSCEIVER 160 - 10 METRES, DIGITAL DISPLAY AND STANDARD PLUG IN P.C. BOARD. CONSTRUCTION 2.1 KC 8 POLE FILTER, 9 M.H.Z. IF 50 C/S AND 1 - KHZ ACTIVE AUDIO FILTER, STANDARD 25 KHZ CALIBRATOR VOX NOISE BLANKER IS STANDARD.

WRITE FOR MORE INFORMATION
ALL THESE EXCITING FEATURES FOR ONLY

\$725

AC Power supply for above

\$125

DENTRON MLA - 2500 Linear Amplifier

\$1,300

DENTRON Antenna Tuners

M.T. 3000A

\$447

M.T. 2000A

\$269.50

J.R. Monitor

\$103.50

H.F. ANTENNAS

HUSTLER 4 - BTY vertical trap ant. 10 - 80	\$130
WILSON: System one 4 element 3 band	\$339
WILSON: System two 3 element 3 band	\$279
HADAKA VS 40-80 Vertical	\$115
HADAKA VS 33 Tribender	\$265
HADAKA VS-22-3 Element 15-10 in balun	\$173
HADAKA VS-RG Radial kit for VS 41	\$33.50

SKY-BAND MOBILE HELICAL ANTENNAS

SKY 80 six feet long 3.5 MHz	\$ 28
SKY 40 six feet long 7.060	\$ 26
SKY 20 six feet long 14.150	\$ 26
SKY 15 six feet long 21.100	\$ 25
SKY 10 six feet long 28.500	\$ 24

ANTENNA ROTATORS

F.U. 400 All approved with external low voltage supp. Other types soon available

\$139

YAESU MUSEN TRANSCEIVERS

PLEASE WRITE FOR VERY COMPETITIVE PRICES

CRYSTAL FILTER, 9MHz, similar to

FT-200 ones. With carrier crystals.

\$ 35

AUSTRALIA'S SOLE DIST. OF KLM PRODUCTS

KLM SOLID STATE POWER AMPLIFIERS

(MHz)	144-148 PA10 - 80BL	80 OUTPUT (watts)
"	PA10 - 140BL	140 "
"	PA10 - 160BL	160 "
"	PA2 - 70BL	70 "
"	PA2 - 12B	12 Watts
"	PA2 - 25BL	25 Watts P.O.A.
	400-470 PA10 - 70CL	70 "

For personal attention: 24 KURRI STREET, LOFTUS
P.O. BOX 184, SUTHERLAND, 2232 TELEPHONE: 521-7573

New Shipment expected soon.

SIDEBAND ELECTRONICS SALES OPEN ON SATURDAYS TILL 12 NOON PETER SCHULZ, VK2ZXL

All prices quoted are net SYDNEY, N.S.W., on cash with order basis, sales tax included in all cases, but subject to changes without prior notice. ALL-RISK INSURANCE from now on free with all orders over \$100; small orders add 50c for insurance. Allow for freight, postage or carriage; excess remitted will be refunded.

Sideband Electronics Sales

DISTRIBUTORS OF COMMUNICATION
TRANSCEIVERS

NEW! SKY-BAND MOBILE ANTENNAS

THIS NEWLY DESIGNED UNIQUE MOBILE ANTENNA HELICALLY WOUND EXTRA HEAVY DUTY. SIX FEET LONG, AND CAN HANDLE UP TO 400 WATTS P.E.P.

FEATURES:

Light weight.
S.W.R. better than 1: 1.05 at resonance
Covered with highest grade fireproof insulation
Chrome base with 3/8 24 tpi. thread
Available in colours, grey, white, blue, green
burnt orange, brown and black.

AVAILABLE:

SKY. 80M 3.5 Special Novice
3.65
SKY. 40M 7.06
SKY. 20 14.150
SKY. 15 21.100 and up.
SKY. 10 28.5 and up.

PRICE LIST:

SKY 80 6 feet long 3.5 MHz \$28
SKY 40 6 feet long 7.060 \$26
SKY 20 6 feet long 14.150 \$26
SKY 15 6 feet long 21.100 \$25
SKY 10 6 feet long 28.500 \$24
Swivel mounts and chrome
plated springs for all \$13

All Sky-Band Antennas are carefully designed and have been individually tested. High quality fibreglass rod, wound with optimum thickness of wire to keep weight down, but maintain High Q. An elegant design to those who only want the best. All antennas are factory tuned for the lowest portion of the desired band and can simply be trimmed for your chosen frequency. Yes it is all Australian made! You don't pay for large overheads, instead we use the best material available and offer a mobile antenna which will resonate to our frequencies, unlike the previous overseas designed antennas.

ORDER NOW AND SPECIFY THE COLOUR YOU REQUIRE

New designs on the way similar to the famous 'Band Spanner' from 80-10 metres, tunable centre loaded, to be released soon.



SEND FOR A FREE CATALOGUE AND PRICE LIST



SALES & SERVICE

24 KURRI ST., LOFTUS. N.S.W.
P.O. BOX 184, SUTHERLAND. 2232

OPEN SATURDAYS TILL
NOON. Phone: 521-7573

25 MHz Bandwidth



• 5mV Sensitivity

• 30MHz Triggering

Dual Trace Oscilloscope

at a price you expect to pay for half this performance.

The new BWD 539D is superb for CB Radio, μ Processors, Video recorders, Colour TV, Audio systems, Video games or any application where waveform fidelity and measurement accuracy is essential.

Break through the performance barrier.
Ask for your BWD 539D data sheet today.



BWD

ELECTRONICS PTY. LTD.
Miles Street, Mulgrave, Victoria. 3170.
P.O. Box 325 Springvale, 3171.
Telephone 561 2888. Telex 35115


N.S.W. Amalgamated Wireless (A'asia) Ltd., Sydney. Ph. 688 8111
Q.L.D. Warburton Franki (Brisbane) Pty. Ltd. Phone 52 7255
S.A. Protronics Pty. Ltd., Adelaide. Phone 212 3111
Rogers Electronics, Adelaide. Phone 42 6666
W.A. Cairns Instrument Services, Perth. Phone 325 3144
TAS. Associated Agencies Pty. Ltd., Hobart. Phone 23 1843

AN AUTO SIMPLEXER FOR THE IC22S

The IC22S is an excellent mobile rig, but I am sure every owner has been frustrated by forgetting to switch to simplex when necessary, after changing channels. After the modification (need I say it), you will wonder how you got along without it.

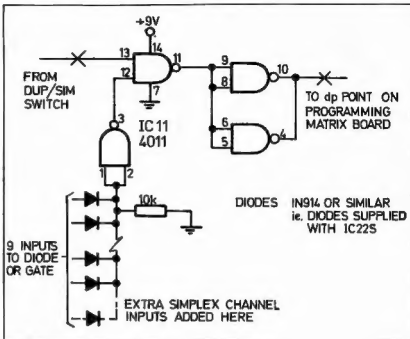

run from 3 diodes to positions 9, 10 and 11 for channels 40, 50 and 51.



GETTING THE BEST OUT OF YOUR SSB

Danzil Roden VK2BXF
7/168 Herring Road, North Ryde 2113

A casual tune around the amateur bands will bring to light all kinds of signals purporting to be SSB voice transmissions. Lots are from home-brewed gear but many of them emanate from commercially produced equipment. It is evident that many amateurs are not getting the best results from their stations.

A most common source of trouble is the incorrect alignment of the carrier insertion oscillator frequency with respect to the wideband filter. This has been found to be a fault even with brand new commercially made amateur equipment, so a check of the positioning of the oscillator frequency is well worthwhile initially, and again after a couple of years operation.

Natural ageing of crystals used in the carrier oscillator and in lattice filters can itself cause misalignment to occur. Ageing is the process of the settling down of the atomic structure of the quartz, after this has been disturbed through cutting, grinding, etching and plating, etc., in much the same way as time has to be allowed for relaxation of winding tensions in copper wire and plastic bobbins, before maximum inductance stability may be obtained with precision pot core coils.

A new crystal can be expected to shift in frequency by up to 500 Hz or, in some cases, with cheaply produced crystals, by as much as 1000 Hz, in the first year or its of manufacture.

Some of the more professional manufacturers pre-age the crystals they use. Ageing can be accelerated by placing the crystals in switched oscillators and temperature cycled ovens. However, when one considers the vast numbers of crystals in new equipment every year, it is obvious the process is very costly in time and space, so crystals supplied in new equipment are unlikely to be aged.

Government disposals crystals, such as the FT243 style, have been lying around for a great many years and are very useful as they are fully aged. Even so, where slight changes in their frequencies are made, new ageing problems may be introduced.

FILTER RESPONSE

The carrier oscillator frequency, generally, is positioned about 20 dB down the skirt of the filter, though it does depend upon the filter shape. Some filters are symmetrical while in others the skirt is steeper on one side, giving greater rejection of the carrier oscillator frequency.




FIGURE 1

The 20 dB point can be taken to correspond to 300 Hz outside the point of 6 dB attenuation. So, in Fig. 1, the filter will accept frequencies between 300 and 2700 Hz above or below the CIO frequency for USB and LSB respectively.

Considering a USB exciter, the transmission will contain frequency components corresponding to voice frequencies in the range 300 to 2700 Hz.

Were the CIO misplaced, 500 Hz low, the voice range would be restricted to between 800 and 3200 Hz. This would have the effect of eliminating a great deal of the basic components of intelligibility of the speech. This results in the transmission being extremely difficult to tune at the distant receiver and causes the transmission to suffer more from propagation and interference problems. Though it may still be possible to distinguish what is said, the speech sounds thin and unnatural.

With the crystal frequency placed too high, the top end of the voice range is restricted, giving a woolly or muffled sound, lacking in clarity and again making the receiver tuning tricky.

Due either to uncertainty or politeness, one will find that only about one of every ten average amateurs will report such a transmission defect without prompting. The answer is for you to check your own gear for yourself.

ADJUSTMENT TECHNIQUES

There are various ways in which CIO alignment may be checked. These are described in greater detail in the various handbooks, but the method employed is decided by the availability of test equipment. I shall outline various approaches to the problem which I hope will prove helpful to those with limited access to equipment.

In the ideal situation where one has access to top notch test gear, the direct method of measuring the filter response can be used. A signal generator having a slow tuning rate is connected at the input to the IF strip, containing the SSB filter. An RF voltmeter is connected at the output of the IF amplifier following the filter. Then as the generator is carefully tuned across the filter passband, a plot may be made of output voltage against generator frequency, the frequency being measured accurately using a counter. A type BC221 frequency meter is useful as a calibrated generator for the purpose.

Thus the frequencies at which 6 dB attenuation occur can be established and hence the upper and/or lower CIO crystals may be set using the counter or BC221.

In this manner the response may be plotted of a filter not wired into an equipment, provided the filter is terminated with the correct impedance at input and output as specified in the filter data sheet. Later when the equipment is assembled, the information can be used to adjust the oscillators.

Alternatively, a receiver CIO may be aligned using an uncalibrated signal generator, tuned to any band — preferably an LF band as tuning becomes easier — connected to the receiver aerial terminal. Then as the generator is tuned across the receiver passband, the varying beat frequency between the signal and the CIO is measured at the receiver audio output, by means of a counter, or other more traditional methods of audio frequency measurement.

The audio output level can be metered, though AGC can alter linearity of readings. Otherwise the receiver "S" meter will give a close enough indication of 6 dB attenuation. The CIO trimmer can be adjusted directly to produce an audio output frequency range from 300 Hz to 2700 Hz between the —8 dB points of the receiver response.

TRANSMITTERS

Where a transmit-only unit is to be aligned, a frequency calibrated audio generator is fed into the microphone socket and with minimal drive to the PA, the RF output level can be measured at the aerial socket of the transmitter, using a VTVM power meter or even an SWR meter. Again, the input frequency range should be 300 Hz to 2700 Hz between the —6 dB points.

Without even an audio generator, a most basic, if rather crude method, is to

unbalance the balanced modulator and adjust the CIO crystal trimmer, measuring the change in transmitter output level as the CIO is tuned around the filter skirt. This, of course, is only possible where the trimmer capacity range is sufficient for adjustment from the top of the filter response down to just below the 20 dB point. One well known brand of transceiver I once set up, did not have enough trimming range to allow the upper and lower CIO crystals to be set to their correct

frequencies. It was necessary to remove a fixed capacitor in parallel with the trimmer in one case and to add capacitance in the other. So do not rely too much on your kilobuck equipment designers!!

With transceivers, CIO misalignment is not always so obvious in the receive mode, so the Old Timer's adage that excellent reception is not proof of good transmission holds true again.

Just by listening around the bands, one

will realise that SSB transmissions can result in really pleasant audio quality, and in a lot of cases can almost equal hi fi!

When you tire of trying to find a microphone that sounds right, just check the basics. Don't take anything for granted, especially if you have a rugged voice like mine — fortunately for you all, I'm a CW man! I hope this general information will help someone to achieve better two-way performance. ■

TRY THIS

WITH THE TECHNICAL
EDITORS

A SIMPLE GUNNPLEXER 10 GHz LINK

Paul Jacobs W2IOG

Here is a simple Gunnplexer hook-up that WA2ZKD and W2IOG have been using for several months now. It has been very easy to use, and we have had a lot of fun "hi-topping" with them. I suggest you make one or both of your units portable, as the spots you have to get to for line of sight paths are not always accessible by road (even with 4-wheel drive).

Start your initial tune-up with the units only a few hundred feet apart. Set the varactor bias on the free running unit to about 4 volts. On the "AFCD" unit set S_1 to position 1 (manual) and S_2 to position 2 (tuning voltage). Tune the bias pot until you hear the converter noise quiet, and note the M, reading. If it reads between 2.5 to 5.5 volts, you can switch S_1 to the AFC position and you should be "locked". If not, adjust the GPX manual tuning until you can acquire signal in the 2.5 to 5.5 volt range. Then move the S_2 to "AFC" and lock the two units. Now switch S_2 to read AFC voltage and tweak the GPX manual tuning until M, reads exactly 4 volts. Now you should be "locked" at exactly centre tuning on your converter. If the FM receiver on the other end is now tuned to the same frequency as yours, you will have a two-way audio path.

If your units won't lock with the above procedure, it means you are tuned to the wrong side of carrier. Just tune the manual frequency adjust until you get another signal, and try again.

Once these adjustments are made, you need only set up at your "DX" location, aim your antenna, switch to manual and tune near 4 volts until you acquire signal. Then flip S_1 to AFC and you are in communication!

Good luck and good DX.

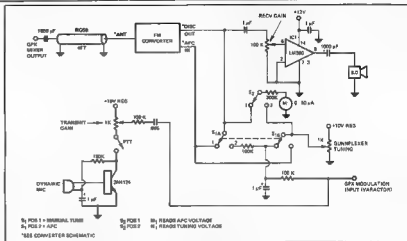


FIG. 1: Gunplexer IF, Audio, AFC and Modulator (use one end of link only)

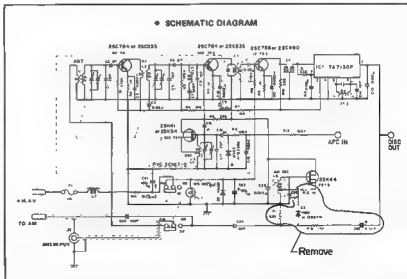


FIG. 4 (Above): Schematic Diagram




FIG. 3 (Left): 10 volt Regulator for Gunnplexer will hold Regulation down to 10.5 volts on Input

WITH THE TECHNICAL
EDITORS

Bill Pearson VK2LH

Having fully suppressed the Ignition system on my HQ I was still troubled by the rough noise caused by the vibrating voltage regulator. All my attempts to bypass with capacitors and shielded cable between alternator and regulator were only marginally successful. The noise was completely eliminated by winding 30 turns of about 18 SWG enamel wire on two small toroid cores and connecting them in series with the "D" and "F" leads at the terminals of the regulator.

The ignition system is fully shielded with braid and tinplate, but the toroids made a tremendous difference. ■




FIG. 1: Torroid Connections

USP

10 GHz TESTS

A 10 GHz contact was made on 25th March 1978 between VK2AHC at Jarvis Bay and VK2JJ at Stanwell Tops, a distance of 94 km. Signals were R55S. Thus while no new records were made much valuable experience was gained. Various tests were also made on 3.3 GHz. The Propagator, April 1978.

JOTA 1978

News from VK4ZNI, the National organizer, is that the Jamboree on the Air this year on 21st and 22nd October will be special as it is the 21st JOTA for Scouts and Guides. Make a note in your diary and contact your State Scout or Guide branch organizer.

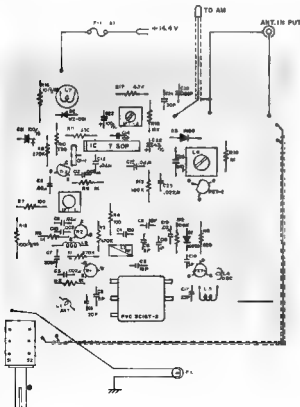


FIG. 2: (Above)
Hook-up for
other end of
Simple
Gunnplexer
Link
(free running)

Left:
Printed Circuit
Board with
Component
Placing



IC-280, the Remotable 2meter Mobile

This microprocessor controlled unit provides memory and synthesis requirements for the most critical FM operator. The PLL control is located in the detachable front section of the radio, providing memory and frequency control for the main section, which is remotely mountable with an optional three meter, twenty-four conductor cable. With the use of the microprocessor, the IC-280 can store three frequencies of your choice which are selected by a four position front panel switch. These frequencies are retained for as long as power is applied to the radio. Even when power is turned off at the front panel switch, the IC-280 retains its memories. When power is completely removed from the radio the ± 600 KHz splits are still maintained.

Power is selectable high and low, with the low power level preset by an internal control. This internal control allows the low power to be anything from zero up to and including the full power output.

The main section of the IC-280 uses the latest innovations in large signal handling FET front ends to provide excellent intermodulation character and good sensitivity at the same time. The IF filters are crystal monolithics in the first IF and ceramic in the second, providing narrow band capacity for today and tomorrow's crowded operating conditions. Modular PA construction with broad band tuning provides full rated power across the full 2 meter band (plus a little).

Bright, easy to read, large LED's and a new style meter grace the brushed aluminum "new look" front panel, and since the front of the IC-280 is a separate control head, it is now possible to mount this radio in those small cars and tight spaces and to put the main unit out of sight and out of mind.

**.state of art.
.technical
back-up.**

**.90 day
warranty.
.computerised.
.ICOM quality.**

399.00

IC-280 Specifications: ☐ Frequency Coverage 143.90—148.11 MHz ☐ Operating Conditions Temperature 10°C to 60°C (14°F to 140°F)
Duty Factor continuous ☐ Frequency Stability ± 1.5 KHz ☐ Modulation Type FM (F3) ☐ Antenna Impedance 50 ohms unbalanced ☐ Power Requirement DC 13.8V $\pm 15\%$ (negative ground) ☐ Current Drain Transmitting 2.5A Hi (10W), 1.2A Lo (1W) Receiving 0.630A at max audio output 0.450 at SQL ON with no signal ☐ Size 58mm(h) x 156mm(w) x 228mm(d) ☐ Weight approx. 2.2 Kg ☐ Power Output 10W Hi, 1W Lo ☐ Modulation System Phase ☐ Max. Frequency Deviation ± 5 KHz ☐ Spurious Output more than 60 dB below carrier ☐ Microphone Impedance 600 ohms dynamic or electret condenser type, such as the SM 2 ☐ Receiving System Double superhetrodyne ☐ Intermediate Frequency 1st 10.695 MHz, 2nd 455 KHz ☐ Sensitivity 1 μV at S+N/N at 30 dB or better Noise suppression sensitivity 20 dB, 0.6 μV or less ☐ Selectivity less than -75 KHz at -6 dB, less than ± 15 KHz at -60 dB ☐ Audio Output More than 1.5W ☐ Audio Output Impedance 8 ohms

Distributed by.

VICOM

GROUP OF COMPANIES

68 Eastern Road
SOUTH MELBOURNE VIC 3205
PH. (03) 699 6700 Telex AA30566



ICOM

Perth
Adelaide
Gold Coast
Canberra

446-3232
43-7981
32-2644
82-3581

Sydney
Brisbane
Hobart

681-3544
38-4480
43-6337



ic-280 remotable

The new REMOTABLE 2 METRE MOBILE from ICOM features microprocessor control with memory and synthesis control for the most critical FM operator. The PLL control is located in the detachable front section of the radio, providing memory and frequency control for the main section, which is remotely mountable with an optional 3 metre 24 conductor cable. Bright, easy to read, large LEDs and a new style meter, the IC280 gives frequency coverage 144-148 MHz in 25 KHz steps. Since the front of the IC280 is a separate control head, it is now possible to mount this radio in those small cars and light planes and to put the main unit out of sight and out of mind. Introductory price \$399 complete with mobile mounting bracket, mic and VICON 90 day warranty

NEW FROM DAIWA, QUALITY ANTENNA ROTATORS COMPLETE WITH 240VAC CONTROL BOX

Model DR7500S medium duty \$189.00
Model DR7600S heavy duty \$259.00



NEW rotators

KENWOOD

TS520S HF transceiver \$789.00
TS820S HF transceiver \$1,279.00
SP820 matching speaker with filters \$66.00
SM120 station monitor \$335.00
TL922 Linear Amplifier \$1,450.00
AT200 matching antenna tuner \$185.00
TV506 6m transverter \$236.00
502S 2m transverter \$189.00
MR3200 70cm fm portable transceiver \$229.00

Scalar M22T 1/4 wave whip \$7.00
Scalar M25T 5/8 wave whip \$17.50
Bases for above \$4.00
Magnetic Bases \$19.00
ARX-2 Ringo base antenna \$49.00

TRAP VERTICALS

V41R 40-10M, 5 2M high, no guys \$99.00
V51R 80-10M, 6 7M high, no guys \$165.00
14AVQ/WB Hy-Gain, 40-10M \$109.00
18AVT/WB Hy-Gain, 80-10M \$155.00

JAY BEAMS

5Y/2M Jaybeam, 7.8 dBd, length 1.6M, 5el \$39.00
8Y/2M Jaybeam, 9.5 dBd, length 2.8M, 8el \$47.00
10Y/2M Jaybeam, 11.4 dBd, length 4.4M, 10el \$79.00

70CM BEAMS (JAYBEAM)

88/70cm, 18.5 dBd gain, 98el, length 3.98M \$102.00
48/70cm, 15.7 dBd gain, 49el, length 1.83M \$79.00
PBW18/70, 18el, 14.9 dBd gain, length 2.8M \$71.00
D8/70cm, twin 9el, 70cm, 12.3 dBd, 1.1M \$62.00

ANTENNAS

professional back-up



ICOM

The Ultimate!



ICOM IC-211 2m transceiver

Features • 144 to 148 MHz coverage • Modes: SSB, CW, FM • LSI synthesizer PLL • 4-digit LED readout • Pulse-type noise blanker • VOX, anti-vox • Semi-break-in CW • Built-in SWR bridge • CW monitor and much more!

\$785.00 State-of-the-art

ICOM IC-701 HF transceiver

The NEW 701 features • Solid-state • 100W continuous on all bands, all modes • USB, LSB, CW, CW N, RTTY operation • Double balanced Schottky Diode Mixer used in both RX/TX • Dual-built-in digital VFO and much more!

\$1380.00 Plus DC power supply

IC701 HF digital solid-state transceiver \$1,380.00
IC701PS matching power supply / speaker \$279.00
IC202E 2m sb portable (new model) \$219.00
IC502 6m sb portable \$219.00
IC402 70cm sb portable, coming soon! \$169.00
IC225 2m fm mobile transceiver \$335.00
RM-3 Remote controller \$169.00
ICSM2 condenser-electric desk mic \$56.00
IC345 2m fm digital mobile transceiver \$575.00
IC211 digital 2m all mode \$785.00
IC280 2m fm digital mobile transceiver \$399.00

Buy now & beat the price rises!

KENWOOD

TS520S HF transceiver \$789.00
TS820S HF transceiver \$1,279.00
SP820 matching speaker with filters \$66.00
SM120 station monitor \$335.00
TL922 Linear Amplifier \$1,450.00
AT200 matching antenna tuner \$185.00
TV506 6m transverter \$236.00
502S 2m transverter \$189.00
MR3200 70cm fm portable transceiver \$229.00

Scalar M22T 1/4 wave whip \$7.00
Scalar M25T 5/8 wave whip \$17.50
Bases for above \$4.00
Magnetic Bases \$19.00
ARX-2 Ringo base antenna \$49.00

TRAP VERTICALS

V41R 40-10M, 5 2M high, no guys \$99.00
V51R 80-10M, 6 7M high, no guys \$165.00
14AVQ/WB Hy-Gain, 40-10M \$109.00
18AVT/WB Hy-Gain, 80-10M \$155.00

JAY BEAMS

5Y/2M Jaybeam, 7.8 dBd, length 1.6M, 5el \$39.00
8Y/2M Jaybeam, 9.5 dBd, length 2.8M, 8el \$47.00
10Y/2M Jaybeam, 11.4 dBd, length 4.4M, 10el \$79.00

70CM BEAMS (JAYBEAM)

88/70cm, 18.5 dBd gain, 98el, length 3.98M \$102.00
48/70cm, 15.7 dBd gain, 49el, length 1.83M \$79.00
PBW18/70, 18el, 14.9 dBd gain, length 2.8M \$71.00
D8/70cm, twin 9el, 70cm, 12.3 dBd, 1.1M \$62.00

ANTENNAS

morse keys

HK702 deluxe key with marble base \$39.00
HK708 economy key \$21.00
HK706 operator's key \$25.00
MK701 manipulator (side swiper) \$43.00
EK103Z electronic Keyer \$169.00
Palomar EK Keyer \$149.00

coax relays

ANTENNA CHANGE-OVER RELAYS

CX-2L 1.8 thru 170 MHz, 100w pep max \$48.00
CX-2H 1.8 thru 450 MHz, 200w pep max \$69.00

COAXIAL SWITCHES (DAIWA)

CS201 2 position, high pwr, up to 500 MHz \$25.00
CS401 4 position, high pwr, up to 500 MHz \$59.00

RF440, using phasing method, 6dB gain, ac/dc operation, compression indicator meter, quality construction \$155
RF550, uses crystal filter, 6dB gain, deluxe model, ac/dc operation, includes compression meter \$179
MC350, audio compressor, ac/dc with meter indicating compression level \$ 71

accessories

LOW PASS FILTERS

FD30M 32 MHz Fc, 1 Kw max, 3 stages \$35.00
FD30LS 32 MHz Fc, 200w max, 3 stages \$20.00

NOISE BRIDGES

Omega TE7-01 up to 100 MHz \$49.00
Palomar up to 100 MHz \$79.00

HALTAMS

AS-BL for beams \$31.50
BL50A 50 ohm 4 Kw model for dipoles \$26.00
BL70A 70 ohm 4 Kw model for dipoles \$27.00

VALVES

6146B for Uiden, Kenwood, Yaesu \$13.00
6KD6 for early Yaesu linears \$13.00
6JS6C for FT101 series \$13.50
572B for Yaesu linears \$59.00



speech processors
Dealer enquiries invited

Head Office and Mail Orders

Direction Russell J Kelly
Peter D Williams

bankcard



TRADE-INS ACCEPTED

vicom Ph (03) 699.6700
68 Eastern Road
Sth Melbourne Vic. 3205

TLX 30566

Perth
Adelaide
Gold Coast
Canberra

446.3232
43.7981
32.2644
82.3581

Sydney
Brisbane
Hobart

681.3544
38.4480
43.6337



AMATEUR RADIO CENTER

5/12 KELROY PLACE, ASQUITH, N.S.W., 2078

TELEPHONE: (02) 652 1492 and (02) 98 6249



Q: THINK YOU WERE SUCCESSFUL IN THE LAST EXAM?
Q: HAVING PROBLEMS TRANSLATING THEORY INTO PRACTICE?
B: CONFUSED BY THE CLAIMS OF MANUFACTURERS?

THEN COME AND TALK TO US!

We have a wide range of radio equipment suitable for your operating requirements. We have the know-how to assist you in setting up a new station or updating your existing equipment whether your QTH is A CITY FLAT — A SUB-URBAN HOME — ACRES OF COUNTRY SPACE. Whatever your lifestyle — you can enjoy ham radio.

SPECIAL — POWER SUPPLIES

138/3	3A	13.8V	Reg. Supply	P.O.A.
138/5	5A	13.8V	Reg. Supply	\$55.00
138/10	10A	13.8V	Reg. Supply	P.O.A.
138/20	20A	13.8V	Reg. Supply	P.O.A.

These power supplies are ruggedly designed for Australian conditions. All ratings are continuous. Filtering is through computer grade capacitors.

WE ALSO MANUFACTURE TO YOUR SPECIFICATIONS.

GILCO AMATEUR RADIO CENTER

5/12 KELROY PLACE, ASQUITH, N.S.W. 2078

Props - JACK GILLHAM VK2DG, HORST LEYKAM VK2BHF.

SOCIAL RESPONSIBILITY: We reserve the right to refuse sale of transmitting equipment to unqualified persons.

YAESU



TRIO DM-800 DIP METER

FEATURES

1. Free range 700 kHz to 250 MHz in seven bands.
2. All seven d.s. meter coils can be encased in the main body so that you can easily carry and safely store them.
3. Your DM-800 is convenient for indoor and outdoor measurements because of all solid-state circuit and built-in battery (300PF).
4. A HC-25U socket besides the FT-243 socket enables you to use your DM-800 as a crystal checker and marker generator.
5. As amplitude modulation is convenient in signal receivers when using your DM-800 as a signal generator. Also, the amplitude modulation is helpful in precisely calibrating the dial scale even for the receiver having no BFO when it is used as the marker generator.
6. The dial scale and dip meter coils are set in five colors so that you can easily identify any band.
7. As an absorption wavemeter, your DM-800 is useful to tune transmitters and to measure the field strength.
8. An earphone plugged allows you to monitor transmitters.

PRICE: \$148.00

Amateur Net (incl. Sales Tax and Postage)

WRITE FOR SPECIFICATION BROCHURE

WILLIAM WILLIS & Co. Pty. Ltd.

MANUFACTURERS AND IMPORTERS

77 CANTERBURY ROAD, CANTERBURY, VIC. 3218

PHONE 836 0707

HATFIELD CRYSTALS LTD.

PROFESSIONAL CRYSTALS for amateur use



\$A5.50 each
to Licensed Amateurs.

Inclusive packing and
airmail postage.

P.O. Box 561, Napier, N.Z.

TELEPHONE: 435-939

TELEX: NZ 3685

Telegrams and Cables: SIGJEN

Minimum order charge —
A\$12.60.

Low price on cash with
order basis only.*

Professional quality
assured.

Civil Aviation Division
Ministry of Transport
approved.

*Regrettably we are unable to accept
cheques made out in A\$ Money order
or similar in N.Z. currency can easily
be obtained.

TIMED MUTING

John Ingham VK5KG

The advent of 2 metre repeaters brought better quality communications between mobile stations, and the use of repeater channels as calling frequencies. Unfortunately these two do not mix very well.

WICEN provides a good example of this. On one hand it would be desirable to contact WICEN members by radio at any time. But on the other hand it is clearly impractical to leave a 2 metre FM receiver running for 24 hours a day in any ham shack or home. To do so would severely hamper operations on other bands. Not to mention possible divorce suit! What is needed, then, is a device which when attached to a receiver, will allow an initial call of a QSO to be heard, but which will mute the rest of the QSO. The circuit to be described is such a device based on several timers. In addition, short transmissions of a second or so duration (such as caused by "button pushers") are ignored.

In designing the device I decided to use CMOS ICs for simplicity and to avoid having to include a voltage regulator as would be the case if TTL were used. The particular 2 metre rig I use is an ICOM IC22S, but the concept is adaptable to any rig, particularly the more modern transceivers which feature a lamp which is lit upon receipt of a signal. More on possible adaptations later.

DESCRIPTION OF CIRCUIT

The indication of a signal being received is provided by zero volts on the "cold" side of the "signal received" lamp of the IC22S. The presence of 12 volts indicates absence of a signal. This line is fed to the outboard time-mute unit via the multi-pin socket on the rear apron of the IC22S, whereupon it is integrated by an RC network. R1 is adjusted so that a signal must be present for at least a second before being accepted (This is so as to ignore "button pushers") The Schmitt-trigger squares up the leading and trailing edges of the logic signal so as to make it more acceptable to the following multivibrators which require a sharp transition for correct operation.

In a nutshell, the operation of the device from here on can be summed up as follows left to itself monostable "A" (which triggers on positive going transitions) would allow the first 5 or 6 seconds of each over to be heard, however monostable "B" (which triggers on negative going transitions) prevents "A" from working

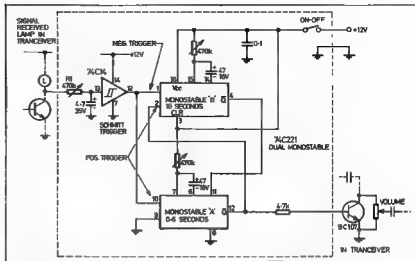


FIG. 1. Timed Mute Circuit.




FIG. 2. Suggested Interface Circuit.

within 10 seconds of loss of a signal. Even at the end of those 10 seconds if a signal is present "A" will not retrigger because it requires a transition in order to work. Further, in the event of temporary loss of signal due to say QSB, monostable "B" is prevented from cutting short "A's" time out by the use of an inhibit from "A". This also retriggers "B" in the event that the duration of reception of the signal is less than the run time of "A".

The output of monostable "A" has the reverse of the polarity which might at first be expected, +12 volts means mute, zero volts means unmute. This is done deliberately so that by the simple expedient of switching off the power to the device, or by unplugging it, the transceiver continues to function as was originally intended.

The means of applying muting to the transceiver is, in the case of the IC22S, simplicity itself. ICOM have conveniently used decoupling capacitors on both the input and output of the volume control. Thus without having to worry about upsetting DC levels an NPN transistor such as a 9C107 can be connected across the volume control (emitter to ground) with the base connected via a current limiting resistor to the output of monostable "A". When the device is disconnected, switched off, or when monostable "A" is running, there is no forward bias on the transistor. It therefore is OFF and has no effect on the normal operation of the transceiver. However when muting is required the transistor is forward biased and in effect shorts out the audio at the volume control.

It is obviously impractical to give details of connections for every make of transceiver currently in use. However, several generalizations can be made. Any transceiver with a lamp to indicate receipt of signal can be used. If the polarity or sense of the logic so obtained is the reverse of that provided by the IC22S as described above, one of the spare Schmitt-

triggers can be used to invert it. Those transceivers without capacitive coupling either side of the volume control could quite likely be modified accordingly. Where this is not possible the following might be tried. Those amateurs who do not wish to modify their rigs may also wish to try the following which, although it has not been tested, should work.

The transceiver audio output is connected to an external speaker via the contacts of a muting relay which is driven by monostable "A". A sample of this loud-speaker signal is rectified and used to trigger the time-mute device. (This signal, after rectification and integration-filtering, needs inverting and amplification before being presented to the Schmitt-trigger.)

Although this time-mute device has only been in existence a short while, the times given above are a result of experience and should be adhered to for the sake of uniformity. Unlike tone-encoded calling systems, this device allows amateurs without special equipment to call equipped stations. It also allows the receipt of CQ, Mayday and other type of general calls.

Reproduced from WIA SA Journal, April 1978.

A 144 MHz LINEAR AMPLIFIER

Greg Taylor VK7ZYT
94 Berriedale Road, Berriedale, 7011

A 144 MHz LINEAR AMPLIFIER

There are several fully solid state, low power SSB transceivers available commercially now and these have made a big impact on the activity on the VHF bands.

However, in most cases, the low power is a limitation to the serious DXer. This also applies to many home brew exciters and transmitters with only 1-3W PEP output.

With this in mind an amplifier was designed for use with SSB drive from 1W to 5W PEP and 10W to 12W PEP depending on the configuration constructed.

The variations to the amplifier are as follows.—

- (1) Driver stage only using a 2N5590 will deliver 10W with less than 1.5W PEP of drive.
- (2) Driver stage only using a 2N5591 will deliver 20-22W with 4W of drive.
- (3) Driver stage using 2N5591 and two 2N5591 in the output stage. This combination will deliver 40 to 45W with less than 2W of drive.
- (4) If the drive available is only 1W, a 2N5590 can be used to drive two 2N5591s to about 40W output.
- (5) The output stage only can be built using two 2N5591 and will deliver 60W with 10W to 12.5W of drive.

It is only necessary to construct the relevant section of the PCB.

A few years ago, I used 2N5591s in a broadband HF linear with very pleasing results. One aspect about using these transistors in linear service that became apparent is the lower output power obtainable with the output available in class C.

Although 30W or more can be obtained in class C service, only 20 to 25W can be obtained from a class AM linear when using a 2N5591, if intermodulation distortion products are to be kept low.

The use of a 2N5591 as a driver in this amplifier may seem extravagant, but this is necessary to keep intermodulation distortion to a minimum by allowing the driver to loaf along. The output stage can then be driven further into the gain compression region before the combined distortion of the two stages becomes excessive.

If the drive available is only 1W PEP and less than 40W PEP output is satisfactory, the 2N5590 is quite suitable as a driver.

POWER SUPPLY AND BIAS

Two important aspects that must be considered when designing and building transistor linear amplifiers are bias and supply regulation.

The power supply should be regulated to within 2 per cent for load variations from

1A to 10A. This includes the voltage drop due to leads, fuses, relay contacts and terminals.

To avoid these problem areas, I suggest:

- (1) very short and heavy leads between the power supply and amplifier.
- (2) a short circuit protected power supply instead of line fuses; and
- (3) instead of switching the supply rail directly, switch the voltage regulator at a low current point, i.e., the base of the main pass transistor or driver.

Bias

A very important subject.

There are two methods of biasing the RF power transistors.

- (a) forward biased diodes;
- (b) transistor regulated sources.

The transistor bias supply is preferred because of its lower output impedance and a wider degree of control over its operating parameters, however it is more complicated than the diode method and was considered unnecessary for an amplifier at this power level, where forward biased diodes can provide good results.

The diodes are in contact with the transistor package so that the bias voltage will approximately track the transistors' base-emitter voltage variation with temperature. The risk of thermal runaway in the transistors is thus minimised when the transistor junction temperature rises when dissipating heat with drive applied — linear amplifiers are typically 50 per cent efficient.

The second function of the bias network is to maintain the DC bias and hence the conduction angle of the base current — approximately 180° over the drive range.

If the bias network is poorly designed and has a high output resistance the DC bias voltage will be reduced by the reverse current flow in the network due to the rectification of the drive signal by the base/emitter junction. This results in a conduction angle of less than 180° and causes distortion to increase. If taken to extremes it is possible for a supposedly AB amplifier to shift into class C at or near full drive, if not sooner.

With simple bias networks such as the diode type a low impedance can only be achieved with high bias network current. In this amplifier each network passes approximately 200 mA.

Separate bias supplies are used for each output transistor to alleviate individual selection of the transistors for similar base turn-on characteristics. It is advisable to select transistors with the same batch number.

At this stage I would like to offer a simple test to those who already have

transistor linear amplifiers. Measure the DC voltage on the base of the output transistor through a RFC or low value resistor (e.g. 1k). Apply drive and increase to full output. If the DC voltage (typically 0.5-0.6V) falls appreciably or reverses, the bias network is inadequate and should be revised.

Some variation is unavoidable with simple networks and must be accepted.

CONSTRUCTION NOTES

The amplifier is built on a double-sided fibreglass board to aid stability. The only active track on the underside of the board is used to link the supply rail between the two output transistors.

The PCB should be mounted approximately 2 mm away from the heat sink so that the transistor leads rest flat on the copper without bending. Before mounting the transistors the leads should be cut to 3/8 inch length, then the outer 1/8 inch bent up vertically, this enables easier installation and removal.

The 1000 pF chip capacitors are soldered to the PCB by first tinning the copper track then lying the chip capacitor on the tinned area. Apply the soldering iron to the top side of the capacitor until the solder melts underneath.

The links between both sides of the PCB are short lengths of No. 16 copper wire soldered to the copper tracks.

The three bias diodes are placed across the emitter leads of the transistors with some silicon grease or heat conductive glue between them and the transistor package.

All capacitors should be soldered to the PCB with leads as short as possible and take care not to overheat them when soldering.

Transistors are more prone to thermal instability and failure when operated in a linear mode than in class C. Therefore the heatsink should have a large effective area and should have good ventilation.

TRANSMITTER TYPE

The 2N5590 and 2N5591 transistors have been used in this amplifier as they are readily available and inexpensive. Also they have been proven to give good performance as linear amplifiers for amateur use.

Although it has not been possible to






FIG. 1. Harmonic Filter.

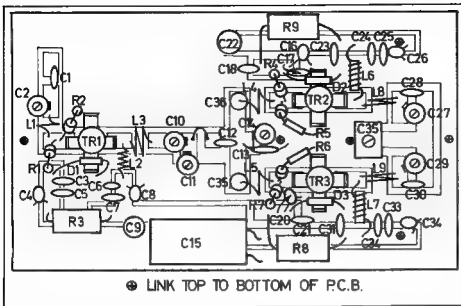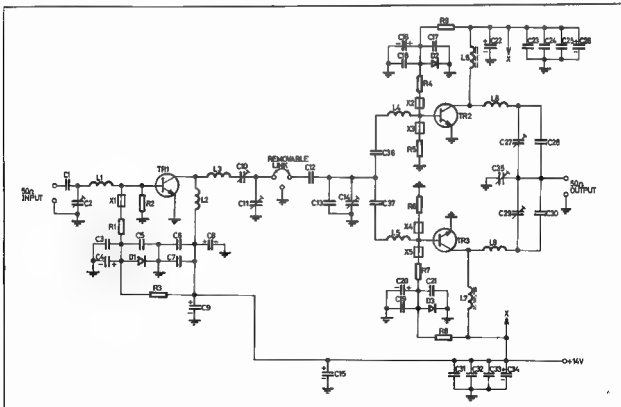

LEFT
FIGURE 2.
PCB Component
Layout
(actual size).

RIGHT
FIGURE 4.
144 MHz Linear
Amplifier
Circuit.



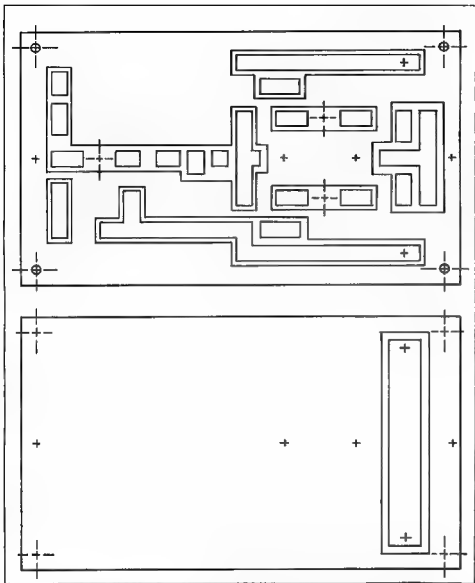


FIGURE 3
Double-Sided
Printed Circuit Board
Layout
(actual size).

measure the intermodulation distortion of this amplifier, other amplifiers have exhibited I.M.D. of -25 dB at similar power levels using 2N5591s.

Other transistors that might be suitable are,—

● instead of the 2N5590 — B12-12, BLY88A, 2N6081.

● instead of the 2N5591 — B25-12, BLY89A, 2N6083.

TUNE-UP TO ADJUST BIAS

- (1) Terminate the amplifier input and output with 50 ohm
- (2) Disconnect the supply end of R3, R8 and R9

- (3) Apply 14.5V DC to the amplifier via a 250 mA meter.
- (4) Connect R3 to the 14.5V supply before the above current meter, i.e. do not allow the current through R3 to indicate on the current meter.
- (5) Adjust the value of R3 to give 100 mA to 120 mA of IC. Disconnect the supply from R3.
- (6) Repeat steps (4) and (5) with R8 and then R9. Each time leave the resistor disconnected from the supply after selecting the correct value. The IC of TR2 and TR3 should be set at equal values between 100 and 120 mA.
- (7) Disconnect the supply and solder the

three bias resistors in place. Keep them away from the PCB and other components as they become very hot.

TUNING THE DRIVER STAGE

- (1) Connect the output of the driver to a power meter. If possible, keep a load on the output stage. This stage is quite stable without a load, but it pays to be careful.
- (2) Connect the output of the exciter to the driver input via an SWR bridge or directional power meter.
- (3) Apply power to the amplifier.
- (4) Apply CW drive to the driver at 0.5W to 1W. Start with C2, C10 and C11 at half mesh

EQUIPMENT REVIEW—

THE YAESU FT-901DM HF TRANSCEIVER

Ron Fisher VK3OM


When Mr. Fred Ball, of Ball Electronics Services rang and suggested that I might like to try out the new Yaesu FT-901DM transceiver, I was delighted to do so. The 901 has been the subject of quite extensive advertising and it has been billed as a COMPETITION-GRADE HF Transceiver. Whether this refers to competition with other transceiver manufacturers or competition in the form of amateur contests is not quite clear. However, it seems that it could qualify in both areas. Well, just what does the FT-901DM do that other HF transceivers don't do? Perhaps this depends on your particular requirements, but it is clear that the Yaesu design team must have spent a long time and did a lot of head scratching to think up all the features that have gone into this transceiver. It would in fact be very hard to think of any other feature that could have been added.

Let's look at the list. Digital frequency readout with one hundred hertz resolution, Yaesu's new memory frequency control, Curtis electronic keyer, rejection tuning, variable IF bandwidth tuning, audio peak frequency tuning, RF processing, a squelch system on the transmit audio to eliminate background noise between words, which Yaesu term their AMGC system. In addition to all these there is provision to transmit and receive FM presumably for use on VHF bands with external transverters. A squelch control is included for FM receive.

For the first time as far as I can remember, Yaesu have decided to use 8146s in the transmitter output stage. They also employ negative RF feedback over the final stages to reduce distortion products. All of the usual Yaesu features are of course still there. Ten to one-sixty coverage, selectable AGC, VOX, noise blanker, AC or 12 volt DC operation.

Let's now look a little more closely at the overall design of the FT-901. It bears a similarity with several earlier Yaesu transceivers. Perhaps at first glance it could be called an updated FT-101, and there is no doubt that the 101 must have influenced the designers to quite a large extent. When we look inside, though, there is a resemblance to the FT-301 series.

While we normally don't make mention of competing equipment in these reviews, I am sure that the Yaesu Co. won't mind me saying that the overall appearance is very reminiscent of the Kenwood TS-820. Perhaps the undoubted success of that transceiver reflects in the 901. Whatever, the FT-901DM is a very attractive rig. The new style dial is now fully illuminated with two rotating scales, the larger of which is the kilohertz indicator, and the smaller or inner the 100 kilohertz indicator. The rear illumination is a soft blue which is very easy on the eyes over a long

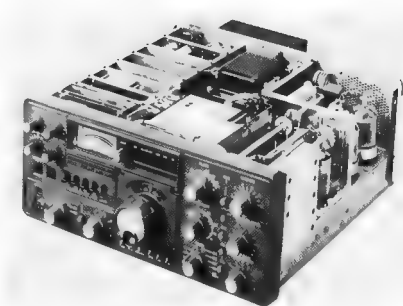

period of operation. "S" meter illumination is also excellent, and is the first transceiver rear lit type that Yaesu have used.

A look at the circuit reveals that a great deal of effort has been put into producing a cleaner received signal. A single conversion scheme has now replaced the old double conversion of the FT-101 and the IF used is 8.9675 kHz. The receiver front end uses the usual 3SK40M dual gate MOSFET as an RF stage feeding a source follower stage with two FETs in parallel. The first mixer is balanced with two FETs. In fact a great deal of use has been made of balanced stages throughout the circuitry. The IF signal receives some amplification through two parallel connected FETs, and is then fed through a ± 10 kHz monolithic filter before going into the switchable filter and the noise blanker. This assures low cross modulation when the blanker is in use. Three filters can be specified in the 901 with the 2.4 kHz SSB unit supplied as standard. A 600 Hz filter for CW and a 6 kHz filter for AM are both optional extras. Output to the FM IF strip is taken out before the switchable filters and taken off to a special FM board which contains both the transmit and receive facilities for that mode. The bandwidth control has some very interesting circuitry behind it. The IF signal at 8.9675 kHz is converted to a frequency of 10.76 MHz, where it passes through another filter. However, as the heterodyning crystal oscillator frequency for this conversion is controlled by the bandwidth

setting, the actual bandpass can be varied in relation to the normal first SSB filter.

It should be noted that in both the AM and FM modes the bandwidth control operates in a similar way to the FT-301 transceiver set-up. The series resonant frequency of a crystal at the IF frequency is tuned across the bandpass by means of a varactor diode. In the review of the FT-301D we commented on the simplicity of this arrangement and also its effectiveness.

The receive audio section is worth looking at. It incorporates the APF circuitry which used an MC3403P op. amp. as a selective amplifier in a very effective and yet simple circuit. The peak frequency is variable between 400 and 900 Hz.

The digital frequency display on the FT-901DM is controlled by the VFO frequency only and hence requires to be recalibrated when bands or modes are changed. It seems a pity that Yaesu didn't go the whole way and provide mixing for all internal oscillators to give accurate readout. This does not infer that accurate readout cannot be obtained, it can, but the display must be calibrated against the transceiver calibrator to be sure. While on the subject of calibration, it is high time that Yaesu devised a means of changing modes without changing frequency and hence the need to recalibrate. With a transceiver of this complexity there is just no excuse for the lack of this feature.

At long last Japanese designers have discovered that RF inverse feedback produces cleaner signals — a very necessary

thing on today's crowded bands. The FT-901DM is in fact the second Japanese transceiver to incorporate RF feedback but when we consider that the American Collins Co. introduced this back in the late 1950s we wonder why it took so long. Yaesu claim 6 dB of feedback and state their 3rd order distortion products at better than 31 dB below rated output. As this would bring the distortion up to about -25 dB without the feedback, one wonders how the FT-101 and other transceivers produced their "better than -30 dB" specs.

Be that as it may, the 901 does put out a very clean signal. The difference under local strong signal conditions is very noticeable.

The 901 uses the excellent permeability tuning system well perfected in the 101 d 301 series. Combined with the other features mentioned earlier, this helps yet

in to contribute to a clean signal on both transmit and receive. The new Yaesu memory is an interesting albeit complicated system. It is a complete synthesizer locked to the normal transceiver VFO. When the memory button is pushed, the VFO counter is latched and the VCO is locked on to that frequency. When recall is required, the output from the VCO is fed into the system in place of the normal VFO.

THE FT-901DM ON THE AIR

Basic operation of the 901 is soon mastered, however it takes time to become acquainted with all the accessories. The new tuning dial is smooth and a pleasure to use. The front finger hole on the tuning knob makes it easy to spin from one end of the range to the other. From personal preference I still like the old protruding spinner that we got used to on most of the older design Yaesu gear, however the new type does look smoother. With both the power and heater switches on, the transmitter can be put straight into the tune mode by using Yaesu's new ten second automatic tune up device. Just push the tune button, the red LED indicator comes up, the transmitter goes into TUNE and you have ten seconds to complete the operation. This feature might help the final tubes live a bit longer when used by some of those perpetual "Tuner-uppers" that we hear so often on the bands. Received audio quality sounded rather restricted and no amount of playing with the bandwidth control seemed to put this right. In fairness, though, it must be said that another member of our technical staff found the audio response to his liking, particularly when using the headphone output. The operation of the bandwidth control was not quite as expected. Having been brought up on the old style communications receivers, I expected the selectivity to increase in a symmetrical manner. This does not happen. Instead one can push the response either higher or lower and so achieve either a lopping off of high or low frequency audio but not

both. It is now clear to see why Yaesu offer a CW filter as an optional extra.

The bandwidth control is useful in eliminating interference to some extent, useful for balancing up poor transmitted quality from other stations, but the reject control is by far the more useful of the two. AGC action is smooth in either the fast or slow position — attack time is fast with no hint of any distortion on strong signals.

On the transmit side, audio quality reports were excellent and the RF processor proved to be effective although a little hard to adjust first off. Amateurs who don't possess a monitor scope should take their time and get plenty of reports from locals. Better perhaps, borrow a scope.

Back to receive, the clarifier operates on either transmit or receive or both. Quite a handy feature if you want to shift onto the received frequency when offset.

Not being an ardent CW man I can only say that the built-in Keyer worked very smoothly. The only external attachment needed is a paddle. The keying speed can be adjusted by a front panel control. With the adjustable audio filter, rejection filter and keyer, the FT-901DM makes a superb CW rig. Here at last is a transceiver that has given some thought to the keen CW operator.

The AMGC or automatic microphone gain control, could be useful in reducing unwanted household noises particularly when the processor is in use. It works by providing a threshold level on the microphone amplifier. Input via the microphone below normal close talking conditions just does not come through. Handy if you have noisy children.

The memory system proved a useful feature. While not quite as handy as an external VFO, it does enable split frequency operation. It is possible to transmit on a fixed channel and the receive elsewhere. Very useful if a DXpedition is listening up to 10 kHz or you like to work the "Wrs" on 40 metres. As we didn't have a two metre transverter available, we were not able to fully check out the FM mode. It does appear to be an economical way to get on to two metres with all modes.

One point mentioned in the FT-901 advertising that needs comment is Yaesu's unique slug tuning system provides for the possibility of expanded amateur bands at WARC 79. Perhaps so, but the band switch on the 901 does not have an auxiliary position. So where does the new band fit in?

INSTRUCTION BOOK

The FT-901DM instruction book is in the usual excellent Yaesu manner. Clear operating instructions explain every control in full detail. The circuit description section will enable the new owner to fully understand just how his set operates. A full schematic and block diagram is included, but no circuit board layouts are provided. All points that might need adjustment are clearly indicated.

CONCLUSIONS

While we could not say that the FT-901DM is a "State of the art design", it does offer a startling array of facilities that would be hard to duplicate in any other available transceiver. While the total package is fairly expensive, the 901 is available, less some of these features, at of course a lower price. For the CW man it offers perhaps the best performance package available anywhere and for the SSB man a smooth operating set with just about every convenience he will ever need. Our FT-901 was loaned by Bail Electronics Services, to whom all enquiries on price and delivery should be directed. ■

A SECRETARY'S CONSOLATION

If a secretary writes a letter, it is too long.
If he sends a postcard, it's too short.
If he issues a bulletin, he's a spendthrift.
If he attends a committee meeting, he's butting in.
If he stays away, he's a shirker.
If he offers a suggestion, he's a "know all".
If he says nothing, he is useless.
If the attendance at the meeting is slack, he should have called the members up.
If he calls them up, he's a pest.
If he asks a member for his subscription, he is insulting.
If he doesn't, he is lazy.
If the meeting is a big success, the committee gets the praise.
If it is a failure, the secretary is to blame.
If he asks for advice, he is incompetent.
If he does not, he is swollen headed.
Ashes to ashes, dust to dust,
If the others won't do it, the secretary must.

Anon.—Submitted by Ron Jardine VK3PR. ■

QSP

EDITORIAL NOTE

"It is operating and technical investigation, not regulatory hearing, which are the essence of amateur radio. Were it not for the sheer enjoyment we amateurs derive from the former, we wouldn't concern ourselves with the latter." From QST editorial, Feb '78.

QST TUNE

From Feb '78 QST it is learned that US marine mobiles must always observe US phone band limitations even when they are outside Region 2. Also that any amateur or club in Quebec province may substitute the prefix VZ for VE to 12101878 inclusive to celebrate Radio Canada TV's 25th anniversary.

LONG DELAYED ECHOES

LDEs have been recorded over a period of many years on HF but nobody has come up with any acceptable answers. A recent impetus was the observation of LDEs by G29CR during EME tests on 7.7.1974 at a time when many solar flares were observed. The frequency of observations however was 1295 MHz and the echoes some two seconds after the return EME signal. This alone has triggered much speculation as set out in two articles in Feb '78 QST. ■

SOME MODIFICATIONS TO THE VK2BGZ FT101 DIGITAL READOUT

Noel Lavelle VK3ABH
4 Wembley Court, Forest Hill 3131

As it appeared in AR for January 1978, Keith Gooley's Digital Reader is fine, but, as is usual, when I build something designed by someone else, I modified it a little.

I don't question Keith's statement that no birdies are present when using his filter, but looking at the input (not connected to the FT101) a considerable amount of pulse noise was present. If the input impedance of the readout was to be reduced sufficiently to eradicate these pulses it would present a quite considerable load to the VFO line.

With the changes shown to the filter (Fig. 1), the input impedance is high and even with the readout input open circuit no significant pulse noise is present. With the input terminated in about 3000 pF, like the VFO line in the FT101, any pulse noise present is further reduced by a ratio of about 140:1 and no pulse noise is detectable. The high input impedance imposes no loading on the VFO line.

I prefer it to use rotary switches when I can avoid them, and felt that the megahertz readout didn't justify setting another rotary switch when changing bands. Keith's method of switching ensures that you will be presented with the correct frequency for the usual mode of operation on speech on any band, but accurate frequency readings are limited to the pre-selected mode. Use of a different mode on any band would require some mental effort to arrive at the correct frequency. CW readings would, of course, be inaccurate on all bands for which the pre-selected mode was other than USB.

In my case (Fig. 2) USB, LSB and AM are available on any band at the flick of a toggle switch, and the band start of 0 or 500 kHz is available at the flick of another toggle switch. The price you pay is lack of megahertz display and the necessity of ensuring that both readout

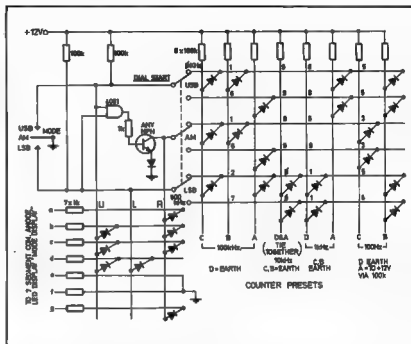


FIGURE 2: Encoding matrix.

and transceiver are in the same mode to obtain accurate frequency readings.

I couldn't find a miniature three position toggle switch which made connection in the centre position (all seemed to be centre—off), so I used a logical NAND gate to provide the required ground for the centre (AM) position. The NAND gate is made up of a logical AND gate driving a saturated transistor as the current is in excess of that which a Cmos NAND gate can sink safely.

The binary encoding matrix for pre-setting the counters shown in Fig. 1 for an FT101B.

The displayed frequency makes it obvious whether one has selected the correct band start (0 or 500 kHz). But I decided that it was worthwhile to precede the frequency display with "U", "L" or "A" as a reminder of the mode for which the display was an accurate presentation (i.e. an upper sideband signal on 14198.5 kHz would be displayed as "U198.5").




FIGURE 1: Input Filter.

THE HAM OPERATOR

My Dad operates a ham radio,
He is a very interesting person,
He has fun with it, talks to it, eats with it
and sleeps with it.

I don't know what else but I have my suspicions,
Ham Operators usually treat their rig like
a trainer breaking in a colt or training
hunting birds.

He spends most of his time with it.

Yes, we see him sometimes.

Yes, we see him go past the table to the back door.

I suppose it's all right, he is a technician, but what Mum gets upset about is that I'm interested in that stuff too, but my Dad's a good Dad and I love him.

Chris

(14-year-old daughter of Wilf VK4ZNZ).

—From S.A. Journal, June 1978.

AMATEUR RADIO REPORTS ON COMMERCIAL RADIO STATION

Sam Voron VK2BVS
2 Griffith Ave., East Roseville, N.S.W. 2369

**"YOU'RE TUNED TO 2GB IN SYDNEY 570 kHz
— NOW FOR TONIGHT'S REPORT FOR AMATEUR RADIO ENTHUSIASTS"**

**A guide to help you get some
amateur radio public relations going
within your community via your
local disco radio station.**

A problem with many PR exercises, whether they be an article in the press, an outdoor demo of amateur gear or what have you — is that they lack regularity and thus some form of continuity which is important if the aim of one's PR is either to —

(a) Let the general public find out what amateur radio is and what makes it tick, or

(b) If one hopes to encourage within individuals (newcomers) a growing interest towards one day becoming radio amateurs.

Here are details of a project which has been running in Sydney for some weeks now which could help you in organising amateur PR via your local radio station.

1. Your approach will initially make or break your project — So let's look at the philosophy involved.

(A) **What is in it for amateur radio?** The idea of broadcasting regular amateur propagation reports is of direct interest to amateurs who don't want to miss interesting activities which may be occurring on certain bands at certain times. At the same time this information is excellent amateur PR since the general public are getting to know more and more of what amateurs are doing.

(B) **What is in it for the radio station?** By providing nightly on-air announcements the station can expect to attract a whole group of new listeners who will identify that station as being their station. The station can expect that these new listeners will acquire an identification with and an interest in its programmes as a consequence of this mutual involvement.

2. Taylor your project to the strategy the station wishes to employ and ensure that not only the aims of your project but also the aims of the station are compatible with the way you design your project.

In the case of the 2GB project the strategy used was to design a programme format which would not cause the station to offend or lose any of its existing listeners, and at the same time construct a framework whereby new listeners could be gained. Both aims were achieved by —

(a) Keeping all radio reports to items which were highly descriptive, interesting and entertaining in character.



Disc jockey Chris Curtis goes into action after the weather report over 2GB, giving his listeners a taste of Amateur Radio as he describes the state of the bands 3 minutes past the hour starting from midnight.

(b) Avoiding technical jargon.

(c) Employing the period from midnight till 5 a.m. which the station could make available for such a new project (with possibility of other times available if the project went well and the station's time commitments allowed).

DESIGNING YOUR PROGRAMME FORMAT

The 2GB project involves —

(1) Hourly announcements at 3 minutes past the hour (just after the weather report), commencing from midnight.

(2) The format used was "Today's radio report for amateur radio enthusiasts comes from John VK2XYZ of Lindfield and he reports that . . . and we will have another amateur radio report immediately after the news at . . ."

ORGANISING A ROSTER

I spent a few nights on the air calling "CQ anyone able to join a roster system for compiling propagation reports between midnight till 5 a.m."

(1) Decided to concentrate our effort in the midnight till 2 a.m. segment to start off with and later expand to the 5 a.m. time as volunteers increased.

(2) You want a person to be in charge of organising, maintaining the roster and briefing volunteers' reports to the ins and outs of what's involved including a run-down of the aims of the project from both station and amateur points of view. Briefings on formulating reports into an interesting segment is also important.

(3) Amateurs or short wave listeners were rostered for certain days in the week and advised to phone in their report to the station half an hour before the item was due for broadcast. The organiser, the station manager and those involved in the project had a roster list copy to keep track of those authorised to feed reports into the station.

(4) Any enquiries received at the station regarding reporting or enquiries about amateur radio were directed to phone the organiser of the amateur roster between 8 and 8.30 in the evening.

(5) Contact is maintained with those on the roster by the organiser phoning them the weeks Oscar passes, as well as discussions about new approaches to try. These nets are on 28.5 MHz on Fridays and Saturdays and 1825 MHz on Sundays. Those on the roster are advised of feed-

back from the station as well as from the public

Some of the on air announcements within the basic format which identifies the amateur's call sign, name and location have included — "American amateurs are coming in well this morning on the 14 MHz band and to receive the amateur satellite signals turn your aeriels skywards for the 7.46 pass."

"Before going to work, Australian country amateurs on the 3.5 MHz amateur band are exchanging news and technical gossip, the amateur satellite will orbit at 5 past 6 this evening, so point your antennas to the sky, that's for the amateur satellite orbiting at 5 past 6 this evening."

"The 28 and 21 MHz bands are dead, but 14 MHz is going flat chat with high powered amateurs in the USA and Canada making long distance contacts."

"Conditions on 14 and 21 MHz are very poor and 3.5 MHz is good for communications around Australia, the amateur satellite, by the way, will be available for use at 5.57 this afternoon."

"The conditions which were good for the USA on 14 MHz have now deteriorated and are getting worse and worse."

"7 MHz has been open all morning and the South Pacific stations are coming through loud and clear, and Oscar 8, which is the amateur satellite, will pass over Australia at 9.30 tonight, so make sure that your antennas are pointed up to the sky."

"There are local contacts on 28 MHz and similarly on 3.5 MHz with good signals from New Zealand, the 14 MHz band is holding up well with amateurs from the United States being received well, the most interesting band is 7 MHz where strong signals can be heard from the Pacific area, Asia and South America."

"Conditions on the 15 metre band are unusual this evening in that strong signals are coming in from the States."

Those involved in the roster over the first few weeks of the project who have helped to make it a success are: Mondays and Thursdays, Alex VK2BYO, of Turramurra; Tuesdays and Fridays, Horst VK2BHF, of Dee Why; Wednesdays and Saturdays, Don VK2BXM, of Roseville; Sundays, Simeon VK2NIC, of Killara.

Take a listen — As the project is on a trial basis, its continuance depends on feedback received from listeners. If you hear it and you like it — then send a letter to the Station Manager, Radio Station 2GB, Sydney, NSW. If you'd like to join the roster then phone Sam VK2BVS on 407 1066.

The final point, then, in any project whether you are involved in an article in a paper, a demonstration in a park or at a radio station — provide feedback to those you are involved with if you hope to maintain or expand it.

PORTABLE ARMY WIRELESS SETS OF WORLD WAR II

Compiled by R. Champness VK3UG


1. The Wireless Set No. 208 is a 0.6 watt input CW only battery powered HF transceiver. The set operates in the 2.5 to 3.5 MHz band in the Mark II version. The transmitter and receiver are both VFO controlled. The receiver can be used for telephony signals as well as telegraphy. Battery power source consisted of a combination pack with 1.5 volts for filaments and 99 volts for the high tension supply.

The sets were designed to provide CW communications within an Infantry battalion, and I believe were also used by commandos. It is a portable set weighing in at 6.3 kilograms complete with spares, battery and aeriels. The set came out of the same factory (Radio Corporation) as the better known No. 108 set, to which it bears a more than superficial resemblance.


2. The Wireless Set No. 108 is a 0.45 watt input AM battery powered HF transceiver and in the case of the Mk. II operates in the 6 to 9 MHz range. The Mk. III version operates from 2.5 to 3.5 MHz. The transmitter and receiver are both VFO controlled. The receiver is designed to receive AM or MCW transmissions. The

Mk. I and III have a 455 kHz IF and the Mk. II a 1600 kHz IF. The battery power source is a 1.5 volt battery for LT and two 45 volt batteries in series for the HT.

The sets were designed to provide AM (AM/MCW in the case of the Mk. III) communications within an Infantry battalion. The set is tuned up by the operator and then put on his back, whereupon the send receive switch action is extended by bowden cable to the front of the operator. I suppose this set could be considered to be one of the early attempts at a walkie-talkie, although at an all up weight of 18.2 kilograms it could be called a struggle-talkie. The normal range set to set in the manpack mode was at least 3 kilometres.



No. 2: Set No. 108

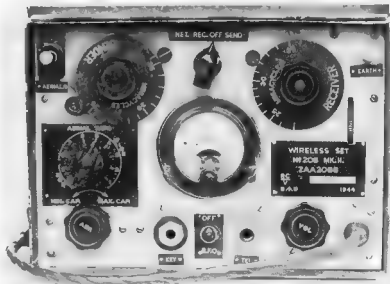

No. 1: Wireless Set No. 208 — Photos by Ken Reynolds VK3YCY.

**DON'T
MISS
THIS**

**INCREDIBLE
BARGAIN
SALE**

**SEE
YOU
THERE**

As a community service, and in the interests of Amateur Radio in general, **DICK SMITH** is donating the **ENTIRE GROSS PROCEEDS**

from the sale and auction of his surplus warehouse stock of spares, samples, shop-soiled returns, etc., to the **WIRELESS INSTITUTE OF AUSTRALIA'S FEDERAL EDUCATION SECTION** for the benefit of Youth Radio work throughout Australia.

OVER \$30,000 WORTH OF EQUIPMENT AT NORMAL RETAIL PRICES, INCLUDING TRANSCEIVERS, MULTIMETERS, SPEAKERS, ANTENNAS, TRANSFORMERS AND A LARGE SELECTION OF ASSORTED COMPONENTS.

All items will be sold on Saturday, 28th October, at the W.I.A. Centre, 14 Atchison Street, Crows Nest, commencing at 12.00 noon. Any unsold items will be auctioned later in the afternoon.

**EVERYTHING MUST GO
NO RESERVE AT THE AUCTION!**

REMEMBER — Some equipment is **BRAND NEW!**
Don't miss the incredible bargains and invest in the future of Amateur Radio at the same time.

TO COMPLEMENT OUR USUAL RANGE OF CRYSTALS

BRIGHT STAR CRYSTALS PTY. LTD.

35 EILEEN ROAD, CLAYTON, VIC., 3168.
Phone: 546-5076 (Area Code 03)

CAN SUPPLY A RANGE OF —

- OSCILLATORS
- WIDE-BAND AMPLIFIERS
- TTL & CMOS
DECADE COUNTERS
- ELECTRONIC CRYSTAL
OVENS



INTERSTATE AGENTS:

Adelaide ROGERS ELECTRONICS — Phone 42 6666
Brisbane FRED HOF & SONS PTY LTD — Phone 47 4311
Perth: COMMUNICATION SYSTEMS — Phone 76 2566
Hobart DILMOND INSTRUMENTS — Phone 47 9077

All Mail to be addressed to: P.O. BOX 42, SPRINGVALE, 3171

ALPHA

**LINEAR HF
POWER AMPLIFIERS**

MODEL 374

MODEL 76P

Enquiries:
JAMES GOODGER VK2JO

**AUSTRALIAN SOUND
AND SIGNAL RESEARCH**

**G.P.O. BOX 5076,
SYDNEY 2001
(02) 36 7756**

CUSTOM COMMUNICATIONS

CNR, LARRA & ORCHARDLEIGH ST.
YENNORA (Near Guildford) N.S.W. 2181

TEL 881 3544
AM 674 1719



SYDNEY AGENTS FOR

ICOM

VICOM

	VAGARRA ANTENNAS	
555k	6 m Sw Beam Antenna	122.00
V5jr	Trap Vertical 40-10m, 5.2m High, No guys required	99.00
V5jr	Trap Vertical 80-10m, 6.2m High, No guys required	139.00
RAK	RAK ANTENNAS: Mod V N 20-10m Trap Horizontal	103.00
RAK	Midv AL4BDXN 40-80m Trap Horizontal Dipole	62.00
RAK	Midv AL24DXN 20-40m Trap Horizontal Dipole	60.00
BM-1	HUSTLER MOBILE ANTENNAS: Traveller Universal Bumper Mount incl. Ball Socket	25.00
MO-2	Fold-over Mast tripod for all resonators	20.00
RM20 RM15	RM10 20m, 15m 18 Resonators	30.00
RM20	10m Resonator	22.00
RM20	50m Resonator	24.00
RS-2	Medium Duty Spring	12.00
DISC	DISCONE ANTENNA 80-400MHz Commercial Disccone	79.00
ARX 2	RINGO ANTENNA Ringo Ranger Gain Omni- Directional for 2 m	49.00
	JAYBEAM ANTENNAS	
	60/70m 40m 70m, 10 50dB Gain	99.00
	45/70m 40m 70m, 15 70dB Gain	76.00
	PBM18/70m, 18m, 70m, 14 94dB Gain	99.00
	10/70m, 10m, 70m, 14 94dB Gain	59.00
	12 74dB Gain	
	43.3/2M 2m 60cm Vagi, 10m, 1 10dB Gain in each plan	99.00
	47/2M 2m 60cm 3 10dB Gain	45.00
	125/2M 1m 2m Beam, 1 40dB Gain	72.00
	PWH/2G Phasing Harness	17.00
	HY-GAIN ELECTRONICS:	
HY-QUAD	10/15/20m 2 elements	349.00
204Ba	4el Monobander for 20m	279.00
204Ba	4el Monobander for 20m	216.00
14AVQ/WB	40-10m Trap Vertical	100.00
18AVT/WB	80-10m Trap Vertical	155.00
THM1K3	10/15/20m 3 el Beam	399.00
TH1J	10/15/20m 3 el Beam	299.00
TH10XK	6el Tribander Beam	399.00
LONG		
MOXN	5el Wide-spread 27, MHz Beam	100.00
	MISC. ANTENNAS & ACCESSORIES:	
LINDENOW	5/8th 1m Mobile, Heavy Fibreglass Base for above	33.00
BELLING- LEE		4.00
KLANG	Magnetic Beam	20.00
AS-KDA	Spring Mount (Base)	20.00
RC5MAU	COAXIAL CABLE (MIL SPEC): 1,000 ft. Reels	30c/m
RC5MAU	500 ft. Reels	30c/m
AS-BL	BALUNS:	
BL50A	50 ohm 1:1K for Dipole	31.00
BL70A	70 ohm 1:1K for Dipole	25.00
		25.00
	ANTENNA COUPLERS:	
CNW-217	Incl. vswr/pwr Direct Reading, 200w pep max	179.00
CNW-417	Incl. vswr/pwr Direct Reading, 500w pep max	219.00
	ANTENNA CHANGE - OVER RELAYS (DAIWA):	
CX-21	1.5 thru 170MHz, 100w pep max	45.00
CX-2H	1.5 thru 450MHz, 200w pep max	50.00
CN201	COAXIAL SWITCHES (DAIWA): 2 Positions, high pwr, up to 500MHz, Commercial Qual.	24.00
CS401	4 Positions, high pwr, up to 500MHz, Commercial Qual.	40.00
	SWR/PWR METERS:	
VQ2	Twist Meter, 3-150MHz with Calibration Chart	34.00
OSKERSLOCK	SWR200, 3-200 MHz, 20/200/2000w	
SW410A	1.5 thru 150MHz Direct Reading	75.00
SW210A	1.5 thru 150MHz 20/120w Direct Reading, Professional	100.00
SWX777	Professional 1.5 thru 30MHz Direct Reading	131.00

MODEL	DESCRIPTION	PRICE
IC701	HF Solid-State 160-10 m Transceiver	1,180.00
IC701P3	Matching Power Supply/ Speaker for above	245.00
IC2BE1	2 m SSB Portable 3 wats	219.00
IC2BE2	4 m SSB Portable 3 wats	219.00
IC2BE3	2 m 1m Synthesised Transceiver	299.00
IC2E1	2m All-Made Transceiver, AC/DC	785.00
IC2E4	2 m 1m Digital Mobile Transceiver -SSB Attachment for above	465.00
IC2E4		142.00
IC2E4	70 cm SSB Portable Transceiver	
IC2E4	Remote Controller for IC701/211/P35	169.00
IC2E4	Crews for IC2E1/22 Series (Pair)	10.40
IC2E4	Crews for Oscar IC2E2E	7.50
IC2E4	4-watt Pack & Charger for Portable	59.80
IC2E4	Condenser-Electric Desk	57.00
IC2E4	Microphone for IC2E4 Rgs	14.50
IC2E4	Brackets for IC2E4 Series	16.00
IC2E4	Brackets for Portables	



RTTY EQUIPMENT

WE CARRY RECOMMENDED PAPE PRINTERS, TAPE
PERFORATORS, TAPE DISTRIBUTORS, DEMODULATORS,
LOOP SUPPLIES, ETC.

15	Page Printer 110V	150.00
15	Tape Rep perforator 110V	150.00
14	Tape Distributors 2 Heads 110V	150.00
DT-600	Demodulators fully built up 170Hz-800Hz	270.00
DT-600		150.00
AFSS	Inclusive 12V Power Supply, Meter, all Plug & Connections	
AFSS	Oscillator, Fully built up Edi includes 6V Power Supply X-Tals for 170 and 850 Hz	60.00
AFSS		40.00
OM-7M	SLOW SCAN T.V. Ham Vision Monitor	
ON-7C	4 inch Monitor Screen Ham-Vision Camera	1400.00
FD30M	LOW PASS FILTERS (DAIWA): 32MHz Fc, 1Kw, 3 stages, good qual	35.00
FD30M	32MHz Fc, 1Kw, 3 stages, good qual	30.00
TE7-41	OMEGA NOISE BRIDGE Up to 100MHz	44.00
	POLAMAR PRODUCTS:	
	IC Keyer	149.00
	VLF Converter	89.00
	Receiver Noise Bridge	79.00
	QMW PRODUCTS	
	137/140MHz Converters	59.00
	142/20MHz Converters	59.00
	142/20MHz Converters	59.00
	20/140/20MHz Converters	79.00
	20/140 "SCORPION" high power Transceiver	225.00
	Low Linear amp 70w max pep	179.00
	2m/430MHz Transceivers	125.00
	COMPRESSORS & PROCESSORS (DAIWA)	
BF440	Speech Processor, phasing type, 6dB Gain	123.00
BF440	Speech Processor, Crystal Filter type, 6dB Gain	163.00
	MORSE KEYS (HI-MOUNT)	
HE700	Dotter Key with Marble Base	30.00
HE700	Economy Key	21.00
HE700	Operator's Key	25.00
HE700	Manipulator (Side-swiper)	41.00
EE1052	Electronic Keyer	160.00
	MICROPHONES	
VM-1	Non-coating, Dynamic, Low Z	9.50
VM-2	Desk Mike with Pre-amp, Dynamic, Low Z	29.80

SIDE BAND ELECTRONICS IMPORTS

P.O. BOX 23, SPRINGWOOD, N.S.W. 2777

WAREHOUSE: 78 CHAPMAN PARADE, FAULCONBRIDGE

TELEPHONE: (047) 51 1394 A.H. (047) 54 1392

HYGAIN antennas have finally arrived, sorry to have to increase the 204-BA price, they cost me now only a few dollars less than the TH3-MK3. The Japanese YEN is now so dear to us that the equivalents of the FT101E, TS-520S and TS-820S retail prices in Japan are now \$820, \$660 and \$1,070 respectively. Importers pay more than 25 per cent in freight, insurance and sales tax, so new imports of these and other YAESU and KENWOOD items will have to go up.

Still available are XEROX copies of service notes for various KENWOOD transceivers and HYGAIN antenna manuals. \$1 for most (no cheques please, they cost now 22c to process), \$2 for more bulky manuals. TS-520S or TS-820S service manuals are 40-80 pages or \$6-\$12 our cost to copy.

HYGAIN ANTENNAS:

18-AVT/WB 10-80m vertical 23 ft. tall	\$125.00
TH6-DXX 10-15-20m senior 6 el Yagi 24 ft. boom	\$300.00
TH3-MK3 10-15-20m senior 3 el Yagi 14 ft. boom	\$240.00
TH3-JR 10-15-20m junior 3 el Yagi 12 ft. boom	\$175.00
204-BA 20m 4 el Tiger array 26 ft. boom	\$230.00
HY-QUAD 10-15-20m full size Cubical Quad	\$260.00
11m 5 el Yagi suitable 10m. w/elements adjusted	\$70.00
2m 8 el Yagi with balun 12 ft. 6 in. boom	\$30.00
BN-86 balun for HYGAIN beam buyers only	\$20.00
BU-8 Japanese baluns suitable for 5 el 10m beams	\$14.00

YAESU MUSEN PRODUCTS:

FT-101E, FT-901D, FT-7, PL-2100B	P.O.A.
FRG-7 5-30 MHz general coverage receiver	\$350.00

ROTATORS:

CDR HAM III rotators on order, expected early October 1978.	
KEN KR-400 Azimuth rotator w/28V AC control box	\$115.00
KEN KR-500 Elevation rotator w/28V AC control box	\$140.00

ACCESSORIES & COAX CONNECTORS:

SWR-50A twin meter 3.5-150 MHz 1 kW SWR/Pwr. meter	\$22.00
FERRIS SWR/Field strength meter	\$15.00
Bumper mount with 3/8 in. thread antenna mount	\$4.50
Gutter mount with 3/8 in. 24 thread antenna mount	\$4.50
5m lengths RG-58U with PL-259 one end	\$3.00
M-ring body mount	\$3.00
12V regulated supply	\$26.00
GLP Right angle RG-58U to SO-239 w/lock nut and weatherproof cap	\$3.50
MLS Right angle RG-58U to PL-259	\$0.90
PL-259 standard or solderless — RG-8U and RG-58U	\$0.75
In-line splice RG-8U and RG-58U	\$0.75
SO-239 chassis connector 2-hole or single w/lock nut	\$0.75
Right Angles and T-connectors	\$1.50
Double male connectors	\$0.85
Mic. sockets, chassis or in-line, 3 or 4 pin	\$0.85
3 circuit mic. jacks	\$0.85
2 ft. 6 in. coloured leads w/crocodile clips — 5 for Crystals for QUARTZ-16 2m transceiver: Channel 51 T/R 146.55, Channel 64 T/R 147.22 — pair	\$5.00
No. 14 hard drawn copper wire — per metre	\$0.10

KENWOOD PRODUCTS:

TS-520S 10-160m SSB/CW transceiver, 240V AC	\$700.00
TS-820S 10-160m SSB/CW w/digital readout	\$1,100.00
TS-700SP 2m all-mode transceiver	\$800.00
TR-7400A 2m transceiver	\$475.00
TR-7500 2m transceiver	\$275.00
DG-5 digital display for TS-520S	\$200.00
TV-506 6m transverter	\$225.00
TV-502 2m transverter	\$250.00
AT-200 antenna matchbox	\$175.00
DS-1A DC-DC converter	\$70.00
DK-520 adaptor for DG-5 to TS-520 use	\$20.00
LF-30A low pass anti-TV1 filter	\$30.00
VFO-820 external VFO for TS-820S	\$175.00
VFO-520S external VFO for TS-520S	\$150.00
SP-820 external speaker for TS-820S	\$60.00
SP-520 external speaker for TS-520S	\$30.00
YG-88C CW filter for TS-820S	\$55.00
YG-3395C CW filter for TS-520S	\$50.00
MC-35S hand-held microphone	\$20.00
HC-2 Ham clock	\$25.00
SM-220 Station monitor	\$300.00
BS-5 (TS-520S) and BS-8 (TS-820S) pan adaptors for SM-220 — each	\$55.00

OTHER TRANSCIEVERS:

ATLAS 210X 10-80m Mobile transceiver w/HD cable	\$825.00
ICOM IC-202 2m SSB portable transceiver	\$175.00
NOVICE SPECIALS — still available at these low prices:	
Transceivers for 10m coverage, AM/USB, 15W PEP —	
(a) SIDE BAND SE-502 240V AC/12V DC inbuilt SWR/RF meter 28 300-28.600 MHz	\$150.00
(b) UNIVERSE 224m 12V DC 24 ch. 28 480-28 595 in 5 kHz steps, Clarifier operates on transmit and receive	\$125.00
Sets of Crystals for Amateur licence holders for converting 23 ch. 27 MHz CB units to 28 MHz, suitable SIDE BAND SE-501A, SE-502, UNIVERSE, KRACO, HY-GAIN V, etc. SSB/AM units:	
Set of 4 crystals converts to 28.3-28.6 (limited quantity)	\$15.00
Set of 8 crystals converts to 28.480-28.595	\$40.00

All prices quoted are net, ex Springwood, NSW, cash with order, subject to change without prior notice. All risk insurance is free; freight by air, road, rail or post at cost. All orders cleared on a 24 hour basis after receipt with payment.

ARIE BLES (VK2AVA), Proprietor.

ROY LOPEZ (VK2BRL), Manager.

NOVICE NOTES

THE SYDNEY — WELCOME TO AMATEUR RADIO PARTY

Sam Voron VK2BVS
2 G-Mith Ave East Roseville, NSW 2069

With around 400 keen hobbyists having just passed the last novice exam in NSW, a group of amateurs, with the help of the NSW Council, organised a welcome to amateur radio party at the WIA repeater and broadcast site at Dural.

About 80 people, including newly licensed, novice students, old licensees and a host of newcomers, came together for a Sunday of relaxation — BBQing, talking and meeting amateurs for the first time in many cases.

Some of those attending included the new members of the Novice Amateur Radio Group who are conducting novice classes each Saturday afternoon at the local WIA HQ. About eight newly licensed novices from the Amateur and Citizens' Radio Club, which included a complete family team, showed fellow club members the ins and outs of the various home made transmitters and other goodies which were on display.

The Killarney Heights Novice Radio Group (membership of which is restricted to those who have at least a 160 metre modified tranny radio) helped to conduct a coverage test on 160 metres from Dural, where it is hoped that a high power AM signal will soon be spanning the State. You should have heard the 160 metre call-backs after the broadcast! 1825 kHz was packed, stations calling on top of other stations — it was bedlam — It was like a 20 metre dogpile — and it was midday! After about 15 callbacks and numerous subsequent listeners' reports from as far afield as Gosford, we realised Dural must be a 160 metres paradise — and we were only using 20 watts to an inverted Vee antenna.

The welcome to amateur radio party was an opportunity for WIA members to meet all our newcomers and give them a big welcome to the hobby.

In this day and age where the individual newly licensed operator in many cases must fend for himself or herself — this concept of an open invitation certainly encouraged some personal contact between the new and old licensees, many of whom had not yet set up their stations. Lots of practical advice on how to put up aerials for the different bands and what type of gear to start off with, certainly made involvement with this WIA supported activity relevant to the new amateur. In fact so much so that WIA membership applications were going like hot cakes.

Publicity to attract new licensees was via WIA broadcasts on 10 metres (which is very popular for local novice working

nowadays), on 11 metres (for those lucky GBers who passed the last novice but still didn't have any amateur gear and were still awaiting their amateur call signs), at the novice group meetings to let the newcomers get involved in the thing they are studying towards, and over 2GB commercial radio to let the general public find out at bit more about our hobby.

The concept of a welcome to amateur radio party was such a success that it is hoped the interest generated within the new licensees and newcomers will spill into other WIA activities.

It is hoped that prior to each amateur exam (four per year) an amateur radio week-end will be held for newcomers and those studying for their licences, and that after the exams a welcome to amateur radio party becomes part of the regular Sydney scene.

Special thanks for organising the Dural site and helping the concept take off goes to Roger VK2ZIG, Jeff VK2BYY, Tim VK2ZTM, Henry VK2ZHE and all the rest of the gang who came along and helped.




PHOTO No. 3



PHOTO No. 1



PHOTO No. 4



PHOTO No. 2



PHOTO No. 5



PHOTO No. 6



PHOTO No. 7



PHOTO No. 8

PHOTO No. 4

Here is Jeff Pages VK2BYI. Jeff is in action showing the newcomers what makes the Dural repeater channel 8 system tick.

DEMONSTRATIONS

PHOTO No. 5

Brother Cyril Quinlan VK2ACQ, Convener of the week-end activities, shows us what makes things tick.

MEETING OTHER MEMBERS

PHOTO No. 6

Meet Steven Tilley. Steve and Dad passed their novice exam and are waiting for their call signs and have come along to take a crack at the full licence. Steve, by the way, is one of at least two 12-year-olds who passed the last novice exam in Sydney. His rig is an FT7 and his portable antenna is a chopped down 11 metre ringo. By the way, fingers crossed that the P. and T. drop the age limit on the AOCB by the time Steve is set to go for it!

THE YOUNGEST YL NOVICE?

PHOTO No. 7

Keira James is only 11 years old, she already knows the morse code and wants to become the youngest YL novice at the next novice exam. You also see Mack Craig VK2NIV, he got his licence when he was 15 and he is giving Keira some pointers in radio operating.

OPERATING PORTABLE

PHOTO No. 8

Paul Phelan VK2NYO is 14. He likes to come along and help those getting started up at the amateur week-end activities. Paul himself started with 100 milliwatts, then 1 watt, 23 channels AM then 23 channels SSB, and now he's got an FT101E.

So what will happen on the October week-end? Come along and find out, we only have food and accommodation available for 160 people, so be quick. If you would like to set up your gear or just come along and help, if you're new to radio or an oldtimer we would like to have you aboard.

It's only \$17 for the lot. If you bring your family then it's only \$10 for mum and \$5 per kid.

To have everything prepared for you contact Bill or Mildred Newton, 64 Valley Road, Epping, NSW 2121, or phone Sydney on (02) 85 6321.

AMATEUR RADIO WEEK-END, 21st, 22nd, 23rd OCTOBER, AT KATOOMBA, NSW

A big get together of newcomers, prospective novices and licensees is being organised by the Wireless Institute of Aust. Education Service (NSW) incorporating the Youth Radio Service.

The fun starts at 8 p.m. on Friday, 21st October, 1978, and concludes on Sunday, 4 p.m., 23rd October. The venue is the St. Marie's Education Centre, just a few hundred metres from Katoomba railway station on the Sydney side of the Great Western Highway.

In July over 60 people from around NSW, Victoria and Queensland attended this fun study week-end. And now it is time to get set for the November novice exam or maybe you only just heard about the hobby and want to find out more — well then the July activities will give you an idea of what to expect.

ALIGNING YOUR MODIFIED CB TRANSCEIVER DEAD ON FREQUENCY

Some people who are using transceivers such as the Sideband Electronics SE502, which contain a set of four 16 MHz crystals to achieve operation on 28 MHz, and others who have obtained similar crystals in place of the existing set of four 14 MHz crystals have found that they have been 1 to 2 kHz off frequency.

This problem is easily solved by removing the four 22pF capacitors which are in series with the four 16 MHz crystals. You will now find that the trimmer capacitors which are in series with each of the 4 crystals will be able to zero your transceiver dead on to channel.

The fixed 22 pF capacitors are easiest removed from the printed circuit board by simply lifting one lead out of the board.

See also the articles "Modifying CB Transceivers to 10 Metres" and "More on Modifying 11 Metre Transceivers" published in AR for August and September 1978 issues.

Sam Voron VK2BVS

WIA CORRESPONDENCE

POSTAL AND TELECOMMUNICATIONS DEPARTMENT

GPO Box 5412CC,
Melbourne, Vic. 3001

Reference: RB4/11/30.

The Secretary,
Wireless Institute of Australia,
PO Box 150,
TOORAK, VIC. 3142.

Dear Sir,

Reference is made to your letter of 25 May, 1978, in which a request was made to extend the upper limit of the 80 metre Novice band from 3575 kHz to 3625 kHz.

Following Departmental investigations into the use of 80 metre band by Novice amateurs, the Department is pleased to advise that, effective forthwith the authorised 80 metre transmitting band for Novice amateurs will be 3525 to 3625 kHz.

The Department has taken the necessary steps to amend the licence accordingly and advise the relevant offices. Would you please give this matter publicity through the avenues available to the Institute.

Yours faithfully,

J. D. Williamson, for Secretary.

(The above letter was received at the Federal office on 8/8/78.)

PHOTO No. 1

The welcome to amateur radio week-end takes off with the salute to the 160m test relay of the broadcast on 1825 kHz from Dural. Results showed a superior coverage over the suburban site normally used to originate the relay.

From left, a TS520S, a modified 7 transistor tranny modified on to 160 metres after 3 minutes work, two 10 watt AM portable transceivers on 1825 kHz and a 2 metre FM transceiver. Operating the gear you see Martin Landsdown from the Kilmer Heights Novice Radio Group and WIA Councillor Tim Mills VK2ZTM.

PHOTO No. 2

Would you believe that Roger VK2ZIG climbed 50 feet up the tower to put up the 160 metre inverted Vee — shows how keen he is — and he doesn't even have a full call! 1.8 MHz sure must have something going for it.

PHOTO No. 3

Here is part of the display at the Dural welcome. Well known 5 and 2 metre personality Graham VK2ZV decorates the display with support from Jeff VK2BYI, officer of our VHF and TV group and Dural maintenance team.

AMATEUR SATELLITES

Bob Arnold VK3ZBB

A NEW SATELLITE

According to information in HR Report published by Ham Radio Magazine an Amateur Transponder could fly on Hughes' SYNNOC 4 in 1980 or 1981. The proposed satellite would be launched by Space Shuttle and placed in synchronous orbit over the Americas.

AMSAT Canada has made proposals for this project and has already revitalised its organisation and elected officers and Directors. VE2DNM is President, VE3ACF Secretary and the mailing address Box 7306, Vanier, Ontario K1L8E4.

A little bird says that SYNNOC 4 could be located over the Pacific Ocean; if so, there is a possibility of communication to Australia and New Zealand if the antenna points in this direction!

Don't be confused, this proposal is not the well publicised Phase 3 OSCAR which is scheduled for elliptical orbit.

USCAR 7

Communication on Mode J, 145.95 up, 435.15 down is obviously a tough assignment if the number of operators is any guide.

ZL1BDU is the most consistent and powerful signal in VK3 with occasional sorties by ZL3AAD, VK4TL, VK3ACH, VK5HI and yours truly. Mode A is consistently good with many stations working both local and DX stations. I wish local 10 metre stations would remember that 29.3 to 29.5 is allocated to satellite operations and avoid this segment, both morning and evening.

A NEW COUNTRY

Graham VK0GM at Casey Base, has been active on OSCAR 7 Modes A and B and OSCAR 8 Mode A.

It is particularly pleasing to have a new OSCAR country to work and we all thank Graham for his interest.

I am proud to have a QSL card confirming the first contact on AO7 Mode B between VK0 and VK3. Col VK7LZ made the first contact on Mode A. Graham's QSL Manager is Steven VK3OT who QSL's by return if a SASE is sent. Thanks also to Steve.

THE WANDERER RETURNS

Welcome to Les VK3BKF formerly VK3ZUR who has returned home after a two-year sojourn in England, and congratulations on the new call. Les worked OSCAR using his G call and was astounded at the activity in Europe. He is presently refurbishing his gear and should be communicating with us again by the time these notes are printed.

ANOTHER NEW COUNTRY

On a number of occasions FK8BB has been heard working many VK's and ZL's.

Peter, who is located in Noumea, New Hebrides, gives an excellent signal on Mode A particularly on the early passes accessible to the Eastern States. Good work Peter, we hope to see you on Modes B and J in due course.

YET OTHER

Stahw OSCAR operator, Charlie VK3ACR, reports a scratchy and incomplete contact with YB1CS in Indonesia. This was on a late pass in Melbourne on ascending node 220 and again on Mode A. Perhaps further contacts will be made before this report is published—keep trying Charlie. John, VK4TL, reports receiving a QSL from KG8PO confirming his contact last Summer. John has also heard YB1CS and has made contact with KR6 in Saipan on Mode A.

RUSSIAN OSCARS

A comment in AMSAT Newsletter indicates that the long-awaited Russian satellites should be launched this year and at a high altitude—how high and when remains to be seen, but we shall certainly be thrilled to have them in service.

BROADBAND OPERATIONS

One of the most prolific operators is Frank VK2ZI. From Broken Hill, Frank operates both OSCAR 7 and 8 on Modes A, B and J with excellent results. Many OSCAR operators appreciate Frank's cheery voice and persistence in completing contacts under difficult conditions.

APPRECIATION

Thanks to our Editor, Bruce, for agreeing to provide larger print for our notes. I hope the readers of this column will appreciate this improvement.

ORBIT PREDICTIONS — NOVEMBER, 1978

OSCAR 7				OSCAR 8			
Date	Orbit	Time Long	Time Lat	Date	Orbit	Time Long	Time Lat
		Z * W				Z * W	
1	181 2019	0144	05	1	3352A	0028	48
2	18132A	0044	01	2	3368A	0031	47
3	181458	0138	08	3	3380A	0036	48
4	181573	0227	00	4	3394J	0041	50
5	18170A	0132	08	5	3406J	0047	51
6	181828	0031	06	6	3422A	0052	53
7	181958	0125	01	7	3436A	0057	54
8	18207A	0018	06	8	3450A	0102	65
9	182206	0119	00	9	3464A	0107	57
10	182325	0018	05	10	3478A	0113	58
11	18245A	0112	08	11	3492J	0118	59
12	18257B	0012	03	12	3506J	0123	00
13	182706	0106	07	13	3520A	0128	02
14	18282A	0055	02	14	3534A	0133	03
15	182958	0100	05	15	3548A	0138	04
16	18308B	0154	08	16	3561A	0001	41
17	18320A	0053	04	17	3575A	0006	42
18	18333B	0148	07	18	3589J	0011	43
19	18345B	0047	02	19	3603J	0016	44
20	18358A	0141	08	20	3617A	0021	45
21	183706	0041	01	21	3631A	0027	46
22	18383B	0135	04	22	3645A	0032	48
23	18395A	0034	08	23	3659A	0038	49
24	18408B	0128	03	24	3673A	0043	50
25	184206	0128	07	25	3687J	0048	52
26	18433A	0122	01	26	3701J	0053	53
27	184458	0022	06	27	3715A	0059	54
28	18458A	0116	08	28	3729A	0104	56
29	18470A	0015	04	29	3743A	0109	57
30	18483B	0109	08	30	3757A	0114	58

Times for OSCAR 8 have been corrected and based on the best information available as at the end of August.

OSCAR PHASE III PROGRESS REPORT

Jan King W3GEY

(Reprinted from AMSAT Newsletter)

Considerable progress has been made on the satellite and ground equipment, however, all of us are beginning to understand and appreciate the problems associated with developing a spacecraft some five times more complex than AMSAT-OSCAR 7. It's really quite a big project. The following is a summary of our progress and problems to date—

ESA/AMAT AND ARIANE

On March 22, 1978, the European Space Agency (ESA) conducted a payload interface meeting to which AMSAT was invited. Since the meeting involved launch operations as well as integration of Phase III to the vehicle, it was mandatory that AMSAT send a US representative. The meeting was held in Toulouse, France, and Karl Meinzer DJ4ZC and myself attended. Many of the detailed interfaces to the ARIANE vehicle were discussed and many safety items relating to our kick motor (as could be expected) were reviewed in detail. I am happy to report that AMSAT's scheme for firing the motor and for "keeping it safe" while on the launch vehicle were accepted by ESA. This is important because other proposed schemes would have cost AMSAT several thousand extra dollars and would have increased the satellite weight by about 3 kg. ESA announced during the meeting that there is some chance that the launch could be advanced by one month, to November 1979. This would make an already tight development schedule even tighter.

During the visit to ESA, Karl and I were able to see a considerable amount of hardware. Perhaps the most impressive to me was a one-third scale model of the upper stage of the ARIANE rocket for launch test flight L02, including all the satellites. A complete scale model of Phase III was mounted at its appropriate place on the side of the larger mock-up. A message I came away with from this meeting is that ESA is not taking any chances. This vehicle is going on schedule and based on the things I saw, it's going to be reliable.

PHASE III GROUND STATIONS

AND IFs

Ground operations for the Phase III launch are far more demanding than those needed for Phase II satellites. For this reason, ground equipment needs to be finished well ahead of the satellite. Since Randy Smith VE3SAT will be away on extended leave during the first part of the Phase III-A mission, John Fox W0LER and Ron Dunbar, W0PN together will be prime command and telemetry stations for Phase

III. Randy will join in upon his return. Located approximately 200 miles apart, Ron and John will have a truly complimentary system. Each ground station can back up the other. In fact, each can control the other's station from his own location via telephone or radio link. The Minnesota team expects to complete their ground station check-out by this fall and begin a one-year training period in preparation for the launch. Included will be several simulations for the launch day.

In order to facilitate writing software for the new spacecraft, Karl DJ4ZC has developed a high-level language for the RCA CDP-1082 processor and for the 8080s which will be used at the ground stations. This language, known as IPS (for a German acronym), is a structural language which has some similarities to a language known as FORTH. Among its features, many of them unique, is the fact that the mnemonics themselves are bilingual. They may be changed from German to English (or vice versa) under software control. AMSAT hopes to make this language available to its members as part of a Phase III package which will also include printed-circuit boards needed for demodulating the engineering beacon telemetry and interfacing to a microprocessor, as well as needed documentation. We still have a way to go before this can be done.

Ron WOPN recently went to Germany (taking along and bringing back an 8080 system) to visit Karl and complete needed documentation to interface IPS to the 8080 system he and John WOLER are using. This visit also served to bring Ron up to speed on all the engineering details on the Phase III spacecraft.

AMSAT-OSCAR SPACECRAFT LABORATORY

On May 5, 1978, NASA and AMSAT signed a contract to jointly pursue a project that will allow AMSAT to demonstrate to the public how amateurs build spacecraft (specifically Phase III). Under the terms of the contract, AMSAT and NASA will jointly fund a facility at the Goddard Space Flight Center to be used by AMSAT to construct our new Phase III satellites. In return, AMSAT will demonstrate to NASA visitors our approach to low-cost aerospace construction. The facility, about 700 square feet in area, includes an integration area, an assembly laboratory, a much-needed storage area for high reliability components, and an office area. The building should be ready in August and will be dedicated at our Annual Meeting on October 14th.

PHASE III SPACECRAFT

(A) Structure:

More than any other part of the spacecraft, the structure has undergone an evolutionary process. After a number of preliminary concepts were discarded and two different models were built, a structure known as the ETU (Engineering Test Unit)

was built in West Germany. The structure was then sent to the US where a "dummy" kick motor and wooden modules were installed to simulate the flight spacecraft. In December of 1977 the ETU was sent to the Cal. Tech. Jet Propulsion Lab. in California where it was subjected to vibration qualification tests at levels specified for the ARIANE vehicle. While the structure passed the tests successfully, a number of changes were suggested by the test results. These changes are now being incorporated into the final design and materials are being ordered in preparation for assembly of the flight structures (two will be built). In the meantime, the ETU was returned to AMSAT-DL for inclusion of engineering model electronic modules. The completed ETU will then be sent to ESA for further testing starting in September of this year.

(B) IHU:

Of the electronic system in Phase III, the Integrated Housekeeping Unit (IHU) is the most tested and ready for flight. The IHU which contains the COSMAC microprocessor has been tested at the prototype level for many thousands of hours. The command detector and telemetry encoder schemes have been tested in prototypes with GDP-1801 COSMAC while located at a remote repeater site (80 miles distant from the control site). The results (in terms of bit error rate) are extremely close to the theoretically predicted performance. With the ever-improving technology in CMOS devices, it now will be possible to fit 16K of RAM memory in the flight IHU instead of the originally-planned 2K of memory. Features have been added to the IHU to allow range measurements to be made via the command and telemetry links, and to allow retransmission of the results of range measurements from one command station to another, again via the IHU.

(C) Power Sub-system:

AMSAT is presently working with NASA and NOAA to obtain 48 battery cells remaining from the ITOS satellite program (enough cells for several spacecraft). In addition, some 10,000 solar cells may also be obtained from the same source. While the cost of the cells is itself high, even if the cells are donated the cost of the cover slips and fabrication will still amount to approximately \$10 per cell. (Those members who sponsored solar cells take note — at \$10 per cell (assembled) it's a bargain!) We should know the prospects of obtaining this leftover hardware by the time you read this.

The battery charge regulator (BCR) for Phase III is very similar to that flying in AMSAT-OSCAR 8. Although A-O-B's BCR is less sophisticated than that for Phase III, it verifies the concept of converting power from 28 volt solar arrays to a 12-14 volt battery system which is the same for both satellites. In Phase III, the BCR and all other DC-to-DC converters will be contained in a single power module.

(D) Attitude Control Sub-system:

The concept that makes Phase III so different from previous satellites is that it has an "active" attitude control system. This difference is quite profound. While former satellites were mere "boxes" with electronics inside, this spacecraft is a robot which can be instructed to assume any attitude we choose in space under remote control and it can tell us when it gets there. We have one constraint with our robot though. It wants to spin about one axis. In fact, with the IHU, we may store nearly any number of motions of the spin axis for execution at a later time or under a certain set of conditions.

The components for this system have now all been selected. One "eye" of the robot is similar to a sun sensor used previously on another NASA mission. The sensor tells the spacecraft where the sun is in relation to the spin axis and when the sun passes by one of the three arrays. The second "eye" is an earth sensor which gives the relationship of the earth to the satellite at various points in the orbit. The earth sensor is being developed by DJ4ZC with components provided by Leitz, a West German optics manufacturer. The force applied by the satellite to cause it to attain the proper attitude is via interaction of the earth's magnetic field with a large magnetic torquing coil network aboard the spacecraft. Most of the electronics required in this subsystem is to interface these components with the IHU. Many of the logic operations which were once handled by discrete logic controllers can now be performed by the software. A prototype of the torquer coil assembly and the earth sensor are now being assembled in West Germany.

The remaining component in the attitude control system is a fluid damping system; it consists of small tubes partially filled with a viscous fluid, and will stop a nutation (wobble) of the spin axis in a matter of seconds. Prototypes of these tubes have been built and tested and are being incorporated into the ETU.

(E) Transponder:

The 50-watt version of the 70 cm to 2m transponder is still in breadboard at AMSAT-DL. Werner Haas DJ5KQ has completed the design of the front-end and IF stages and is working on the power amplifier and modulator stages. On flight-quality transponder is expected to be completed by early fall. Unfortunately, due to schedule problems, it presently appears unlikely that the first Phase III spacecraft (Phase III-A) will carry both frequency combinations as had originally been hoped for. The 70 cm to 2m transponder was chosen for development first because it provides better link performance. The 2304 MHz S-Band beacon is likely to be dropped for the same reason and because no allocation can be assured until the 1979 World Administrative Radio Conference.

One particularly continuing problem associated with the transponder has been solved. Until recently it was not possible to find a good quality crystal filter with a bandwidth of 150 kHz. JAMSAT members have approached the Japanese firm which provided the filter for the A-O-8 Mode J transponder regarding this problem and they can provide a 150-kHz bandwidth filter to AMSAT specifications.

(F) Antenna Sub-system:

The antenna system is indeed a very critical system to proper Phase III performance and more work needs to be done

in this area. A computer model for predicting antenna patterns for Phase III has been developed by Tom Clark W3NWI (ex WA3LND). With this model, it was possible to determine that one antenna system at the end of the arms could not be used on two metres as well as 70 cm. It is now felt that a separate 70 cm antenna will be placed along the spin axis of the spacecraft on the end opposite the motor. A one-third scale model of Phase III was recently constructed by Bill Hodzick WA2UDT so that detailed antenna pattern measurements could be made. These measurements are planned to take place in the next few months at NASA so that flight antennas may be built from this data.

SUMMARY

To date, I feel we have made reasonable progress on Phase III, particularly considering the many other activities in which AMSAT has been involved. We do, however, have a long way to go and not much time is left. I would like to personally thank all those who have so generously donated to the Phase III effort and those who have offered their technical help. For those in the latter category, please be patient. Very little of the design information for "production" of the flight electronics has been released by AMSAT-DL. Much of this documentation is expected very soon and we will try to give some work to everyone. ■

THE INTRUDER WATCH COMES OF AGE IN GREAT BRITAIN

Alf Chandler VK3LC

Federal Intruder Watch Co-ordinator

The following is mostly a direct quotation from an article in "Radio Communication" by Stan Cook G5XB and Colin Thomas G3PSM Intruder Watch Co-ordinators in Great Britain. The theme of the article is relevant in Australia also.

"This year marks the 21st anniversary of the RSGB Intruder Watch system. With a little over a year to go before the world administrations and telecommunication organizations find themselves plunging into the next World Administrative Radio Conference, it is perhaps appropriate to report in general on the International Amateur Radio Union Monitoring System and, in particular, the part played by the RSGB IW.

Due chiefly to the energy and foresight of early pioneers, the foundations laid down by the RSGB in 1957 have led to the establishment of a world-wide network of amateur band monitoring stations under the direction of the IARU, bringing together some 30 or more IARU member societies and forging links with nearly as many government regulatory administrations.

Since 1972 G3PSM has taken the responsibility of co-ordinating the worldwide activity of the IARU Monitoring System.

A measure of the work involved in this last operation can be judged by the monthly inflow of intruder reports which now average 2,500.

These reports are cross-checked, integrated, summarized and published in the

Intruder Monthly Summary, a document of some 20 pages, which is distributed to contributing monitoring stations and societies, and to official bodies (including the International Telecommunication Union in Geneva).

In any monitoring operation, accessibility of information and feedback of results is of prime importance. To this end, once monitoring stations are established they are supplied with a copy of the general procedures and instructions in order to regularize reports as regards classification of emissions, traffic description and other salient features of intruding signals. Although the sheer size of the task of logging intrusions of broadcasting stations in the 7 MHz and harmonically related segments is in itself a problem, an even greater one is posed by the proliferation of binary data and teleprinter communications throughout the high frequency spectrum.

The 14 and 21 MHz amateur bands are apparently well known as "happy hunting grounds" for diplomatic, military and commercial systems displaced by interference from their normal operating channels. As a result, QRM from these sources, being of a transitory nature, but nonetheless troublesome, is difficult to identify and even more difficult to trace and make the subject of a meaningful official complaint. However, in recent months, the RSGB Intruder Watch has achieved a measure of success in identifying some of the simpler systems by a kind of delayed action.

Several watchers possessing cassette

recording apparatus have co-operated in this venture by sending with their monthly logs a tape of the aggregate signals, i.e. mark and space tones of the intruders normally logged as "unidentified printer". These, when up-converted from audio to radio frequency by the simple expedient of feeding the tone in question into a low level A3J exciter, are then tuned on a conventional narrow band communication receiver and offered to a time frequency spectral display and, eventually to a hard copy printer. Offenders, hitherto unidentified, who have responded to this treatment include examples of simple FSK (F1 U5) at 50 and 75 bauds, four frequency diplex (F5 U5 and U7) and individual components of independent sideband frequency-division complexes (A7b). In general an intruder is not reported to the Home Office unless the incident is logged and confirmed on two occasions at the same time of day and in two different geographical locations.

This is why the Intruder Watch needs more monitoring stations to produce the necessary evidence to initiate prompt action.

With WARC 79 imminent the assistance of enthusiasts is needed to preserve our exclusive amateur allocations."

Thus, from the above can be seen the difficulties and the aspirations of the Intruder Watch personnel in the UK

The Intruder Watch in Australia is only 11 years old, but it will be interesting to see how we shape up when we "Come of Age". ■

TECHNICAL CORRESPONDENCE

K. W. Gooley VK2BGZ
2/38 Waters Rd., Gremorne 2090
2/7/78

FT101 DIGITAL READOUT

The Editor,
Dear Sir,

Would you please publish the following corrections to Fig. 6 of my outside "Digital Readout for the FT101" of January 1978 issue.

Thank you.

Yours faithfully,

K. W. Gooley VK2BGZ


The Editor,
Dear Sir,

The following errata apply to the article "Delayed braking action for rotators", page 27, August 1978 AR.

First paragraph: "The Ham II control unit does not have . . ." should read "The Ham II control unit does have . . ."

Second paragraph: "When an undelayed stop is required . . ." should read "When an undelayed stop is required . . ."

Geoff Wilson VK3AMK

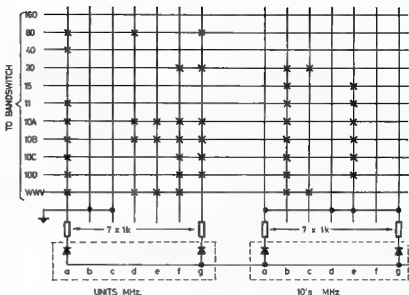

FT101 Digital Readout Corrections — VK2BGZ

AVAILABLE SOON

PALOMAR PTR-130K

RECOMMENDED FOR AMATEUR USE

"We've brought space communications technology down to Earth."

The Palomar PTR-130K incorporates features from the outer perimeters of logic technology to become one of the most outstanding communications systems ever introduced to the communications market. Never before has any communications transceiver approached the capabilities of the Palomar PTR-130K! It's the first completely multi-functional transceiver ever made available to the public!

The Palomar PTR-130K is a miniaturized mobile transceiver capable of operating in 100 cycle resolution from 100 kHz to 30 MHz in all modes of transmission and reception. Instant frequency selection is available with the touch of a finger. Palomar's PTR-130K — space technology, at a down-to-earth price.

PALOMAR PTR-130K TRANSCEIVER

Key Features

- Complete Coverage 1.6-30 MHz.
- Receive Coverage 100 kHz-30 MHz
- True 100 Hz Frequency Synthesizer with 5 kHz Reference (does NOT use D-A Converter as some amateur rigs claiming 100 Hz synthesis).
- 6 Digit Frequency Readout.
- Digital Readout of Signal Strength in dB Above the Noise Floor of Receiver
- RF Compressor Effectively Increases Transmitter Output by 12 dB (16 times)
- Approx 20 watts output.



- Modes: LSB, USB, CW, AM, FM
- Superior Receive Selectivity — Typical Shape Factor 3 dB/80 dB 1/25 (2 Cascaded Collins Mechanical Filters)
- Diode Ring Mixer with Broadband Load to Optimum Intermodulation Performance
- 400 Hz CW Filter
- Size: 6 1/2" x 2 1/2" x 5"
- 56 ICs, including 7 LSI Circuits.
- Watch this space next month for price.

P.O.A.

SL-55 AUDIO ACTIVE NOTCH FILTER DESIGNED FOR THE FT101E

Here is the Receiver Audio Active Filter that makes all others obsolete. The Electronic Research Corporation America Model SL-55 Audio Active Filter adds unequalled versatility in receiver audio processing for SSB and CW. This filter was designed, produced and made available to the amateur community only after painstaking research and field testing of its effectiveness in minimizing QRM. Check these features:

- Continuously tunable bandpass filter (not lowpass) so that the passband may be positioned anywhere from 200 to 1400 Hz. 3 dB bandwidth is continuously adjustable from 14 to greater than 2100 Hz (20 dB bandwidth from 140 to 2100 Hz)
- Audio input and output impedance is eight ohms with one watt output capability
- Dimensions: 6.5 x 7.5 x 3.5 inches
- Available in gray to match FT101E



\$129

- Positioning of simultaneous notch filter is continuously variable from 300 to 1400 Hz with FINE and COARSE position controls. Notch depth is fixed at nominally 30 dB.
- Notch tuning is independent of bandpass tuning and may be completely disabled
- Bypass switch restores the receiver audio output path to its original configuration
- Power Requirements: 240V AC at less than 1/18 amp.
- No batteries needed.

BAY CITY ELECTRONICS PTY. LTD.

SHOP 11, STATION STREET, FRANKSTON 3199, PHONE 783 9212

BANKCARD WELCOME

New Release \$295

TRANVERTER MODEL MMT 432/144S

UTILIZING an IF of 144MHz * 10 WATTS DRIVE of 1/2 WATT * VOX OPERATED, TWO SELECTABLE RANGES

FEATURES EXTENDED COVERAGE FOR OSCAR 8

This 432 solid state linear transverter is intended for use with a 144 MHz transceiver to produce a high reliability transceive capability. A 10 watt load and RF sensing network eliminates the need for any ancillary circuitry. A single coaxial connection is all that is required between the transverter and the associated 144 MHz transceiver.

A wide range of applications is offered by the MMT432/114 transverter, which by virtue of its linear mode of operation will enable 144 MHz SSB, FM, AM or CW equipment to be used at 432 MHz to 436 MHz.

Simply connect direct to your 2 metre rig, 12 volt supply, fit 70 cm antenna for instant SSB, FM, AM, CW operation, coverage 432-434/434-436 in two ranges.

FEATURES High quality double-sided glass fibre printed board * Highly stable zener controlled oscillator stages * PIN diode aerial changeover relay with less than 0.2 dB through loss * Extremely low noise receive converter, typical 3 dB * Separate receive converter output gives independent receiver facility * Built in Automatic RF VOX with override facility * Built in 10 watt 144 MHz termination, selectable attenuator for 1/2 watt

* Use of the latest state of the art Power Amplifier transistors provide reliable 10 watts continuous output

MODEL MMT432/144S Price \$295

TRANVERTER MODEL MMT 432/28S Features extended coverage for Oscar 8

Second Crystal Oscillator gives two ranges. Low 432 - 434 MHz - High 434 - 436 MHz. Programming available to either Transmit/Receive both Low, both High, or a mixture of the two. Adjustable Drive Level is now provided by an input potentiometer. Optional RF VOX

Power Output 10 watts minimum * 28 MHz IF * Drive 1 mW to 500 mW * Aerial Changeover by PIN diode switch * Modern Microstrip Techniques * Power requirements 12 volt nominal at 150 mA 2.5 amp. peak * Case size 187 x 120 x 53 mm * Spare 432 input socket

MODEL MMT 432/28S Price \$245

MODEL MMT 144/28 Price \$185



500 MHz COUNTER Model MMD500/500

SPECIFICATION

Digit Height	10 mm
Display Width	45 mm
Case Size	111 x 60 x 27 mm
Frequency Ranges	0.45 - 500 MHz, 50 - 500 MHz Better than 50 mV RMS over 0.45 - 50 MHz. Better than 200 mV RMS over 50 - 500 MHz
Input Connector	50 ohm BNC
Input Impedance	200 ohm approximately
Power Connector	5 pin 270 deg locking DIN socket (supplied with plug).
Power Requirements	11 - 15 volts DC at 300 mA approximately

Model MMD500/500 - 500 MHz Counter, \$175

DUAL RANGE 432 - 434 MHz & 434 - 436 MHz CONVERTER

TYPE: MMC432/28S & MMC 432/144S

Price: \$67.00

FEATURES:

- * Extra Range (434-436 MHz) For Satellite Reception
- * Ultra Low Noise First RF Amplifier Stage
- * Highly Stable Zener Diode Controlled Crystal Oscillator and Multiplier Stages

SPECIFICATIONS:

Input frequency ranges:	432-434 MHz (low)
	434-436 MHz (high)
I.F. output frequency	28-30 MHz or 144 146 MHz
Typical gain	30dB
Noise figure:	3dB Maximum
D.C. Power requirements:	11-13.8 volts
	12.5V nominal
Current consumption	50 mA Maximum



BNC CONNECTORS - Excellent quality, fully imported from U.K. - U.S. Mil. No. UG88E/U Price: \$1.35 each.

NEW READY-TO-OPERATE MODULES AVAILABLE IN THE SALES PROGRAM OF VHF COMMUNICATIONS.

All modules are enclosed in black cast-aluminium cases of 13cm by 6cm by 13cm and are fitted with BNC connectors. Input and output impedance is 50 ohms. Completely professional technology, manufacture, and alignment. Extremely suitable for operation via satellite or for normal VHF/UHF communications.

6 METRE MOSFET CONVERTER

Featuring 24 MHz local oscillator output for transverter use:

Input frequency:	52-54 MHz
I.F. Output Frequency:	20-30 MHz
Typical Gain:	30 dB
Noise Figure:	2.5 dB
Typical Image rejection	65 dB
Crystal Oscillator Frequency	24 MHz
Power requirements:	12 volt ± 25% at 35 mA

MODEL MMCS2/28LO Price: \$49.00

1296 MHz CONVERTER

Microstrip line, Schottky diode mixer.
IF 28-30 MHz or 144-146 MHz
Noise figure: typ. 8.5 dB
Overall gain 25 dB Price: \$66.00

CONVERTERS
PACK & POST \$2.00

144 MHz MOSFET CONVERTER

Noise figure: typ. 2.8 dB.
Overall gain: typ. 30 dB.
IF: 28-30 MHz, 9-15 V 20 mA.
Price: \$45.00
VARACTOR TRIPLER 432/1296
Max. input at 432 MHz, 24 W (FM, CW) - 12 W (AM)
Max output at 1296 MHz, 14 W
Price: \$74.00

AMATEUR ELECTRONIC IMPORTS IS THE EXCLUSIVE AUSTRALIAN DISTRIBUTORS FOR THESE PRECISION BRITISH MADE UNITS FROM MICROWAVE MODULES LTD.

All prices subject to change without notice. Onwards forwarding please add sufficient for freight or postage. Excess will be refunded.

Amateur Electronic Imports

P.O. BOX 160, KOGARAH, N.S.W. 2217
TELEPHONE: (02) 547-1467
CABLE: "AMATEURIMPORT, SYDNEY"

NEW

MML 432/100, 100 WATT 432 MHz LINEAR POWER AMPLIFIER

FEATURES

- * 100 watts minimum output 10dB minimum gain
- * Fully protected against poor load VSWR, overheating and excessive or reverse supply rails.
- * Equipped with RF VOX and manual override
- * Supplied with power lead and all connectors

Frequency bandwidth:

435 MHz \pm 15 MHz @ -1 dB

Power requirements: 12.5 V nominal
@ 20 amps for 100 output, 13.8 V maximum.

RF Input connector: 50 ohm BNC
RF Output connector: 50 ohm 'N' type

Weight: 4 kg (8lb, 13 oz.)

Overall Size: 315 x 142 x 105 mm.
12 3/8 x 5 5/8 x 4 1/8"

SPECIFICATION: Power Gain : 10 dB minimum
Power output : 100 watts RMS output @ 1 dB compression
Power input : 10 watts nominal for 100 watts output

PRICE \$395

DESCRIPTION

This solid state 432 MHz linear power amplifier, MML432/100, is intended for use with any existing 432 MHz equipment having an output power of 10 watts. When used in conjunction with such a drive source this linear amplifier will provide a power output of 100 watts minimum.

The inclusion of the latest state of the art power transistors (each of the final transistors being rated at 145 W dissipation), guarantees a highly reliable and ultra-linear unit which is suitable for all modes of operation. (SSB, FM, AM, CW, RTTY and TV).

The amplifier utilises recently developed matching techniques which allow safe operation even when improperly subjected simultaneously to 50% overdrive and a supply voltage of 15 V.

However, as a further safeguard against damage to the final transistors, the following protection circuitry has been included to shutdown the unit in cases of poor load VSWR, overheating, and excessive or reverse supply rails

- (i) **HIGH VSWR** The amplifier will automatically shutdown into the straight through mode should the sensing circuitry detect a load VSWR of worse than 2.5:1 at the antenna socket

The mode of shutdown will be indicated by the illumination of an LED status light on the front panel.

The sensing circuitry will test for an improvement in the load VSWR every 8 seconds. When the load VSWR returns to less than 2.5:1 the sensing circuitry will allow the unit to return to normal operation.

- (ii) **THERMAL** Should the heatsink temperature reach 65°C or more, the amplifier will automatically shutdown into the straight through mode, until the heatsink falls well below this temperature

This mode of shutdown will be indicated by the illumination of an LED status light on the front panel.

- (iii) **OVERVOLTAGE AND REVERSE POLARITY** The incorporation of a crowbar circuit protects the transistors against reverse polarity or an excessive supply voltage. This will automatically shutdown the unit should the supply voltage exceed 15 V or should the supply be reversed

By means of an internal RF vox circuit the linear will automatically switch onto transmit when 432 MHz drive is applied to the input socket. However, this facility may be overridden by the application of an earth to the phono socket located on the rear panel. This may be achieved by connection to the transceiver PTT switching line

An integrated circuit network provides a well-regulated bias supply for the final transistors, and each transistor is individually thermally tracked against ambient temperature variation and operational temperature rise.

All RF circuitry is constructed on high quality double sided TEFLON PC board and the use of broadband stripline techniques gives the unit a bandwidth of 420-450 MHz, without the need to re-tune.

The unit is housed in a highly durable, black steel case. RF input and output sockets are located on the rear panel, together with the 12 volt supply fuse, and the push to talk line phono socket. The unit is supplied fitted with a 12 V supply cable, plugs for both input and output connectors, a phono plug for the PTT line, and a spare fuse.

Amateur Electronic Imports

P.O. BOX 160, KOGARAH, N.S.W. 2217

TELEPHONE: (02) 547-1467

CABLE: "AMATEURIMPORT, SYDNEY"

CHIRNSIDE ELECTRONICS

CHIRNSIDE ELECTRONICS THE BEST ON
PRICE AND SERVICE **SAVE \$\$\$**

DIRECTOR FRED SWART
VK3NBI

KENWOOD

4
YAESU



P.O.A.

FT-901DM 160-10M Transceiver.
FT-101E 160-10M Transceiver.
FT-301 160-10M Transceiver.
FT-301S 160-10M Transceiver.
FT-301D 160-10M Digital Transceiver.
FT-7 80-10M Transceiver.
FR-4 Matching Power Supply.
FRG-7 General Coverage Receiver.
FRG-7000 Digital General Coverage Receiver.
FT-227R 2m Mobile Transceiver.
FT-227RDM 2M ALL Mode Transceiver.
FR-101 D. Receiver.
FR-101 DD Digital Receiver.
FL-2100B 1200 Watt Linear Amplifier.
FL-110 200 Watt DC Input Linear Amplifier.
VO-100 Monitor Scope for FT-101E.
VO-101 Monitor Scope for FT-101E, new model.
VO-301 Monitor Scope for FT-301 series.
FR-301D Matching Power Supply for FT-301 series.
FR-301D Digital Power Supply.
FR-150 Dummy Load-Watt Meter.
YD-844 Desk Mic.
YD-244 24 Hr. World Clock.
RV-101 Matching VFO for FT-101E.
RV-301 Matching VFO for FT-301 Series.
RC-301 Antenna Coupler for SWR and PWR Meters.
VO-500S 500 kHz Frequency Counter.
VO-500J 300 MHz Frequency Counter.
FL-101 Transmitter Companion Unit for FR-101.
FTV-650B 6M Transverter.
FTV-250 2M Transverter.
R-301 Relay box for FT-301 to FL-2100B.
SP-101 Matching External Speakers for FT-101E, FR-101, FRG-7 FT-301.
YC-601 Digital readout Adaptor for FT-101E.
YD-845 Hand Mic.
FT-6250 6M ALL Mode Transceiver.
FT-225R All Mode Transceiver Analog Dial.
Optional Crystal Filters.

FT-227R. 2m.



\$369

QTR-24.



\$33.



YD-148

MORSE KEYS.
HK-707 On standard base with dust cover.
HK-710 De Luxe heavy duty morse key.
TC-701 Practice key with built in Osc.
EKM-1A Morse Practice Dac.



YAESU FL-2100B



FEW ONLY

\$519

YP-150



\$108.

YAESU FRG-7000 ... \$679.



CHIRNSIDE ELECTRONICS
26 EDWARDS RD.
LILYDALE 3140.
PHONE (03)726 7353

EMOTATOR. Relators



103LBX Medium Duty.
502CKX Heavy Duty.
1103MXX Extra Heavy Duty.
1103MXX
1211 Mast Clamp for 103LBX.
1213 Mast Clamp for 502CKX.
1215 Mast Clamp for 1103-3MXX.
300 Mast Stay Bearing.
VCTF-7 7 Core Cable per Metre.
VCTF-6 6 Core Cable per Metre.

YC-601 Digital readout Adaptor for FT-101E \$279.

FT-227RDM. 2M. ALL Mode



\$995

INCLUDES
FREQ. MEMORY UNIT
GIVE US A CALL NOW!

YAESU YO-101
Monitorscope for FT-101E.




NEW MODEL. \$379.

YAESU FT-901DM



\$1599



TS-520S.
P.O.A.

KENWOOD

KENWOOD Equipment available ex-stock

TS-520S HF Transceiver as only
TS-820S HF Digital Transceiver as only
SP-820 Matching speaker for TS-520S
SP-820 Matching speaker for TS-820S inc. filters.
VFO-820 Matching VFO for TS-520S
VFO-520 Matching VFO for TS-520S
SH-220 Monitor Scope Kenwood series.
DG-5 Digital Display for TS-820S.
DS-1A DC Converter TS-520-820
AT-200 Matching Antenna Tuner Power meter including antenna switch.
Optional crystal filters.
MC-355 Hand Mike HI Z.
MC-50 Base Mike HI and LO Z.

All Equipment pre-sales checked and wired for 240v ac operation!!!!

MISC

SWR-200. Large dual meter SWR.
FS-600A. Peak Reading Wattmeter SWR Meter.
ME-11X. Twin SWR-PWR Meter. 3.5-150MHz.
RE-101. Small single SWR Meter.
Western 6 Pos. Coax Switch.
Daves 2 Pos. Coax Switch.
TWS-120. 2 Pos. Slide Coax Switch.
VS-1. Mini Mic. Compressor.
VS-8K. Ferrite Bead 2Kw for Beams and Doblebs.
TV-42. Drake 3 Section Low Pass Filter. 1.5Kw.
Multi-band diode traps and centre insulator 80-10M.
Porcelain Epo Insulators.
Wide Range of Coax Cable and Connectors in stock.
Yaesu Gutter Mount Mobile Whips. Complete set 80-10M inc. 2M.
A5H AS-303. HF Mobile antenna set inc. ball mount and spring.
AS-NK Matching SS Bumper Mount for AS-303.



ANTENNA COUPLERS

HC-75. Tokyo Hy-Power Labs. Transmatch 75W PEP.
HC-250. Tokyo Hy-Power Labs. Transmatch 250W PEP.
HC-500. Tokyo Hy-Power Labs. Transmatch 500W PEP inc. 150M.
HC-2500. Tokyo Hy-Power Labs. Transmatch 2.5Kw. PEP.
AT-200. Kenwood 200 Watts
RC-301. Yaesu Inc. 300W and PWR Meters.

HIDAKA.

V5-33. 3el. Triband Beam 20-15-10M Inc. Balun.
V5-22. 3el. Duoband Beam 15-10M Inc. Balun.
V5-41-80KR. 80-10M Trapped Vertical.
V5-RG. Radial K1 for V5-41-80KR

HY-GAIN ANTENNAS.

18-AVT 80-10 M Vertical.
CB-5 Select 11-10 M Beam.
TH-3 Mk. 3 20-15-10 M Beam.
TH-3 Jr. 20-15-10 M Beam.
TH-6 DXX 20-15-10 M 6 EL.
HI-QUAD 3 EL Quad 20-15-10 M

Hygain

All prices include Sales Tax. Freight and Insurance extra.
Prices and specifications are subject to change without notice

2 METRE REPEATERS

The list below is published from material kindly supplied by the WIA NSW Repeater Committee and is dated August 1978.

AUSTRALIAN REPEATERS

Ch. No. Frequency Call Location Remarks

AUSTRALIAN CAPITAL TERRITORY

46/6 146.300/900 VK2RAC Canberra City Operational
47/7 350/950 VK2RG Mt. Ginini Op. late 78

NEW SOUTH WALES

602 146.025/825 VK2RYY RTTY Maitland Op. late 78
41/1 .050/650 VK2RDX Mt. Blinda via Oberon Op. late 78
607 .075/675 VK2RTY RTTY Sydney Prov. & Plan.
42/2 100/700 VK2RPM Port Macquarie Operational
42/2 100/700 VK2RAO Orange Operational
42/2 100/700 VK2RMO Ulladulla/Milton Operational

512 not allocated
43/3 146.150/750 VK2RAG Gosford/Wyong Operational
43/3 .150/750 VK2RWG Wagga Operational
43/3 .150/750 VK2R Bega Prov. & U.C.

617 not allocated
44/4 146.200/800 VK2RLE Heathcote Operational
44/4 .200/800 VK2RIC Lismore Operational

622 not allocated
45/5 146.250/850 VK2RGF Griffith Operational
45/5 .250/850 VK2RAW Woolongong Operational
45/5 .250/850 VK2RAB Gunnedah Operational
627 .275/875 VK2RMB Manly U.C. late 78
46/5 .300/900 VK2RAN Newcastle Operational
632 .325/925 VK2R Gladsville U.C. late 78
47/7 .350/950 VK2RMI Moree Testing

637 not allocated
48/8 400/147.00 VK2RWI Dural Operational
702 147.025/825 Test Ch.
9 .050/825 VK2RBM Blue Mts./Medlow Bath Op'tional

707 not allocated
10 147.100/700 VK2RWC Westlakes/Watigan Mts. "
712 not allocated
11 147.150/750 VK2R City of Sydney Provisional

717
12 147.200/800 VKR2 Upper Hunter Provisional
722 .225/825 VK2RST Hornsby/SSTV U.C.
13 147.250/850 VK2RHD Hornsby Testing

727 not allocated
14 VK2R Nat. ATV Liaison Provisional
732 not allocated
15 146.350/950 VK2RHR High Rang Mittagong Late 78
16 350/950 VK2R Forster Planned

VICTORIA

42/2 146.100/700 VK3RML Mt. Dandenong Operational
43/3 .150/750 VK3RBA Ballarat Operational
44/4 .200/800 VK3RAM Bendigo Operational
44/4 .200/800 VK3RLV Latrobe Valley Operational
45/5 .250/850 VK3RMM Mt. Macedon Testing
46/6 .300/900 VK3RSH Swan Hill Operational
46/6 .300/900 VK3REG East Gippsland Operational
47/7 .350/950 VK3RWZ Gramplan Operational
48/8 400/147.00 VK3ARMA Mildura Operational
48/8 400/147.00 VK3RGL Geelong Operational
48/8 400/147.00 VK3RWE Wodonga Operational

QUEENSLAND

42/2 146.100/700 VK4RGC Gold Coast Operational
42/2 .100/700 VK4RAT Townsville Operational
42/2 .100/700 VK4RAP Rockhampton Operational
44/4 .200/800 VK4RDD Toowoomba Operational
44/4 .200/800 VK4RGU Bundaberg Operational
46/6 .300/900 VK4RAI Ipswich Operational
48/8 400/147.00 VK4RBN Brisbane Operational

SOUTH AUSTRALIA

42/2 146.100/700 VK5RMM North Pirie Operational
45/5 250/825 VK5RHO Port Adelaide Operational
46/6 300/900 VK5RMG Mt. Gambier Operational
48/8 400/147.00 VK5RAD Adelaide Operational

WESTERN AUSTRALIA

42/2 146.100/700 VK6RAP Perth Hills Operational
44/4 .200/800 VK6RAH Perth City Operational
44/4 .200/800 VK6RAA Albany Operational
46/6 .300/900 VK6RBY Bunbury Operational
48/8 400/147.00 VK6RAW Wagin Operational
48/8 400/147.00 VK6RAK Kalgoorlie Operational

TASMANIA

42/2 146.100/700 VK7RHT Mt. Wellington/Hobart Operational
43/3 .150/750 VK7RHW NW Coast/Ulverstone Operational
48/8 400/147.00 VK7RAA NE Coast/Mt Barrow Operational

COMMONLY USED SIMPLE CHANNELS

Ch. 40—146.00 Ch. 49—146.45 Ch. 50—146.50 Ch. 51—146.55
Ch. 52—146.60 Ch. 68—146.40 Ch. 69—147.45 Ch. 70—147.50
Ch. 71—147.55 Ch. 72—148.80

EXPLANATION OF STATUS INDICATORS

- (a) Provisional — Allocation subject to confirmation when more detail is available.
- (b) Planned — Repeater at planning stage.
- (c) U.C. — Repeater under construction.
- (d) Testing — Indicates Repeater under trial operational period on a part or full time basis.

The channel numbering system varies from State to State: Two systems are shown in prime channels i.e. 1-15 in N.S.W. and 41-48 in Victoria. The numbers shown in the 25 kHz splits i.e. three digit numbers are at this time suggestions only.

RETURN OF THE SIX METRE BAND TO AMATEURS — PART 1

Eric Jamieson VK5LP

About 12 months ago I asked interested amateur operators to write to me setting out their views on any moves likely to be made for the return of the 50 to 52 MHz segment of the International six metre band to the Australian Amateur Service. Typically some replied straight away some a little later, others wrote after further prodding, many did not write at all. This of course is a standard amateur response, and not unexpected, but I was surprised at some of the missing call signs. However, life is full of surprises — like the morning a few months ago when you awoke to the news of the likely escalation of the use of Channel 5A (right alongside our 2 metre band) in Australia.

That's another matter, and I may be having more to say on that later.

HISTORICAL AND PREVIOUS RECOMMENDATIONS
Perhaps you should be reminded, a lot of our problems, if not all, came with the advent of television, first with a 10 channel system and later 13 channels, which grew from "The Report of the Radio Frequency Allocation Review Committee", led by Professor Huxley, and tabled in 1961. The Terms of Reference for the Committee were—

- (a) To examine the existing frequency allocations and those arising from the Geneva Conference 1959, insofar as they affect Australia with the object of ascertaining—

- (i) the sections of the allocation table in use,
- (ii) the sections not being used,
- (iii) the extent to which any re-arrangement is possible and/or desirable so that each Department, Authority and the licensed users with a legitimate interest in the administration and/or operation, of approved Radio Services have their reasonable interest and needs for spectrum properly safeguarded;
- (iv) the manner in which any further distribution of available radio frequencies might be effected in the overall National interest
- (b) To examine specially any aspects of the radio frequency position as it affects the Australian

Broadcasting and Television Services as may be referred to the Committee after preliminary review and report to the Postmaster-General by the Australian Broadcasting Control Board.

(c) To make any necessary recommendations on the above matters to the Postmaster-General.

Under (a) (i) the Amateur Service could expect to have their interests considered along with the other services.

ITEM 6.1. THE AMATEUR SERVICE

The proposed allocations provide for the following changes. Allocation of 52 to 54 MHz, the same amount of space as the 58 to 59 MHz Geneva allocation, but 2 MHz less than the existing Australian allocation. Summary. In respect to the Amateur bands the recommended allocations are generally in close agreement with those of the Geneva Table. Where departures from that Table have been recommended they have been considered necessary because of the needs of other Australian services.

ITEM 6.2. THE DEFENCE GROUP

The basic aim of the Defence Group as far as frequency allocations are concerned, is to ensure, as far as possible, global operational compatibility with our Allies both in the military and scientific fields. Thus ideally, all frequency allocations for the Defence Group must be in very close agreement with the Geneva Table.

A problem which arises from time to time is caused by the need, necessarily, of military equipment primarily designed for use in other regions.

Recommendation on Item 6 in the Huxley Report is interesting. "Relating to the protection of frequency users in areas of marginal reception of radio signals. The Radio Frequency Allocation Review Committee, NOTING that there have been instances in which users of properly assigned and properly used frequencies have been required to change frequency or close down to protect television reception in areas of very low signal strength, RECOMMENDS that the assigning authority be directed to support any user who conforms to the official requirements and place the onus of satisfactory reception of radio signals on the individual receiver."

Originally the amateurs were to lose the use of 50 to 52 MHz in 1963 when the former 1 metre band (285 MHz) was discontinued, but the six metre enthusiasts received a reprieve until 1st April, 1964, when the lower two MHz disappeared with the full time operation of Channel 0, which covers 46 to 52 MHz. But that certainly did not end the story. The amateurs of Australia are permitted to operate 52 to 54 MHz providing they do not cause interference to other services, and the one we are concerned with at present is television. A really troubling fact is that Channel 0 interferes with amateurs operating legally in their own band. Interference is experienced principally when operating reasonably close to the transmitter, and consists of extraneous signals spaced every 15.625 kHz across the band. These TV component signals have a rough sound because in effect they are the subcarriers at the line oscillator frequency and have their own sidebands of 50 Hz frame and video components. This type of interference will be worse or less than the normal programmes since the test patterns are electronically generated with better waveforms and consequently more sideband frequency components. The design of the best in filter design, it will be inevitable that some energy must escape from a 100 kW transmitter located a few miles away.

There are two main problems:

If the amateur transmits in a Channel 0 area he will interfere with TV receivers due to their front end design having a wide bandwidth and thus inherently poor selectivity, though this may vary with some brands of TV sets. The second problem is continual rubbish on the amateur band from the Channel 0 transmitter!

The Region III area in which Australia is situated, along with many other Pacific nations, is an area where the 52 to 54 MHz amateur allocation is permitted notably in Japan, Siberia, Hong Kong, Philippines, Hawaii, USA, Mexico, Noumea, New Hebrides, plus other call areas such as K6G, K1U,

CE2, FK6, and most recently P28, who also have been granted full 50 to 54 MHz status. New Zealand was given 52 to 53 MHz. Most of the areas mentioned above have already been worked from Australia since the increasing sumptuous numbers of cycle 21 have been observed. The amateur and many more will be available for working before the cycle wanes once again in two to three years.

Cycle 19 in 1968-69 provided many outstanding contacts from Australia, and the September 1978 issue of AR carried words from a letter published in my notes from Bill VK2RZ, outlining the extent of the six metre coverage by amateur stations at that time. In the light of the experience then which should surely have been still vivid in the minds of those members who compiled the Huxley Report, how a proposal for a TV allocation between 45 and 52 MHz could have been made is beyond comprehension.

AUSTRALIA

Australia is unique in the world in having two non-standard television allocations, Channel 0 and 5A, both of which are immediately alongside an amateur band, our two most used VHF bands. Additionally, because of the three stations, Channel 0 stations in Australia, Melbourne, Brisbane and Wages, spaced just the right distance apart for maximum interference to one another during periods of sporadic E activity, the mind fails to centre on any sound reasons for this allocation. Cycle 19 showed it possible for overseas stations to be heard in Australia, a tremendous strength, and that was before a Channel 0 allocation — I am sure the proprietors of the existing Channel 0 stations now will be looking with some trepidation to the extent of the likely interference pattern in 1979-80. I have personally monitored a number of TV video and sound signals in and around 48 MHz from both Chinese and other Asian areas, and signals can be up to 5 x 8 + 30 dB, and that will cause a lot of ORM to Australian Channel 0 stations, and I will suggest, given the right conditions, those overseas stations will be there for many hours of the day at that strength, and if TEP conditions prevail as well, the signals may well continue right through until midnight local time!

NEW ZEALAND

Our near neighbour New Zealand suffers from interference from the Australian Channel 0 stations on their Channel 1 allocation of 44 to 51 MHz, and it would seem likely they interfere with Channel 0. Perhaps the only good luck story one could speak of is that the Channel 0 stations are lone operators, not like New Zealand where Channel 1 feeds a number of low power transmitters, so anything which upsets the originating stations affects all the others, with the result people in hidden valleys where the ORM with their wealthy neighbours in the cities!

The shortsighted thinking at the time which allowed Channels 3, 4 and 5 to be placed in an International FM band is also beyond comprehension. Now that an FM service has been rightfully established in its correct place in the spectrum, other channels have had to be brought into use to allow the original stations to continue operating. That this has or is being achieved is credit to the licensing authorities except for the proposed increased usage of Channel 5A.

The part which hurts me the most I think is the point I have written about before, is the fact that the USA with something like the land area of Australia, with well over 200 million people, has but only 15 MHz of spectrum. As Americans, they have only the same spectrum space that we have, yet they are able to give their amateur population more frequency space, to the extent of 7 MHz in the VHF spectrum alone (an extra 2 MHz at 50 MHz, and 5 MHz at 220 MHz), yet it would be fair to assume, I venture to say, that they would have many times the requirements for space for commercial and military communications that we do, but they seem to manage. The USA has considerably more television stations in the VHF area, but in addition, they have made good use of the UHF spectrum for additional TV services, ethnic and otherwise. The great number of large population centres in the USA must make a considerable difference in frequency allocation, but they seem to manage! And they have never found the necessity yet to consider the introduction of any Chan-

nel 0 or 5A allocations, nor have I heard of any reports of reducing the amateur bands similar to that in Australia.

ABOLITION OF CHANNEL 0

And so the case for the abolition of Channel 0 is started. In the paragraphs which follow soon we shall see the thoughts and reasons which should be studied first by anyone looking to ridicule them. The 52 to 54 MHz band in Australia for the amateurs is a Primary Service. But this is in name only. Any amateur who dares to operate a transmitter which causes any interference to a television viewer is under threat of closure. A viewer who is operating his station technically correct, and able to pass any inspection likely to be made at Departmental level. At best he could be placed on restricted hours of operation such as outside television hours, etc. Others have to live with their neighbours, and this can become dangerous if the life of certain types of neighbours is aroused, broken windows, rocks on roof and broken windows are not unknown. So for peace, the amateur is likely to stop operating voluntarily. Certainly amateur bands other than 52 MHz can also cause TV, but the risk is not as great when operating HF. If the equipment is suitably enclosed and filtered, but that's quite another story.

COLOUR TV

The average modern colour TV with its coastal antenna lead is helping to keep the ORM problem in a better position, and most CCTV sets are either fitted with UHF tuners or have provision for them to be fitted so it seems ridiculous to put off the day when the UHF TV band should be opened. The almighty dollar in the eyes of some commercial interests seems to take precedence over sense thinking. UHF coverage of the populated areas in each State would be pretty good, with hold signals being the order of the day. Perhaps not entirely relevant but I have noted with interest over the past two years the use of the UHF (470 MHz) two-way radio system on my work vehicle with the base station suitably tuned on a high hill. Just this use is evasion transmitters, the fantastic coverage of a 25 watt transmitter feeding into a 15 cm whip on the roof of the van, and a 25 watt base station to a unity gain antenna. I work over most of the area of the Adelaide Hills and there are very few places, including valleys and townships where it is not possible. I have had a 100 MW s.p. to play with I think the coverage might even be better!

COMMERCIALS SUMMARY

This generally sums up the commercial position as it affects the operations and interference of television stations and viewers. Recapping: Every summer sees considerable interference to Channel 0 viewers due to sporadic E making available stations from other areas on the same Channel, and this also includes New Zealand. With the advent of greatly enhanced sunspot numbers in cycle 21 not only will the ORM persist, but it will be added to by stations from Asia and Pacific areas which will be quite capable of causing as much ORM and perhaps for longer periods. Additionally, it is well known power lines cause interference to radio and TV reception during hot weather, and as this is the time ORM peaks around 50 MHz, Channel 0 will further suffer. In VHS we get enough grumbles from TV viewers who complain of ignition ORM on our Channel 2, what it must be like in Melbourne and Brisbane on Channel 0 I shudder to think!

THE AMATEUR OPERATOR

Having said all that, let us now turn to the more specific situation as it confronts the amateur operator who has lost out badly over the years through the loss of 52 to 54 MHz in the first place, and then by not being able to operate when desired in Channel 0 areas due to TVI. Thanks to as much publicity overseas as we have been able to generate, other countries are slowly coming around to accepting we are operating 2 MHz higher than they do. The lost opportunities for new stations, new home grounds, etc., when conditions are good overseas, those stations will continue to operate around 30 MHz until conditions continue to worsen or stations run out — then they may think of us down here who have been calling in vain.

This article will be concluded in the next issue.

The editorial in CQ of April '78 deals with the age-old problem of interference resulting in controls over amateur and CB equipment. It continues "The frustrating part of the situation is that there is no control at the other end of the interference chain, nor is there an effective means of securing a reciprocity in dealing with interference. What I am getting at is that we (amateurs) have been conditioned to accept the blame in toto for rectifying a situation that cannot be resolved by one side. The manufacturers of consumer devices apparently have been set aside as a privileged class, the consumer has been absolved of responsibility by his retail payment and the culprit is still you and me!"

AMATEUR RADIO — SERVICE

Writing in The Propagator for June '78, the President of the Iltawara ARS, VK2BBG, crystallizes some aspects of modern thoughts, thus—

"The Citizena Radio Service has been with us for some time. For better or worse, it remains a starting point for many future amateurs. How many future amateurs come from this and other areas depends upon the communities awareness of amateur radio. Not only its existence, but its utility. The days of 'we're here because we're here' have gone. We can no longer look down our noses at the uninformed public. For without that public, amateur radio will not survive the upheavals that are taking place with and without the amateur service. For that's what we must carefully cultivate, the service of amateur radio."

"Service is a doing thing. Not a thinking or talking thing. The amount of time available is in direct proportion to the importance of the task. I would suggest that helping the service aspect of amateur radio is as important as tomorrow."

For these reasons, I commend the workings of your club, in WA, the novice course at the tech, and the Wireless Institute CW Emergency Network. Look at them carefully, they are dependent upon your service."

In similar vein (in relation to CB is the editorial in "Zero Beat" of June 1978)—

"One thing seems to have become obvious over the last few months and that is the fact that the combination of CB radio and the novice licensing has opened the way to a spectacular increase in the number of amateurs — providing that advantage is taken of the situation. The biggest danger is that there may arise hostility and lack of communication between the amateurs and the CB organisations. And unfortunately it seems that if this possibly does arise it will mainly be the fault of the amateurs. There are too many amateurs who have the attitude that getting a license was hard for them so why should it be made easier for others. This is selfish and illogical and can only damage the amateur cause. The other harmful attitude is that of looking at CBers as though they were second class citizens. There are a lot of ratings, but don't let us forget that there are also quite a few among the amateur fraternity themselves. Many of the CBers are becoming really interested in radio communication and with sympathetic help will turn into first class amateurs. We have a tremendous potential recruit. Let us make the best of the opportunity."

VK4	VK4RTL, Townsville	52.448
	VK4RTT, Mt. Neabulna	144.080
	VK4RDE, Brisbane	432.480
VK5	VK5VF, Mount Loft	83.800
	VK5VF, Mount Loft	144.300
VK6	VK6TU, Perth	52.320
	VK6TUT, Kalgoorlie	52.350
	VK6TWH, Albany	52.550
	VK6TWT, Albany	52.580
	VK6TWT, Albany	144.080
VK7	VK7RNT, Launceston	52.400
	VK7RTX, Ulverston	144.300
	VK7RTX, Ulverston	432.475
VK8	VK8VF, Darwin	52.300
JA	JAZ3YV, Nagoya	52.980
KG8	KGBXDX, Ocean	50.110
3096	KJ0BKA, Hamden	50.194
21	TI2MA, Costa Rica	50.800
W	W4JARA, Los Angeles, USA	50.801
ZL	ZL1VHF, Auckland	144.100
	ZL1VHF, Waikeke	144.100
ZL2	ZL2VHF, Palmerston North	52.950
	ZL2VHF, Palmerston North	144.300
	ZL2VHF, Palmerston North	144.350
ZL3	ZL3VHF, Christchurch	144.300
ZL4	ZL4VHF, Dunedin	144.000

I note from "Break In" that the Walkato VHF Group in ZL1 area has under construction a 70 cm beacon, which is planned to run on a waste output to an omni-directional antenna with FSK tone in the Upper Hutt area of ZL2 a six metre beacon is being constructed, and will eventually operate on 52.510 MHz. I also note some attempt to being made to arouse a fresh interest in six metres in ZL, which appears to have been very low of recent times, so much so that VK and JA and JA, especially as their Channel 1 TV station has been heard overseas with some frequency. Certainly at any QTH it's a red letter day if you work a ZL on six metres. Without an increase over there on six there is very little likelihood of working ZL on six metres. The band on six is quite often a good pointer to where the MUF is, and a guide to when calls should be on 144 MHz.

DAVINCH WARR

Graham VK9BS sends along some fresh news of activity in the Darwin area, if only to make our mouths water down here with the continuing epic

2-0-78: 52.050 JRI4UW at 1300Z 22-8 52.050 JRI4UW, JHTEWE, JIITRA, JPRN5Z and JAZHMO 1150 to 1255Z. 1-7-78: 52.050 KG6JH, JRI4UW, JHTEWE and JAZOOM 1025 to 1310Z, 4-7 52050 KG6JH, 1100Z 16-7 52050 KG6JH, JAHPU 1110 to 1200Z 17-7 52.050 JRI4UW, JIIBRM, JPSBOD; 52.050 JA to 8 inclusive for 17 contacts, 1053 to 1415Z, KG6JDX at 1135Z, 144.150 JHMTJ, JH80YA, JH80VD, JH80H, JH80SD, JH80VS, JH80VJ, 1250 to 1308Z, 27-7 52.050 KG6JH, 1233Z

2-8-78: 52.050 KG6JH, 1254Z 3-8: 52.050 JH4XJH, JHTEWE, 52.033 JA4MBM, JRI4UW; 144.110 JHTEDE, 1155Z. Six metre contacts between 1145 and 1240Z. 4-8 144.100 JH6PES, JH6WED, JH6PFC, JH6THT and JH6PFF, 1137 to 1154Z; 52.050 JH11ZC, JIITU, JASRYV, JA4MBM, 1200 to 1157Z 5-8 52.033 JA4MBM, 1155Z, 52.050 JHTEWE, 1140Z, 144.330 JHTEWE, 1152Z, 7-8 52.050 JAZHMO, JASVFC, JPDJED, JH6TOM, JH1JHA, JHTEWE, JRI4UW, KG6JH, 1117 to 1210Z, 52.033 JA4MBM, JRI4UW, 1228 and 1237Z, 52.050 40BUT, 1254Z.

Graham remarks "Compared with this time last year conditions have been excellent. As you can see there has been virtually no break in six metre openings, and two metre openings are occurring again! I would predict a very good season for all stations in VK this spring."

"DXpeditions. There are two six metre DXpeditions planned for August. One to Manila for JA amateurs. Call sign 40BUT and operating on 50.195 SSB/CW beacon. The other to KGB Salpan, call sign KG6RD. Some JA amateurs and KG6JH were involved. Running FT25 plus 100 watt linear to S element yagi, beacons 50.110 and 50.210 MHz.

"The following stations in Russia contacted JA stations on 144 MHz. Es 19a year. Vkhodskoye UA0FOL, RA0LAL, RA0AFI, Sakalin UA0FOL, UA0FZ, JAFAM, UA0FBE, Kharkovsk UA0CAA, UA0CAF, UA0CBO, UA0FPA. Opening times were between 0800 and 1000Z and around 0300Z with many openings. I am hoping to organise some 144 MHz sdxs with some of the Russian stations."

"Brian VK8VW and myself checked up on our two metre contacts and he holds the longest distance, and understand he will be making a claim for an Australian Record."

Thanks once again, Graham, for keeping us all up with the news. We certainly do look forward to the Spring openings, and will be keeping a weather-eyes on late evening YEP conditions in the hope 144 MHz may decide to come this far!"

Because of the interest which revolves around these winter time contacts in Darwin, I have this month included the actual call signs of the stations. Graham worked, for those of you who have been making a study of the conditions and areas covered, times and frequencies, this will be of some use to you. It is still interesting to note the 2 metre path still only covers the JA4 and 6 call areas, which are virtually in a north-south path to Darwin over a very small area. If similar paths in the path would exist between the Tokyo area and Adelaide, and contacts may some day be possible to there if the right conditions can be found. We are trying down here!

John VKZ2BD of Tea Gardens, 40 miles north of Newcastle, has written to say he has decided to start up again on six metres after an absence of 6 to 7 years. with a home-brew transmitter feeding a pair of six element yags at 80 feet he plans to eventually run 200 watts RF. He felt a bit disappointed when on 12th August he had removed the transmit driver stages for modification to hear VKZ2AP at Springwood on shortskip, and later strong signals from VK7MT, VK7GJ and VK7ZAM all on 52.050. Just shows even in the winter time you can scarcely afford to have your six metre equipment out of action! Good luck, and thanks for writing, John."

A letter to hand from Ray KX2MB of SM RK, contains a few points of interest as follows. Ray refers to the breakdown of the proposed six metre path, amongst other things, indicated Region 1 has allocated 47 to 58 MHz for broadcasting. He says this is not entirely true as countries like Gibraltar, South Africa and others have allocated a six metre band for amateurs. There are about half a dozen other countries who seem to be leaning towards allowing amateur usage of the future. (Again probably due to increased QRM from other countries. . . SLP)

Ray goes on, "If the present trend of reception of VKZLZ 6 metre signals in USA continues, Channel 0 hasn't seen anything yet in the way of interference, till they start getting TVI from our 6 metre repeater stations, plus those in JA, KH6, KGB, etc. I had a report also of two VK3 stations, which heard in Alaska. ZL TV has been received in Mexico. The aim of SMRK is to be in two or three 6 metres 50 to 54 MHz as a world-wide allocation." Good to hear from you, Ray, we are doing what we can down here about Channel 0.

A SMIRK newsletter received as I write this details an extraordinary amount of 50 MHz activity right throughout the world, but more particularly in the northern hemisphere. It's already incredible what is being worked. QSOs say they are listening for beacons and signals on 6 metres in the UK and are hopeful of being allowed to run a beacon again this cycle. Cyprus beacon (SB4CY) on 50.5 heard 59.9 in UK, 1726Z on 4-6-78. ZS8VP beacon is on 50.030. ZB2VHF, the Gibraltar beacon, is to be re-located right at the top of "The Rock" ZS8VHF beacon is on 50.1 MHz. Scandinavian Radio Amateur Societies are making a strong pitch for 50 to 54 MHz in their WARC 79 petition.

"KGJH runs beacon on 50.120 V80BE also has beacon. Formosa could also be on six with V82 prefix. LK Alaska very active on six, and there is a beacon running at Anchorage, on 50.110. 6Y5RC also has a beacon! There is just so much activity being reported one doesn't know where to start and stop. Bob KB9NQ says six metres will

VHF-UHF AN EXPANDING WORLD

Eric Jamieson, VK5LP

Perth, 6233

AMATEUR RADIO RESULTS

VK1	VK1RTA, Canberra	144.475
VK2	VK2VI, Sydney	52.680
VK3	VK3WI, Sydney	144.018
	VK3RHR, Murrumbidgee	144.328
VK3	VK3RTG, Vermont	144.700

open on trans-continental DX when sunspot count reaches 100, and when QFJ charts indicate an MUF of 42 MHz, the MUF will reach 50 MHz on 10 per cent of the days of the month indicated."

From QRM 1 note VK4ZNC has sent an IC 502 and liner to FK8AB, who is now looking for VK signals, and monitors 62.050 MHz. They also advise the possibility of a six metre beacon in Hobart on 52.475, and when this happens the Leucation beacon will change frequency to 52.470 MHz.

INTERESTING EVENTS OF SIX METRE

David VK5KH has done some research on early six metre activities and the following should be of interest

"25-8-47 On this day the first of the more unusual long distance openings attributed to what later was to be collectively called TEP VK5KL in Darwin worked W7AGS/KH6 Pearl Harbor, distance of 5335 miles. On 27-8-47 another 'first' when XE1KE Mexico worked LUBDO in Temperley Argentina, distance 4900 miles. On 7-10-47 W8UWX California had a partial contact with J8AAO Oklawaha, but not a confirmed contact.

"Meanwhile, the North-South American path was being hotly worked 14-6-47 'first' USA to South America contact, W5FSC Houston, Texas, to OAAAE Lima, Peru. On 16, 18, 17, 18, 19 and 20 September many Mexico to Argentina contacts were made all within 1700 to 3000 miles.

"Yet another 'first' on 12-10-47, W7AGS/KH6 worked W5, W6 and W7 the first time six metres had been worked to mainland USA from Hawaii.

"At the time propagation was thought to be almost completely accounted for but with openings at later than expected times (for F2 layer that is) and constant Trans-equatorial paths changed the situation. The theory was now known was largely formulated in the late 1950s and early 80s. However, MUF on these paths were only reported to 80 MHz (1.6 times previous days F2 MU) Some predictions as to the MUF of night-time single hop TEP were, until recently only put to about 100 MHz. It is now thought that something like 280 MHz is more in order, but the report is that the MUF is now more North-South path as frequency is increased. Because of this I think all efforts should be made to get back 80 to 52 MHz so as to place us on even terms with other 6 metre countries and make co-ordination of higher frequency experiments possible

"On 27-10-58 'first' Japan to USA contact, JA1UAH is still active and has been working recently from VK6 at least to K5EDX. It is interesting to note that by May 1958 JA1UAH had worked 16 USA States.

"With the opening of 80 to 54 MHz to VK6 in late 1957, it became possible to work JAs without trying splits from 56 MHz etc. During 1958 there were 5000 JAs and about 10 per cent were on six metres. By March 1959 VK6AG had worked 332 JAs. Also 430 JAs had worked USA during 1958. One notable contact JAFJU to VETKW on 23-11-58.

"Also first 14 to mainland USA 6 metre contact occurred 19-5-58, Bob VK4GND to W6JLI. Other calls from both sides involved on the same day included VK4HD, VK4ZAZ, VK4ZBF, VK4XJ and K5ERG, K6PXT K6RNQ, K5MMT and W6RLB and W6WVC. This 0452Z to 0500Z Band also opened on 20-5-58. By March 1959 there were having more luck with 14 band being open on February 1, 2, 20, 21, 22, 23, 28 and March 19 and April 16. There were still being contacts to 2L after they were shifted to 52 MHz in 1959. And VK3ALZ worked JETPU on 1-5-59."

Many thanks, David, for that interesting roundup. Incidentally, David VK5KK, and his father, Keith VK5SV, worked at least 13 different stations during March and April 1978, all but one except contact to K6BDO on 1-4, which was the first K6B to VK6 contact that we know of. There were two night time TEP openings on 13-4 and 19-4. Calls were made on 144.1 and 144.175 with 32 elements pointing north, but no results.

By the time you read these notes there should have been some interesting six metre contacts from Australia to other lands, if the previous paragraphs are followed. I am sure that it is necessary for me to remind VHF operators to listen and call on the band. But do please take off

enough time to write to me and report what you have worked and heard. Keep a good ear on 50 MHz because that's where most of the action will be.

Nothing outstanding has occurred on two metres apparently as nothing has arrived on my desk in the way of reports. But keep your ears on at that band, too, from September through to at least April or May next year, interesting contacts could result.

During September I shall be making a journey to Western Australia and hope to meet up with Tony VK3BV in Kalgoorlie, Peter VK5ZDY in Perth, and of course all the boys in Albany (Don't forget to take your camera to VK5, Eric, and send me some photos of the VHF activity in that area.—Ed.) Maybe I shall have something to report to you from the west on my return. I will be making other arrangements for this column for the November issue, which is normally prepared at the end of September. I won't spoil your surprise by telling you.

Closing now with the thought for the month: "Life is like a gridiron — whether it grinds one down or polishes one up, depends entirely upon the material one's made of!"

73. The Voice in the Hills.

LETTERS TO THE EDITOR

Any opinion expressed upon this heading is the individual opinion of the writer and does not necessarily coincide with that of the publisher.

The Editor,

Dear Sir,

My thanks to Geoff Wilson VK3AMK for his letter in August AR, which exactly expresses my own sentiments, with the possible exception of the words "particularly in Western Victoria". Here in VK5 we have our problems, too, with a Channel 5A transmitter brought into service this month.

Where Channel 5A and Channel 0 are concerned, competency can spell nothing but disaster. We've lost 27 MHz, but 2 metres is a horse of a very different colour. Here we MUST take off the kid gloves and show the authorities that this is where we make our stand that we WILL NOT be forced off the 2 metre band by TV transmitters operating contrary to International frequency allocations.

On another subject, congratulations to most participants (including the many Novices) for the high standard of operating in the recent RD Contest. As usual, however, there were still too many examples of the annoying practice of "frequency jumping". You know how it goes. You call CQ and are fortunate enough to find a queue waiting for QSOs. You've worked a couple and then someone jumps in and calls the station you've just worked. You are forced to QSY and start going all over again, with the rest of the stations waiting to contact you, just left for dead.

Oh, yes, we know about skip, and on the DX bands you don't hear all the locals, but you don't have to listen on a frequency for long to know what's going on there. We are all human, and perhaps all a bit thoughtless at times, but it's so easy, and so much more friendly, to jump in with a quick call and "see you down 2". And what could be more gratifying in the turmoil of a contest, than to hear the question "Is this frequency in use?"

Finally, in reply to Eric Trebilcock and various other letters for and against continuing CW in Amateur exams.

The real cry of CW QSOs will never be known to the Amateur who regards morse as an obstacle to be overcome to obtain a licence, and who does not then persevere to become really proficient.

If all new licence holders and potential licence holders could only realise what a satisfying and exciting form of communication CW operating really is, I feel sure they would be determined to master the art. For an art is what it is, and, sadly, a dying art.

Conservation is a household word today. With Morse Code almost a thing of the past in all commercial spheres, who will conserve this art if it is abandoned by Amateurs? Is not the Amateur Service the logical place to preserve this traditional communication on medium for the pleasure of future generations?

Yours faithfully,

E F Davies VK6ED

10 David Street East,
Springwood 2777,
25th August, 1978

The Editor,
Dear Sir,

In August issue the Federal President expressed the opinion "It was felt that the examination standard is becoming more consistently at a level considered as suitable for entry into amateur ranks." I regret that I must express quite a contrary opinion, as the last Novice theory examination paper was passed by Novice candidate and had completed only a small portion of the course provided by the Club with which I was associated. In short, it was possible for candidates to obtain Novice qualifications with only the bare minimum topics covered and with no training in the important items such as transmitters, aerials and — MOST IMPORTANT — problems of interference.

Furthermore, the use of the word 'consistently' implies that there has been a series of Novice papers of approximately equal standards — which is far from being true. It appears that the principle behind the Novice examining still remains at "It doesn't matter much what we test them on as long as we make up 50 questions." THIS IS NOT GOOD ENOUGH!

There should be some valid basis for determining the content of Novice theory papers. I suggest that we should expect Departmental testing to determine —

- that successful Novice candidates can "get on the air" without undue problems to themselves;
 - that they should be able to set to their stations and operate without problems to other licensed Amateurs on or near the Novice segments;
 - that they should be able to operate without causing problems to other users of the radio spectrum — which will include testing on TVI, BCI, harmonics, parasitics, etc.
- Accordingly, there will be some questions and topics which may be classed as "unworthy" insofar as they will help the examiners to assess in terms of the principles stated. However, we ask far too many questions of the "unworthy" category, which bear no relation whatever to the obvious aims of the testing process. I must, therefore, maintain that there is a long way to go before satisfactory Departmental examinations may be regarded as 'suitable' in terms of the President's statement.

Yours faithfully,

R. C. Black VK2YA.

4 Van Diemen Crescent,
Burnie, Tasmania 7320
15-8-78

The Editor,
Dear Sir,

I wish to thank those concerned with requesting and granting the extra space on 80 metres for Novice use.

73s.

Fred Reid VK7NFR

The Editor,
Dear Sir,

I have just found out that some amateurs have been working 6 metre DX on 80 MHz, which is outside the Australian allocation of 52-54 MHz.

This I find very disturbing to me, knowing these amateurs are deliberately working out of band, and which is very irresponsible on their part. It will not improve our relationship with the P and T Department and the Government, especially during the Channel 5A crisis. I on a keen 6 metre operator and believe we should try to get 50-52 MHz back. Amateurs outside the Channel 0 service

area should be allowed to operate on 50 MHz any time, and those who live in places where there is Channel 0 to operate outside the Channel 0 transmitting hours.

I myself would love to work JAA, etc., on 50 MHz — but legally those amateurs who do not operate on 50 MHz, wake up to yourselves and stick back up to 52 MHz, otherwise you will do more harm to the amateur radio service than good.

Lionel K. Curling VK3NNM.

8 Carinya Road,
Mt Colah, NSW 2078.
29th July, 1978.

The Editor,
Dear Sir,

I am concerned about the news and correspondence in AR and other places that there is the possibility of Television Channels 0 and 5A being used more widely in Australia. Like most of your correspondents I am concerned about the fact that deficiencies in the design of many television receivers could lead to an increase in TVI from amateur operation in the 8 and 2 metre bands.

However I am also concerned at the negative attitude expressed in the comments that we are actually one of the two bands. Surely, if the use of Channels 0 and 5A is extended that should present a challenge to amateurs to solve the technical problems that may arise. Have the commercial operators abandoned the 70-88 MHz segment because it is adjacent to Channel 2, or the 144-174 MHz segment because it is adjacent to Channel 8? I think not.

If we amateurs go on behaving like "appliance" operators and don't use our technical abilities to tackle the problems that come along, we can be sure that there are many commercial interests who would be quite happy to take over our bands and solve them for — not us — but themselves. And we continue to go crying to the Government or desperate amateur lawyers sure that they would be quite content to hand over the bands to people who could profitably use them.

By all means let us point out the real problems to the authorities but let us also be positive in our approach and be prepared to solve them ourselves.

Yours sincerely

Robert V. Barringer VK2ZIB.

The Editor,
Dear Sir,

WHY DO WE NEED PUBLICITY?

The days of just sitting back in silence holding our principles in one hand and our virtues in the other and expecting miracles to happen have gone. The days of justification in terms of social, economic and political areas have risen above the less but still important technical considerations. However, linked to all these interacting considerations are their relationship to public relations. When we talk of publicising amateur radio we usually refer to the few brave people who, like all the rest of us have a daily job, a family to look after and lots of other activities to get involved in apart from amateur radio.

In the United States a full-time paid staff is supported by the ARRL which makes possible a wide range of avenues from contacts into the radio, TV, film and press industries through do-it-yourself PR kits such as how to be a success when you're being interviewed over your local TV or radio station, how to write an appealing article for your local paper which the editor won't be able to refuse, etc.

In Australia the greatest handicap is that such an important area as publicity, our show-piece to the general public, is totally lacking, because the only activists in this area are the few keen unco-ordinated volunteers.

Hardly anyone works in the mining industry, yet we know "they are the backbone of our country" and when the general public must make the final decision one way or another — it will be PR — the showcase of the mining industry which will have had an important effect.

How much public support can we expect from the general public as a result of the Channel 5A

and Channel 0 dilemma? If the public don't even know we exist then one would expect not very much as opposed to the appealing proposition of immediate community service programmes over existing VHF TV equipment.

A nationwide call for a response one way or the other could be seen in this way:—

People can vote for the Amateur Service if they have never heard of which advertiser that UHF is best and that VHF would disrupt some of their activities versus the TV Service which want the most economical currently existing VHF system.

The results tend towards the VHF system.

Take another case where the general public knows that a thing called Amateur Radio exists, that it's a hobby made up of individual people like you and I who get into a whole variety of radio activities.

If this much is not known then there is nothing to say that the new TV system must be on UHF.

However, if the public can identify with hobbyists who are being threatened, then although VHF is possible, people could favour the not too long term variable UHF proposition in favour of both services emerging unscathed.

This theoretical view of publicity outlines the concept of "What's in a name?" Basically it's this — if people don't know you by your name they are more likely to support a concept they do understand.

The TV Service may have no more significance to a person than does Amateur Radio. For example, the non-member may not be interested in the proposed migrant TV service and he may not be interested in becoming an amateur hobbyist. Which way would such a person vote? There is nothing intrinsically correct about either VHF or UHF. Any technical ideal is only achievable when economic and political considerations are met first — this is surely the case of the introduction on a short range system being introduced on to 11 metres, although a balance was struck in the adoption of a transition period to UHF for CB.

Why, we could ask, are so many well known former CB advocates, having won the battle, now taking out amateur licences? Were not the elements which attracted them to amateur radio now, present before CB was legalised?

The answer is publicity. Publicity is letting people know what amateur radio is all about, people are listening, they like what they are hearing and that is why the great interest in the hobby.

During the campaign to legalise CB there was very little amateur publicity but lots of CB publicity. CBers regarded themselves as hobbyists, and amateurs were seen as more of the professional class of person.

What's happening today? The CBer who finds out about amateur radio is identifying it as a hobby which he or she can become involved in.

What about the publicity scene. Basically we are still at the level of attracting the existing hobbyist. Amateur Radio Action now being available on the westward seeks out WIA and non-WIA members as well as newcomers, especially from the CB area. While both AR and ARA are doing excellent work in their areas, the general public is still largely untouched.

The question now arises in the goal of publicity to turn every person into an amateur? Of course it's not, its simple task is to reach the whole community in presenting a basic showcase which reflects what amateur radio is — to let the world know of its existence so that when community support is required we don't need to wish we had 14 million amateurs, but we are pleased that 14 million people know who we are.

Yours faithfully,

Sam Voren VK2BVS

2 Griffith Ave., East Roseville, NSW 2089

The Editor,
Dear Sir,

The "Sugar Coated Oscar" in AR for July was interesting and I have a printout for my OTH, but I am still having trouble with "time". Living in

amateur isolation it is hard to get information. Are your Oscar 7 predictions in GMT and how do I convert to local time at this OTH for this day? Can you recommend a book or source of information on this subject that is all time systems around the world [exact]

Many thanks.

Yours faithfully,
Ron Goodwin VK2BKN

Editor's Note The charts are in GMT and to convert to EAST add 10 hours (8 hours when daylight saving is introduced). The book "Oscar from the Ground Up" should provide you with most of the information you require (available from Dick Smith stores and most technical book shops).

Bob Arnold VK3ZBB is also forwarding you some further items under separate cover.

AROUND THE TRADE

MICROWAVE MODULES

Amateur Electronic Imports, PO Box 160, Kogarah 2217, NSW, distributors of the well known M-wave Modules have available the MM432/100, 100 watt, 432 MHz linear power amplifier.

This solid state 432 MHz linear power amplifier is intended for use with any existing 432 MHz equipment having an output power of 30 watts. When used in conjunction with such a drive source this linear amplifier will provide a power output of 100 watts minimum.

The inclusion of the latest state of the art power translators (each of the final translators being rated at 145W dissipation), guarantees a highly reliable and ultra-linear unit which is suitable for all modes of operation (SSB, FM, AM, CW, RTTY and TV).

The amplifier utilises recently developed matching techniques which allow safe operation on even when improperly sub-tuned antennas — to 50 per cent overdrive and a supply voltage of 15V.

Also available is the microwave module's dual range 432-434 MHz and 434-436 MHz converter. The extra range being for amateur satellite reception. The converter is intended for use with either a 28-30 MHz or 144-146 MHz receiver to produce a high receive capability for satellite terrestrial communication.

AEI HORN ANTENNA, 18 to 40 GHz

Scalar have announced that American Electronic Laboratories have introduced horn antennas, which provide moderate gain, circularly polarized performance in the 18 to 26.5 GHz and 26.5 to 40 GHz bands respectively.

A data sheet on AEI models H-1626 and H-1636 horn antennas is available from Scalar Distributors Pty Ltd, PO Box 48, Kilsyth 3197, Victoria.

Dick Smith Electronics, an Australian distributor for Yeosu amateur radio equipment, is pleased to announce stocks of the new range of Yeosu antenna band vertical whips, specifically designed for mobile use.

They can be bought as a complete set, or purchased individually, and include a very rugged gutter mount base and individual whips for all HF bands. A short 2 metre 1/4 wave stub and a combination 1/4 wave 6 metre/5/8 wave 2 metre antenna complete the set.

(Cat Nos D-4160-D-4118 refer)

LATEST BWD CATALOGUE

BWD Electronics Pty Ltd have released their latest Shortform Catalogue, which includes a general range of oscilloscopes, oscillators, power supplies and the BWD MINI LAB and describes one of their latest new products, the BWD 540701 DC-100 MHz Oscilloscope/Video Line Selector Dual Instrument Package.

BWD have also released a new oscilloscope camera, Model 7000. All the BWD products are

11 Shire Street,
West Wyalong, NSW
August 9th, 1978

The Editor,
Dear Sir,

illustrated extensively but more detailed technical information is available on individual instrument data sheets if required. Also available is information on their wide range of power supplies. A comprehensive six page data sheet covers all specifications which are fully detailed for ease of selection.



BWD Multi-Turn Inductor

Catalogues are available from BWD Electronics Pty. Ltd., Miles Street, Mulgrave 3170, or PO Box 325, Springvale, Victoria, Australia 3171, Phone (03) 561 2868, or from their authorised national or international representatives.

AMATEUR BAND ANTENNA COILS

The reliable REYO range of multiband antenna coils are now available in Australia through sole distributor, Scarlat Industries Pty. Ltd.

Specifications:

Power, 2 KW PEP (minimum); Weight, 6 ounces (max.) per coil, size 1.8 in. dia. (max.) x 5.5 in. long (max.); Absorption, Waterproof Coating; Strength, 300 (min.) Tensile Strength; Corrosion, All Metals, aluminum, including screws, nuts, washers, to resist interface corrosion; HI-Q, Optimum Form Factor on 20y

REYO coils are actually parallel coil-condenser combination designed to resonate in the various amateur bands.

Coils are wound with aluminum wire on threaded polystyrene forms. Rates of length to diameter plus low loss material results in a high Q assembly. Because of the high Q and impedance at resonance the coils act as effective inductors in the band in which they are resonant.

Using the KW-40 coils as a 5-band antenna approximate antenna dimensions



On 40 metres the two 32 foot lengths provide a conventional dipole with the resonant coils acting as inductors.

On 75 metres the coils act as a loading inductor and with the extra 22 foot lengths form a dipole on 75 metres.

On the higher frequencies, with the values chosen the antenna is 3/2 waves on 20, 5/2 waves on 15 and 7/2 waves on 10.

Price Class \$30 to \$35.

Full details are available from Scarlat Industries Pty. Ltd., 19 Shelley Avenue, Kilsyth, Vic 3137.

SCALAR APPOINT WA AGENT

The SCALAR Group is pleased to announce the appointment of EVERETT INTERNATIONAL PTY LTD, 17 Northwood Street, Leederville, W.A. 6007, Phone (092) 81 5500, Telex AAN 92811, as their exclusive agents in Western Australia.

This includes the complete range of SCALAR communication antennas, screened enclosures and other products associated with radio frequency interference suppression.

A comprehensive range of the Company's mobile and field tuneable base station antennas are held in stock in Perth.

Telex communication between the two companies assures an efficient and instant information and ordering facility for frequency conscious, for special antenna systems, and for RFI suppression information.

CATIVE STORAGE MEDIA

AEI's recorder computer interface series RCI accepts wideband analogue data, digitizes, stores, then delivers it to your data processor at compatible rate upon command. The RCI digitizes the input video signal using an internal, high speed analogue-to-digital converter and stores this sampled data in a memory with a standard capacity of 1.44 million words. This data can then be transferred to the minicomputer (or micro, or main) or data processor at a slower data rate, compatible with disk memory or other storage devices.

The RCI digitizing data is normally fixed at one value, the standard rate being 20 MHz. This rate can be decreased in discrete steps to allow increased storage time for narrower bandwidth input signals.

Further information from Scarlat Distributors Pty Ltd., PO Box 48, Kilsyth, Victoria 3137, Australia.

CONTESTS

Wally Watkins VK2ZRW/NCU
Box 1085, Orange 2900

CONTEST CALENDAR

October:

- 7/8 VK/ZL/Oceania DX (Phone and RTTY)
- 14/15 VK/ZL/Oceania DX (CW)
- 13/15 VK/ZL/Oceania DX (CW)
- 14/16 Maniaba QSO Party
- 21/22 RSGB 2 MHz (SSB)
- 21/22 Jamboree on the Air
- 28/29 QO World-wide OX (Phone).

November:

- 4/5 RSGB 7 MHz (CW)
- 4/5 ARRL CW Sweepstakes
- 18/19 ARRL Phone Sweepstakes
- 25/26 QO World-wide OX (CW)

CONTEST CHAMPION TROPHY

This trophy has been donated by Peter Brown VK4PJ, primarily to acknowledge the important part played by high scoring stations in Amateur Radio contests, and also to provide added incentive to entrants.

RULE 1

The Radio Amateur, who is a member of the Wireless Institute of Australia, and holds a VK prefix and who, under the scoring arrangements of Rule 2, obtains the highest aggregate of points in the contests nominated by the Federal Contest Manager, shall be declared Contest Champion for each calendar year.

RULE 2

The Amateur obtaining the highest score in a nominated contest shall receive 10 points towards the trophy, the next highest scorer 9 points, and so on with the person in tenth place receiving one point. Where a contest has several sections, viz., CW, Open and Phone, then points will be allocated in each section, however points can only be claimed for one section of each contest.

RULE 3

An Amateur holding a Limited and Novice licence can accumulate points under both call signs, but only once in each contest.

RULE 4

The Contest Champion shall hold the trophy for a period of twelve months.

RULE 5

The Federal Contest Manager shall each year, at the time of announcement of the name of the new Contest Champion, nominate the succeeding contests applicable to the trophy, and together with such rules as he considers necessary, publish this information in Amateur Radio together with the list of all previous holders of the trophy.

NOMINATED CONTESTS FOR 1978

- 1. 1978-79 Hoas Hill VHF/UHF Memorial
- 2. 1979: John Moyle Memorial Field Day
- 3. 1979: Remembrance Day
- 4. 1979 VK/ZL

It will be eligible for the trophy a minimum of three contests must be entered. No formal application need be made as scoring will be done automatically by the Federal Contest Manager.

WESTLAKES NOVICE CONTEST

WESTLAKES NOVICE CONTEST

Westlakes Amateur Radio Club again this year announces a Contest for all Novice and Full Licence radio amateurs. The Contest will take place from 0800 GMT 9th to 0700 GMT 10th December, 1978.

OBJECTS OF THE CONTEST

To encourage contest working between amateur stations in Australia, New Zealand and New Guinea during a 24 hour period with special emphasis on contacts with Novice and Radio Club stations.

RULES: STATION ELIGIBILITY

Only stations in VK, P29 and ZL call areas may enter. No station outside these areas is permitted to be worked or enter a log. Except for Radio Clubs, no multi-operator working is allowed. VK2s may work VK2s, VK3s may work VK3s, as well as stations in other areas of VK, ZL and P29.

CONTEST BANDS

All the 80, 15 and 10 metre Novice allocations may be used but Novice operators must observe the frequencies and band limitations outlined in their licences. No cross band operation is allowed but cross mode operation is allowed. Contacts may be Phone or CW.

SCORING: LICENSED OPERATORS

For contacts with Full Call stations, 2 points per contact.

For contacts with Novice Call stations: 5 points per contact.

For contacts with Radio Club stations: 10 points per contact.

SCORING: LISTENERS

Novice to Novice contacts, 5 points.

Full Call to Novice or Novice to Full Call: 2 points.

Full Call to Full Call: 2 points.

Contacts in which a Radio Club is involved 10 points.

CALLING PROCEDURE

Stations should call "QO Novice Contest" on Phone or "QO CW" on CW. Stations may be worked only once per mode.

EXCHANGES

Telephony stations should exchange (S) five digit numbers in order commencing with -001. The two numbers indicate signal strength and readability, e.g. 5 by 9 equals 59001. CW stations should exchange (S) six digit numbers in order commencing with -0001, e.g. 59001. Listener stations should log both the call sign and numbers in an exchange. Radio Club will add 'Q', e.g. 59023 Q.

CONTEST CLASSES

- Class A Novice/Full Call Phone.
- Class B Novice/Full Call CW.
- Class C Novice/Full Call Open.
- Class D Listeners.

MINIMUM OF CATEGORY TIME

Logs should contain details of Station, time, band, mode, No. heard, No. read, points tally for section, together with this declaration: "I have operated my station in accordance with the licence requirements and the rules and spirit of the contest." This declaration should be signed and dated. A front cover for the contest log should contain Name of operator and call sign, address, class for which entry is made, stations worked (a) Phone, (b) CW, points claimed (actual) and total points claimed.

Logs should be sent Certified Mail to: Contest Manager, Westlakes Amateur Radio Club, PO Box 1, Terahs 2284, by closing date of 15th January, 1978. Late entries may not be accepted.

The decision of the Contest Committee is final and no correspondence will be entered into regarding the Contest.

CONTEST AWARDS

Certificates for the highest score in each State will be awarded for the following:

- Novice Phone, Novice CW, Novice Open
- Full Call Phone, Full Call CW, Full Call Open
- Radio Club Phone, Radio Club CW, Radio Club Open
- Listener Phone, Listener CW, Listener Open

ENTRIES

A miniature replica Certificate will also be issued to all stations and listeners who take part in the Contest indicating their participation.

AMATEUR RADIO ACTION

IS THE NEW GENERATION AMATEUR MAGAZINE



SUBSCRIBE NOW!

DON'T MISS OUT on your copy of *Amateur Radio Action*. There's only one way to be really sure that you will receive each and every copy of *Amateur Radio Action* — and that's by enrolling on our subscription lists. And it won't cost you any more than buying one at the news-agent. That's right, we are offering 12 issues

for only \$12 post free.

Simply fill out the coupon below, enclose a cheque/money order/postal order for \$12 and you will be put on our subscription list to receive the next 12 copies of **AMATEUR RADIO ACTION** through the post.

Please put me down for 12 editions of *Amateur Radio Action*, starting NOW!

RATES: Within Australia and surface mail overseas:
\$12.00

Air mail to New Zealand and Papua New Guinea:
\$A29.40

Air Mail to USA and Europe: \$A46.20

Herewith enclosed cheque/postal note/money order
to the value of: \$

Name

Address

Postcode

Post to: *Amateur Radio Action* Subscriptions, Box
628E, Melbourne 3001.



CPU-2500R — 2 meter FM transceiver



Yaesu brings a Central Processing unit to VHF communications

Computer technology is brought to bear in the revolutionary CPU-2500R 2 meter FM transceiver from YAESU. Sophisticated circuit design and renowned YAESU quality workmanship are yours today with this exciting new transceiver from YAESU — where performance comes first!

Features

■ Heart of the CPU-2500R, a central processing unit (CPU), performs complex control operations while you just flick a switch.

■ 600 PLL synthesized channels are available in 5 kHz steps over the entire 2 meter band. A photo-interrupter frequency selection technique is used, and full 6 digit frequency display is provided.

■ The CPU scanner moves you instantly up or down the band, and will search for a busy or clear channel, as desired.

■ Four memory channels available for simplex or repeater operation, and additional memory channel may be used for split of up to 4 MHz. The CPU will scan just the four memory channels, if you wish.

■ Choice of standard microphone, with up/down scanner controls, or the keyboard microphone. The keyboard mike allows up/down scanner control, remote selection of dial or memory frequencies, and contains a two-tone encoder for autopatch or control purposes.

■ A subaudible tone guarded squelch encoder/decoder is an available option, for silent monitoring of busy channels.


■ A dual gate FET front end lets you pull in weak signals, while the transmitter puts out a solid 25 watts.

■ Convenience features include "busy channel" and "on the air" lamps, a memory backup feature, and manual or automatic tone burst selection. Your CPU-2500R is protected against high VSWR and reversed power supply polarity.

■ Ease of operation is ensured by careful selection of positions for controls and switches. Engineered for performance, using the latest technology, the CPU-2500R is truly a first-class set. YAESU promises you nothing less!

For a leaflet containing all specifications and full-color illustrations, contact Bail Electronic Services.

CPU-2500R

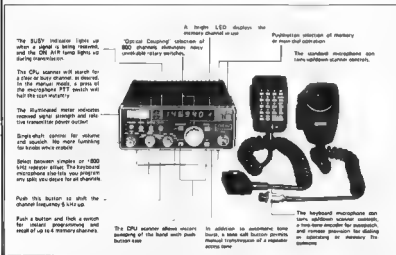

Our years of handling and specializing in this equipment have enabled us to build up a fund of knowledge and technical experience backed by a comprehensive range of spare parts and service facilities. We don't just sell a set, our concern extends throughout the life of your equipment.

Contact us for details of other Yaesu equipment plus the accessories required to complete your station.

All equipment from Bail's carries a 90-day warranty and complete service back-up. Prices and specifications subject to change without notice.

Bail ELECTRONIC SERVICES

FRED BAIL VK3YS
JIM BAIL VK3ABA

60 Shannon St., Box Hill North, Vic., 3129.
Ph. (03) 89 2213

Yaesu Agents in Australia since 1963

Radio amateur equipment from B.E.S. also sold by —

W.A.	Radio Communication Services, H. R. PRIDE, 26 Leeshart St., Coburg, 6132	Ph. 450 4370 Ph. 21 7838
S.A.	WILLIS TRADING CO., 428 Murray St., Perth 6000	Ph. 283 2155
T.A.S.	FARMERS RADIO PTY. LTD., 20 Stanley St., Plympton 8836	Ph. 44 4773
	G. T. ELECTRONICS, 131 Westbury Rd., South Launceston 7280	Ph. 44 5000
	J. D. ELECTRONICS, 64 Wentworth St., Launceston 7250	Ph. 34 6912
	PRINS RADIO, 123 Argyle St., Hobart 7000	Ph. 587 1650
N.S.W.	Aviation Tronics, STEPHEN KUHLE, 104 Foley St., Mascot 2020	Ph. 624 2591
	Amateur & Novice Comm. Supplies, W. E. BRODIE, 23 Delray St., Seven Hills 2147	Ph. 69 2040
	DIGITRONICS, 186 Perry St., Newcastle West 2302	Ph. 21 2125
	RIVERCOM, Sid Ward, 8 Copland St., Wagga Wagga 2680	Ph. 79 6179
Q.L.D.	H. C. BARLOW, 80 Charles St., Allkennell, Toowoomba 4614	Ph. 57 6830
	MITCHELL RADIO CO., 58 Allkennell Rd., Allkennell 4010	Ph. 81 2924
A.C.T.	QUICKTRONIC, Jim Bland, Shop 11, Altrecr Cr., Phillip 2606	Ph. 82 2864

bail



DOES YOUR ANTENNA TURN IN THE WIND?

DOES YOUR CONTROL UNIT
'CUT-OUT' AFTER ONLY A FEW REVOLUTIONS?



... then step-up to a RELIABLE EMOTO ROTOR.

Bail Electronics are pleased to announce ...
... an exciting range of ANTENNA ROTATORS
by EMOTO ANTENNA Co. of Japan



We have been in the business long enough to know your requirements for a first class antenna rotor, and we have gone "over board" for the EMOTO range. There are many brands of antenna rotors some of them completely unsuitable for the majority of amateur applications, and for this reason we do not stock them.

Most likely your present antenna rotor will turn your antenna and hold satisfactorily, but it just will not hold it stationary under strong wind conditions, i.e. YOUR ROTATOR LACKS SUFFICIENT BRAKE TORQUE, the ability to hold the antenna still whilst a gale is blowing. HERE IS WHERE THE EMOTO SCORES. Take a close look at the comparison figures

EMOTO FEATURES
• ROBUST DESIGN
• HEAVY DUTY STAINLESS HARDWARE
• 100V SUPPLY TO MOTOR REDUCES VOLTAGE/POWER-LOSS

COMPARISON OF ROTOR BRAKE TORQUE FIGURES (kg./cm.)	
CDE model	Torque 1,182
CD44	4,025
HAM-2	1,560
EMOTO model	4,060
103 LBK	1,560
502 CXX	4,060
1102 MXX	10,000

above. Then compare the prices of all the rotors and you will have to agree that the EMOTO 103 LBK, EMOTO 502 CXX and EMOTO 1102 MXX are the best value. Finally EMOTO ANTENNA CO., is not a new company. They have been making rotors for many years. Have no fears about this being a new and untried product!

Universal antenna couplers

Extremely important, especially with modern all-solid state transceivers, is the maintenance of a very low SWR to avoid destruction of costly high-power P.A. transistors. An antenna coupler enables precise adjustment with almost any antenna.



SW. or CO-BX.

HC 500A — 160-10m, up to 500w pep
(radio able — not illustrated)
HC 2500 — 160-10m, up to 2.5kw pep
HC-75 — 80-10m, up to 75w pep
HC 250 — 80-10m, up to 200w pep
KW E-ZEE Match — 80-10m, up to 400w pep
FC 301 Yaesu — 160-10m, up to 500w pep

Now an addition
to YAESU'S range
of measuring instruments ...

QTR-24
24 hour
World
Clock



QTR-24

Yaesu has now made an addition to their already well known range of measuring instruments. It is the QTR 24 a 24 hour World Clock. With a glance at the time in any principal city or time zone can be simultaneously coordinated with local time on a 24 Hour basis. The QTR 24 is powered by a 1.5V dry cell which has a normal life of approximately one year. No amateur or SWL station could be complete without one.

Our years of handling and specializing in this equipment have enabled us to build up a fund of knowledge and technical experience, backed by a comprehensive range of spare parts and service facilities. We don't just sell a set, our concern extends throughout the life of your equipment.

Contact us for details of other Yaesu equipment plus the accessories required to complete your station.
All equipment from Bail's carries a 90-day warranty and complete service back-up.

JAS7879-1

bail

ELECTRONIC SERVICES

FRED BAIL VETYS
JIM BAIL VK3ABA

60 Shannon St., Box Hill North, Vic., 3129.
Ph. (03) 89 2213

Yaesu Agents in Australia since 1963

Radio amateur equipment from B.E.S. also sold by —

WA	Radio Communication Services H R PRIDE 26 Lockhart St Como 6152	Ph 450 4379
	WILLIS TRADING CO 429 Murray Street Perth 6000	Ph 21 7809
SA	FARMERS RADIO PTY LTD 20 Stanley St Plympton 5038	Ph 263 2155
	G T ELECTRONICS 131 Westbury Rd South Launceston 7200	Ph 44 4773
	PRINS RADIO 123 Argyle Street Hobart 7000	Ph 34 6912
NSW	Aviation Tooling STEPHEN KUHIL 104 Robey St Mascot 2020	Ph 667 1650
	Amateur & Novice Comm Supplies W E BRODIE 23 Dalry Street Seven Hills 2147	Ph 624 2681
	DIGITRONICS 186 Parry St Newcastle West 2302	Ph 68 2040
	RIVERCOM Sid Ward 9 Copland St Wagga Wagga 2650	Ph 21 2125
QLD	H C BARLOW 82 Charles St Albionville Townsville 4814	Ph 79 5178
	MITCHELL RADIO CO 59 Albion Rd Albion 4010	Ph 57 6830
ACT	QUICKTRONIC, Jim Bland Shop 11, Altrea Crt, Phillip 2606	Ph 81 2664
		82 2664



EMONA electronics

Head Office, Sales & Service: 23 MIDGE ST., HAWTHORN 3121. Ph. 398 6370
City Branch: ROOM 280/661 GEORGE ST., SYDNEY 2000. Ph. 212 4815
Cable Address: EMONA Sydney. A.N. CALL 398 6378

MAIL ORDERS: Box K21, Haymarket NSW, 2000, Australia
WRITE, PHONE OR CALL IN!



**!AVAILABLE SHORTLY!
THE NEW DIGITAL H.F. TRANSCEIVER**

DenTron DTR-1

WRITE FOR FULL SPECS.



**FRG-7
only
\$325**



**DR-48
only
\$466**

IFDK **MULTI Palm II**

**NEW
RELEASE!**

2m FM POCKET TRANSCEIVER

SPECIFICATIONS:

Transceive Frequency Range 2 MHz in 144-148 MHz,
Transceive Channels 8 Channels Mode of Operation FM
Antenna Impedance 50 Ohms unbalanced, BNC connector,
Power Reqs. 12V DC (Negative Grounded)
Power Consumption Transmits 300 mA, Receives 100 mA,
Stand-by 25 mA Weight 1.03 lbs (470g) Repeater Offset
± 600 kHz, Modulation on Variable Reactance phase
modulation Max Deviation on ± 5 kHz Microphone
Condenser Microphone, Receiver Double conversion
superheterodyne (1st IF - 16.9 MHz, 2nd IF 455 kHz),
Sensitivity -4 dBu (IN 30 dB), Audio Output
Maximum 0.3 Watts Attachment: Rubber duck
antenna, Nicad battery pack, DC cable with
cigarette lighter plug, Carrying strap



\$229

ALSO AVAILABLE: • **MULTI 800D** **IFDK**
• **MULTI 2700** **\$744** • **BIGEAR TYPE 1** **\$694**
• **BIGEAR TYPE** **\$361**

GREAT PRICE REDUCTION ! ! ! !



MLA-2500

DenTron Radio has packed all the features a linear amplifier should have into their new MLA 2500. Any Ham who works it can tell you the MLA-2500 really was built to make amateur radio more fun

- ALC circuit to prevent overloading
- 160 thru 10 meters
- 1000 watts DC input on CW, RTTY or SSVT Continuous Duty
- Variable forced air cooling system
- Self-contained continuous duty power supply
- Two EIMAC 8875 external anode ceramic metal triodes operating in grounded grid
- Covers MARS frequencies without modifications
- 50 ohm input and output impedance
- Built in RF wattmeter
- 117V or 234V AC 50-60 hz
- Third order distortion down at least 30 db

~~\$1300~~ NOW **\$1190**

New FULLY LEGAL ANTENNA ROTATOR



MEDIUM-SIZED HAM ANTENNA
ROTATOR — FU 400.

With approved power supply **\$139**
Mast clamps **\$11**
Stay bearings **\$32**
Constructed for long trouble-free operation,
200 kg vertical weight capacity
Extra heavy duty disc brake that prevents
wind-mixing

**INQUIRE ABOUT OUR SPECIAL
ANTENNA/ROTOR PACKAGE !!**

ANTENNAS GALORE

AT
SPECIAL
PRICES

AUSTRALIA'S LARGEST SELECTION OF BEAM ANTENNAS:
3, 4, 5 ELEMENT YAGIS, Y-QUADS, Y-QUADS, etc.

Wilson — SY-1, 10-15-20m, 4 elem Beam **\$339**
Wilson — SY-2, 10-15-20m, 3 elem Beam **\$279**
Cushcraft — ATB-34, 10-15-20m, 3 elem Beam **\$289**
Hustler — 4 BTV w/80m Resonator, Vert Antenna **\$130**

SPECIAL COMMUNICATIONS SYSTEMS

RELAX AND ENJOY CW — Go RTTY Emona's Silent Way!

NEW INFO-TECH RTTY EQUIPMENT:

Model 75 RTTY to Video Converter **\$447**
Model 150 RTTY Keyboard **\$467**

NEW INFO-TECH MODEL 2001

A complete system that converts Morse, RTTY and ASCII to Video, using Fairchild F-8 Microprocessor Technology! A good receiver and video monitor are all that is required! **\$868**

NEW INFO-TECH MODEL 3001

A Microprocessor controlled, stand alone keyboard that generates Morse RTTY and ASCII codes. **\$584**

ROBOT MODEL 400 SSTV CONVERTER

\$898

LUNAR

HF3-100L2 Linear Amplifier **\$245**
Bi-Linear VHF Mode's **\$250**
20-432 MHz Low Noise Pre-amplifier **\$42**
In Line Switching 2m Pre-amplifier **\$58**
Oscar Box "J" Dual Freq. Oscar 8
Down Converter **\$99.90**

MIZUHO

SX-50 RF Pre-amplifier **\$84**
SX-1 Pre-selector **\$63**
DX-1000 Coupler Generator **\$56**
KX-1 Coupler **\$59**
MX-1D Marker **\$39**
Pre-selector for DX-555P

DENTRON ANTENNA TUNERS

MT-2000A **\$299.50**
MT-3000A **\$447**
180-10AT **\$186**
w/ MON TOR **\$104**

IONOSPHERIC PREDICTIONS

Len Poynter VK3ZGP/NAC

QSP

VHF ACTIVITY IN THE USSR

The magazine "Radio" for April 1979 carries reports of VHF and UHF activity in the USSR.

On 144 MHz activity is high with some SSB signals. DX is being worked using meteor scatter, aurora, and by tropospheric ducting. The following is a list of stations with their best distances worked. Many contacts being to other European countries.

Station	Best DX
UA3MBJ	200 km
UP2BBC	1989 km
UK3MAV	2520 km
UA3LBO	1600 km
UA3WGU	1400 km
UA3PBY	875 km

On 432 MHz the list is smaller but good activity is reported using the same sorts of propagation as on 144 MHz.

Station	Best DX
UA3LBO	1360 km
UR2EO	1160 km
UA2FCH	1125 km
UR2HD	1038 km
UP2BBC	880 km

On 1215 MHz a contact of 785 km is reported by UP2BBC to DL7YCA. The power used was 60 watts. A 1.2 metre dish was used as the antenna.

The station UP2BBC appears in all the listings and must be a keen VHF/LHF worker.

The notes in "Radio" are always full of dogma and the VHF/LHF scene must be very active.

AUGUST 1978 AOCF EXAMINATION

The August AOCF examination caused many candidates to scratch their heads. Indeed many of the less well prepared candidates had a worried look.

P. and T. have managed to produce some new questions and re-worded others. Half the questions were new. A manoeuvre calculated to upset the parrots.

The exam paper is coming on to the target with questions related towards current usage. Full marks for putting some thought into it.

Finally, for those candidates still arguing about the answer to question 9 the correct answers are as follows:

- (a) (i) 12 amps.
- (ii) 720 watts
- (b) 10 ohms

You didn't even need a calculator to work it out.
VK3AJL.

POSTAL AND TELECOMMUNICATIONS

DEPARTMENT





AMATEUR OPERATORS' CERTIFICATE OF PROFICIENCY

August 1978

SECTION M (THEORY)
(Time Allowed — 2½ hours)

NOTE SEVEN questions only to be attempted.
Credit will not be given for more than SEVEN answers. All questions carry equal marks.

- (a) Describe, with the aid of a circuit diagram, the operation of the final output stage of a single-sideband type transmitter employing a pi-coupled tuning unit.
(b) Describe how you would tune a transmitter using pi coupling, to correctly load a coaxial-cable coupled antenna.
- (a) What do you understand by the "Fazek-electric effect"?
(b) Explain, with the aid of a sketch the construction and theory of operation of a crystal microphone.
- (a) Aided by a sketch show the RF voltage and current distribution on a transmission line when (i) correctly terminated, (ii) terminated in a short circuit.
(b) Explain the meaning of the terms (i) standing-wave-ratio, (ii) current node.



LEGEND
 FROM WESTERN AUSTRALIA
 FROM EASTERN AUSTRALIA
 BETTER THAN 50% OF THE MONTH, BUT NOT EVERYDAY
 LESS THAN 50% OF THE MONTH
 PREDICTIONS COURTESY P.S. SNEYD
 ALL TIMES UNIVERSAL (UTC) (GMT)

4. Using circuit diagrams to illustrate your answer, explain the principles of simple and delayed automatic volume control in a superheterodyne receiver.
5. (a) With the aid of a sketch, describe the construction and theory of operation of a moving-coil permanent-magnet type of meter.
(b) Describe where such a meter may be used and list any advantages and disadvantages associated with its use.
6. (a) With the aid of a diagram describe the operation of a circuit in which use is made of a Field-Effect-Transistor (FET).
(b) What particular advantage has been attributed to the FET type?
7. (a) With the aid of a circuit diagram describe the theory of operation of a voltage regulated power supply in which a voltage regulating diode (zener) is used to obtain regulation.
(b) Draw the forward and reverse current versus voltage curve for a typical zener diode and indicate the point on the curve where the 'zener effect' commences.
8. (a) Explain the fundamental differences between frequency modulated and amplitude modulated signals.
(b) With the aid of a circuit diagram, explain the theory of operation of the discriminator stage of a receiver capable of reception of frequency modulated signals.
9. (a) Three resistors R_1 , R_2 and R_3 of 20, 30 and 60 ohms respectively are connected in parallel across a 120 volt DC supply. Calculate —
(i) the total current drawn from the supply and
(ii) the power dissipated by R_1 .
(b) Show how an additional resistor R_4 may be connected in the circuit described in (a) to reduce the voltage drop across R_2 and R_3 to 80 volts without affecting R_1 . Calculate the value of R_4 .

DIVISIONAL NOTES

Here are a few notes compiled from available sources

Members might like to know that figures from the AR address labels control totals for September AR show how the WIA membership is expanding —

Division	Full members and pensioners/ life members	Total members
VK1	103	154
VK2	1220	1550
VK3	1233	1685
VK4	589	768
VK5	594	829
VK6	478	489
VK7	319	295
	4567	5718

Compare these with the statistics shown on page 34 of July AR, remembering that a number of the 137 students possess call signs, some Associations have call signs but have not yet notified the details, and a small number of financial members have no labels because their ARs had been returned to sender and no fresh addresses had been notified. Also the statistics in July AR included double call signs and family members, which are excluded from the control totals because no address labels are printed for those.

A together 1276 new members have joined the Institute so far this year.

VK1
Four new members for September AR, bringing the total for the year to 46. So far, only 14 previous members are still unaffiliated.

VK2
At the July meeting 35 new members and 2 clubs were accepted into the Division. At the August meeting 45 new members were accepted. So far 57 previous members from last year have not renewed their membership. This highlights the

effectiveness of the reminder system used by the Division.

REPEATERS

There are 12 repeaters operational in VK2 on 2m, one due to be operational late in 1978, two new ones under test, one more under construction and 4 projected. Applications are on hand for 2 ATV repeaters, one RTTY repeater, one 70 cm repeater and one 2m repeater. One repeater is planned for SSTV working. The VK2 September MRS says if anyone has had experience in modifying the Philips UHF CB unit for 70 cm use, Plans are in hand to establish a frequency and time standard 144 MHz beacon in the Upper North Shore area of Sydney. The State Repeater Committee are also looking into beacons for the 70 cm, 23 cm and 3 cm bands and suitable frequencies in the ranges 432.4 to 432.45 MHz, 1297.2 to 1297.29 MHz and "holes" available on 3 cm.

CONSTITUTION

The Division now has a new Constitution, which will become final after submission to the Corporate Affairs Commission.

69 new members began with September AR. However, a total of 173 failed to renew for the year.

As in the other States, Convention time is upon us. There are the Eastern Zone Convention at the Penrynville Country Club on 19th November and the Western Zone Convention at Ballarat on 19th-20th November (all Europe Stockade on the 19th).

VK3

Coming event November 4th and 5th, 1978 — Victorian Western Zone Convention. Details from Ballarat Amateur Group, K. Hughes, 14 Ophir Street, Sebastopol 3355. Ph. (053) 35 6135.

VK4

35 new members processed for September AR. However, 58 members from last year still remain unaffiliated in spite of reminders having been despatched.

Conventions in Queensland include Queensland AR Convention in Brisbane, 16th-17th October, and the display at the Hobbies Exhibition from 13th-19th November.

VK5

An input of 67 new members for September AR. Only 41 failed to renew this year, thus justifying the expense and work done in sending out reminders to unaffiliateds.

VK6

A total of 17 new members inputted for September AR, but a total of 18 did not renew for 1978 despite reminders.

VK7

Seven new members this month but there were 11 dropouts for the year. Altogether 58 new members this year, which gives a good gain.

The Divisional Box Number remains as 1010, Leunceston, but the Northern Branch now uses Box 275, Leunceston.

The Tasmanian Divisional Bulletin has ceased publication. Divisional news will be incorporated in CRM.

The S. Branch beam beacon frequency will be 52.457 MHz, hence the M. Branch beam frequency will be shifted to 52.470 MHz.

The Tasmanian Convention will be in Hobart, 4th-5th November.

Short contributions by and from Divisions would be welcome.—Ed.

ALARA

AUSTRALIAN LADIES' AMATEUR RADIO

This month we proudly present Norma VK3AYL as the next star in our series of famous YLs. Norma will probably need very little introduction to VK3 operators and is well known in other States as well.

Norma was the guiding force behind the formation of the original ALARA in 1975, and has put a great deal of time and energy into the organization ever since. As well as having been the Founding President, she continues the job of Secretary and Editor (author, typesetter, addresser, mailer and all-

round producer) of the ALARA Newsletter. A thankless task, but I take the opportunity to put our thanks in writing at this stage.

ALARA's other arm of contact, the 80w Monday sked, also owes its existence largely to Norma's efforts, along with those of Myra VK5WV (and, of course, the participants).

Norma hails from "Up North" (at least as far as the Murray) and takes off on periodic home-ward excursions every now and then. She became interested in amateur radio at an early age and gained her licence without much trouble. She has since proceeded to gain a Science Degree at Melbourne University and a D.P.Ed.

Norma now lives in Melbourne where she is a teacher of maths and physics during the week and an enthusiastic amateur pilot in between times. (Such is her enthusiasm that Norma would probably say she is a pilot who teaches now and then.) Norma's teaching talents have been put to excellent use in amateur radio as she is the Novice Course instructor at the Institute Tuesday night classes (with considerable success).



Norma VK3AYL in WICEN exproles.

All round, such a talented lady that the article has made it superfluous to include a planned article on ALARA activities — Norma has a hand in everything anyway. Altogether, it would be true to recognize Norma as a very active YL who has made an outstanding contribution to amateur radio in general and to ALARA in particular.

Kate Curran

MAGAZINE INDEX

Syd Clark, VK3ASC

RADIO COMMUNICATIONS June 1978

The Dagrammatic Representation of Radio Signals: A Simple 10 GHz Receiver with Transmitter Option, Modifications to the Yaesu FR50B Receiver: An Afterburner for the GST02 FM Block Box: The University of Surrey AMSAT Telecommand Centre: Visiting the USA as an Amateur Radio Operator: Observing Radio Satellites.

SHORTWAVE March 1978

Antennas — The Weak Link, Amateur Radio — Communication or Technology, or Both?, Communication and DX News.

RADIO 28 February 1978

Marine Communications — Past, Present and Future.

RADIO 25 March 1978

Pictures by Radio — The Instant QSL, Converting the Heath HW-17A 2 Metre Transceiver from AM to FM, CG Bermuda Triangle.

RADIO 25 April 1978

Radiation Patterns of Long Wave Airials, In Support of unity.

73 February 1978

Inexpensive ECG Encoder, What Are They Showing on SSTV?, Build a Better Phone Patch, Drawn TRACW Review, Shoestring Switching for CW, Relaying for Fun and No Profit, Build a 3 1/2 Digit DVM, Clean Up Your Touchtone, The Tempo 2020,

The Trailer Light Solution: Repeater Procedure; Tighten Up Your S&T; QRP Hints; Breakdown: Impedance: Custom Made Thermistors: UHF Propagation: Tune-Up Aids for the Blind: KIM-1 Can Do It: A Secret Weapon for Road Racers: Looking for a Micro: Flandish New QUBIC Program: Put an ELF in Your Keyer: Try HCAI; Rad; See Q, See Q: Measure Periods with Your Counter; Super Siren; CB to 10; Coming of Age: Put a Sorey in Your Shack; How to Compete with an HT; SASE: A Ham's Life Cycle: The Extreme Basics of Antennas: The \$5 Magnatic Mount; Versatile Transistor Tester; Autopatch Digil Suppressor; Surplus Adventures: TS-700A Calibrator; Keeping the Zap Out of the Shack: Painless Touchtone Adjustment; The Overkill Stall Wamer; Try 220 Volt Line It; How To Displace 300,000 Megawatts; Can a Miniature Antenna Work?; The Op Amp Encyclopedia.

75 March 1978

The New Improved "Best Keyer Yet!": The Powerful Brains of America: How to Cut the Costs of Power Supplies: The Quicker Slicker Transistor Tester: You, Too, Can Go Digital: Old Receivers — A Hidden Gold Mine: Old Rigs Can Live Again: Novices, Paddle Your Way to Happiness: How Many of Is That Capacitor, Really? Exorcising Power Supply Demons: Meet the Plastic Wonder; Don't Drive the Excitement of QRP: Is Your Repeater Up-to-Date?; 1250 MHz — Use It or Lose It: New Protection for Your Car; The Great Cover Up: The World of Tone Control: Solve Those Parallel Problems; At Last An FRI Free Computer: Another Approach to the ASCII/Beudot Headsche: Programming: Coil Design: Outstanding Computer Bargains Exposed; Do Biorthymia Really Work?; From CB to Amateur Radio: How Much Power Does It Draw?; Surprisingly Low Cost Lab. Supply: Wireless Monitoring for the Bionic Ham: I Need a Contact: Flash Project for Camera Fiends: Kerchunk Counter: The Solar Powered Ham Station: A Cheaper Cap: The Go Pro HT Model: A 2m Antenna for the Perfectionist: Are You Afraid to Build?; A Brass Horn for X-Band: A Cheapie's Circuit Board: Good Grief, not the 225 Again: Avoid an Overvoltage Catastrophe: The Amazing Zener Sweeper: How to Use a Varactor: Can a Diode Replace a Relay?; Shock the Car-Burgle.

CG MAGAZINE April 1978

Exploring Cape Cod: A Message from the Publishers: Log-Periodic Antennas in VHF and UHF Amateur Service: Selection of Contest Operators Using Biorthymia Charts: The Federal Communications Commission: The Q Key: 1977 CG WW DX (CW) Phone) Contest: High Claimed Scores: A "Hot" DX Transmitter 1938 Style: The RSK-253 Receiver: The Yassu FT-302 Transceiver: Using Ribbon cable to Make Your Own Cols: QRP: The Ultimate Achievement — DXCC Milliwatt: The Quality Factor: Computers and SSTV.

CG May 1978

DXpedition to Montserrat: An RTTY Primer: Forgotten Accessories to Improve Receiver Performance: The Wave Antenna: Wireless Telegraphy at the St. Louis Exposition — 1904: CHU: Service Canadian de L'heure: 1977 CG WW DX (CW) Contest: High Claimed Scores: Solid State QRP VFO Transmitter for 7.14 MHz: Fashions in Microphones: AC2RN — A Tale of Chins: Amateur Radio on Yachts: Antennas: Delta Loops, Multiband Antennas: Antenna Height vs. Performance.

CG June 1978

A Simple Phone Patch: A Scanner for the GLS Synthesizer: AMSAT-OSCAR 8 Successfully in Orbit: Base Loading a Simple Vertical Antenna for Two Band Use: Determining the Electrical Insulation Dielectric Stress: The TRS-80 Microcomputer: An Ohmmeter Pot-Pourri: How to Update Your Ham-M-Rotor: A Plug-In Supply for the Curtis K1T Keyers: Synthesizer Tricks: Heathkit 5200 Series Test Instrument: Reflected Waves and Mismatched Loads: KADDT Monster Qud: VK3XU Anti-Noise Bridge: W7UO Multiband Antenna: J01UEA Mini-Loop Antenna: SSTV in VK and ZL Land: The Advantages of Starting as a Novice.

HAM RADIO March 1978

Synthesized High-Frequency Transmitters: Weak Signal Communications — A New Approach: PI Network Design: Transmitter Matching Networks: Introduction to Operational Amplifiers: Operational

Amplifier Updates: Applications for High-Frequency Hybrid and Complex: Antenna Gain Measurements: Impedance Matching by Graphical Solution: Transmission Line Calculations with the Smith Chart: Numerical Smith Chart.

HAM RADIO April 1978

Advanced Electronic Keyer: AMSAT-OSCAR-D: 432 MHz GaAs FET Pre-Amplifiers: Simple Paddle for Electronic Keyers: Spectrum Analyzer Tracking Generator: Battery Charger for Portable Operation: Modifying Linear Amplifiers for Full Break-In Operation: Designing Matching Networks: Overtones: Crystal Oscillators: Correcting Repeater Interference: Testing Power Tubes: Microprocessors: Micro Computer Interfacing: Improve Audio Quality for VHF-FM.

QST May 1978

A Modular Control Unit — Just for Repeaters: Transmitter Design: VHF Coverage for Collins S-Line Receivers: A DoppleSCAT: Sunspots and the HW-18: An Audio Continuity Tester: OSCAR in the Classroom: Marconi Station Reborn on Cape Cod: QRP — It's a Lifesaver: Results, 44th APRIL November: Sweepstakes: Rules, 1978 IARU Radiosport Championship: Parts Out, Hertz In: June VHF QSO Party: Field Day Results: Field Day Came Early to New Mexico: Results, Frequency Measuring Test: The Fox Control Committee Boo-Boo: FCC Bans 10 Metre Amplifiers — Commissioner White Dismisses in Part: Call Me Anything, but Don't Call Me "Good Buddy".

QST June 1978

Low Noise GaAs FET UHF Pre-amplifier: A Low Cost Dot-Memory Keyer: Transmitter Design: Predicting Radio Horizons at VHF: The ABC Active Filter: Producing Weather Satellite Pictures at Lower Cost: A Low-Cost Burglar Alarm for Home or Car: Build This Novice Four Band Vertical: Basic Antennas Concepts: How Safe Is Your Ham Shack? RF Heating in the Ham Bands: Your Code Speed: QRP 20.

BREAK-IN April 1978

The Importance of Making Experimental Records: Raincliff 1977: Annual Reports and Remits: Getting the Best Out of Your SSB: A Regulated Charger for 12V Motor Cycle Batteries: A Modification to the Welling Motor Drive Conversion Receiver: Modification to the Tuning Drive of the FRG7 Receiver.

BREAK-IN May 1978

E & W School Re-union: A Bloodshot View of VHF Conversion: IARU: "CB" The Contentious Bone — Food for Thought: Wide Band Bakin Design Without Ferrites: Transformer Ratings — Rule of Thumb Method: The BC221 Frequency Meter — A Solid State Conversion: Long Period Timing Circuit Using Non-Electrolytic Capacitors: A Tape-Recorder Mixer.

AWARDS COLUMN

Brian Austin, VK5CA

P.O. Box 7A, Craters SA, 6162

WAVE

The Worked All VHF Award (WAVE) is a long established award. Confirm two-way Amateur radio contacts in each of the eight VHF call areas on 2 different bands for a total of 16 contacts. The same station may not be worked more than once, regardless of band. All contacts must be made from an area within a radius of 150 miles of each. All contacts after 1-1-1939 count.

WACAN

The Worked All Canada Award (WACAN) is basically a continuation of the WAVE award, except that all nine provinces must be worked in addition to Newfoundland, Labrador and Yukon or Northwest Territories, for a total of 24 different stations. Newfoundland and Labrador contacts must have been made since 31-3-1949.

QSL cards are required unless you can provide a certified list from your club president, or a notary.

The fee for WAVE is \$1 or 10 IRCs.

For WACAN, the fee is \$2 or 20 IRCs.

An exception is for those who already hold WAVE and are applying for WACAN. The fee is then only \$1 plus the additional eight QSL cards. Send your application, fee and cards to —

Northern Amateur Radio Club, VESNAR,
PO Box 146,
Station A,
Willowdale, Ontario, M2N5S8,
Canada.

(VRN)

For those who are trying for the WAS (ARRL), the following may be of assistance:

FIRST CALL AREA includes the States of Connecticut, Maine, Massachusetts, New Hampshire, Rhode Island and Vermont.

SECOND CALL AREA includes the States of New Jersey and New York.

THIRD CALL AREA includes the States of Delaware, Maryland, Pennsylvania, and the District of Columbia.

FOURTH CALL AREA includes the States of Alabama, Florida, Georgia, Kentucky, North and South Carolina, Tennessee and Virginia.

FIFTH CALL AREA includes the States of Arkansas, Louisiana, Mississippi, New Mexico, Oklahoma and Texas.

SIXTH CALL AREA includes the State of Colorado.

SEVENTH CALL AREA includes the States of Arizona, Idaho, Montana, Nevada, Oregon, Utah, Washington and Wyoming.

EIGHTH CALL AREA includes the States of Michigan, Ohio and West Virginia.

NINTH CALL AREA includes the States of Illinois, Indiana and Wisconsin.

TENTH CALL AREA includes the States of Colorado, Iowa, Kansas, Minnesota, Missouri, Nebraska, North Dakota and South Dakota.

Other calls, including Hawaii and Alaska.

If any of you have information about, or rules of, awards which may or may not have been published in AR, please send it to the writer at the above address. With the large increase in the number of amateurs these days, the chances are that they will be unknown to the newcomers, and I have to fill this column somehow!

IARU NEWS

The Republic of Djibouti has been recently admitted as the 154th member country of the IITU.

The Grenada ARC and the Assoc. des Radio-Amateurs du Senegal were elected to membership of the IARU. The total is now 101.

On 8th October the 4th triennial conference of the IARU Region 3 Association will open in Bangkok. IARU Nica will be represented by the IARU President, Noel Eaton VK3CJ and the IARU Secretary, Dick Baldwin W1RU. The WIA will be represented by the Federal President, David Wardlaw VK3ADW, and the Exec. Vice-Chairman, Peter Wollenden VK3ZPA. The Secretary of the IARU RS Assoc. is David Rankin VK3QV/VW1RH. Also attending will be Michael Owen VK3RI, one of the four Directors of the Association.

This will be the last occasion for Region 3 amateur societies to meet together prior to WARC 79.

The 6th SEANET Convention will be held in the Marco Polo Hotel in Singapore from 10th to 12th November. Details from the hosts, Singapore AR Tx Society, Box 2728, Singapore 1, or by joining in the SEANET held daily at 12.00Z on 14320 KHz.

During October/November David Wardlaw and Michael Owen will be attending the CGIR Special Preparatory Meeting in Geneva. This is a most important event designed to finalise, as far as possible, the technical material for WARC 79. The amateur service should be the subject of discussions if the recommendations by the CGIR international study groups are adopted that the service should come within the terms of reference of CGIR Study Group 8. At present the Amateur Satellite Service is considered by Study Group 2.

HAMADS

- Eight lines free to all WIA members.
\$2 per 3 c m for non-members.
- Copy in typescript please or in block letters to P.O. Box 150, Toorak, Vic. 3142.
- Reprints may be charged at full rates.
- Closing date: 1st day of the month preceding publication. Cancellations received after about 12th of the month cannot be processed.
- QTH means the advertiser's name and address are correct in the current WIA Radio Amateurs Call Book.

FOR SALE

Diana RF850 AC/DC RF Processor, 6 dB gain, crystal filtered, new, \$130; also Krasco 23 ch. CB Trax, suitable for 10m conversion (ref. August AR) or 80m converter, completely aligned and tuned, complete with mike and mobile mount, etc., excellent condition, \$75. Kevin Cooke VK3NPG. Ph. (051) 57 1462 A.H., (051) 52 4632 Buz.

Drake 88R-1 Comm. Rx, as new, in original package, \$240; Lafayette HA 63A Comm. Rx, 0.5 x 10 m. Bt. hand-operated, needs alignment, all new tubes, \$50. VK3ZFN, Ph. (03) 560 8415 Buz.

Yaesu FT101B, few months old, as new in box, \$745. Ph. (03) 467 3223 A.H.

Trio JWR80 Rx, factory fitted band-passed with 2m converter, and FM det., \$100; 6m and 2m converters, \$20 each; 23 and 40 ch. 11m rigs converted and operational on 10m, base and mobile. Ring or write for details. Gavan VK3ZNC/VK3NIC, QTHR. Ph. (051) 47 2368.

SBTV Fax/Slow Digital Converter, W6MKV 200 w. 15, full frame section, grey scale generator, video invert, 14 grey shade capability, \$150. Stan VK3BHZ, QTHR. Ph. (060) 71 7244.

Pye CD-1 Stereo Cassette Deck, twin VU, bias shift, chrome/normale select, pause, DIN, etc., very little use, surplus, \$120, negotiable; circuit and instructions. VK1GB, Box 788 Canberra City 2601. Ph. (062) 47 3296 or 64 1965.

FT7E, with AC and DC power supplies, external VFO, hand book, complete original, \$400. VK2BDT, QTHR. Ph. (048) 21 5036.

Icom 982 2m hand-held DC or AC operated transceiver, converted, \$160; FT2 auto 2m AC-DC FM transceiver with xtal, Simplex 40-50-81 repeater, R2-R3 R44 and reverse repeater R44, with mike and cables, \$175. ONO; 3 new QRG03/12 valves, 1 only QRG03/20 valve, new, never used, offers. VK4AGQ, QTHR. Ph. (073) 72 4101.

Yaesu FT101B 100W HF Trans, with AC and DC power supplies, 9 xtl freq. external VOX unit, speech processor and mobile bracket, complete station, \$550; Ken KP202 2m FM TR, 40, 50, with nicada and charger, with 2 antennas, \$180. Jim Hendrickson, Ph. (059) 624 1698 Buz.

Icom IC-23 2m Fm Trx (CTC B12-12 final), mobile mount and manual, Ch. RPT-3, 3, 4, 5, 6, 7, 8, Anil. 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 31, 32, pre-amp, \$80. ONO; Pye Fm Ranger mobile and bracket, ch. 40 and R3 and mains P3, \$25; AR-2 five-alphabets wave 2m Ringo, \$25; Swan 17 (conv. to 20, 40, 80) and Swan P3, \$100; Command sets (3), BC-4508, 4548, 4538, R3X and rack, \$30; 7 x 17 in. rack cabinet, \$20 "NCSB" cabinet, \$20. Assorted chassis. VK3VW, QTHR. Ph. (059) 21 2238.

Yaesu PRG7 Receiver, perfect condition, \$280. ONO. Alan VK3NQD. Ph. (03) 314 0344 Buz., (03) 398 4853 A.H.

Collins 75B-1 Hamband Rx, excellent condition, 80-10m, with 110-240V transformer and some spare tubes for the Rx, \$360. Phil Jury, L3053D. Ph. (053) 560 9215.

New 23 Ch. AM/SSB Transceiver, converted to 10m, 4 ch. fitted (21, 22, 22A, 23) as per band plan, 6dB, VK7FT, QTHR. Ph. (002) 44 4321 A.H.

Astro 200 Taser, mint cond., \$650; Swan MB40A solid state 40m transceiver, 100W PEP, unused, \$250; Kenwood TR2200A, rep. 1 to 8, 40 and 50, nice batteries and charger, as new, \$200; Denton super tuner, 1 kW, built-in balun, \$260. VK3BHF, QTHR. Ph. (02) 86 6249.

Yaesu FT-7 HF Mobile Transceiver, complete, unmarked and genuinely new, with manual, leads and unused accessory plugs, mike, \$500. VK3P7, QTHR. Ph. (049) 43 1308.

Linear Amplifier Heathkit RA14 with HP24 AC power supply, 1000W PEP, 10V/6m, \$400. VK3BCV, QTHR. Ph. (03) 648 4775.

Drake T4X2 Tx, SSB/GW, 160-110m with Drake AC-4 PSU, Drake R4C Rx with noise blanker and 14 accessory 500 kHz frqs. Included, Drake base station, Dynamic mic., Drake WA wattmeter, brand new in factory cartons, \$1,795 complete. VK2JO, PO Box 508, Bondi Junction 2022, NSW. Ph. (02) 36 7756.

Halliforders FPM-380 250 watt PEP input, SSB/CW HF 80-110m solid state HF Tascu, 240V and 12V DC PSU built in, complete with deluxe 12V DC mobile mount and Dynamic mic., similar to FT101EE, but made in USA, excellent condition, Halliforders owner's manual included, \$485. VK2JO, UO Box 505, Bondi Junction 2022, NSW. Ph. (02) 36 7756.

Transceiver, Plessey PTR178, 220 to 400 MHz, 12 ch., 28V DC, hybrid, excellent cond., \$75; Hidaka VS20H 2m 5/8 ground plane in original packaging, unused, \$35; Voicet constant voltage transformer and heavy duty bridge rectifier, 16.5A at 35V DC (trans. sec. could be tapped), \$80. VK3BVF, QTHR. Ph. (03) 93 1538.

Communications Rx, 150 kHz to 30 MHz, 5 bands Lafayette HA60A, as new cond., perfect working order, FM det. added, \$100; 4-500 52 MHz valve SSB linear 400W PEP out for about 19W drive, \$120. VK4ZNC, QTHR. Ph. (07) 205 2121.

Yaesu FTDX 401 HF Transceiver with matching speaker, mic, low pass filter, Katsumi mic, compressor model MC-225, all with English manuals, package deal, \$450. VK3PH, QTHR. Ph. (053) 30 1460.

48 ft. Self-supporting Tower, 12 in. x 18 in. tr. sections, built-in ladder, plus 25 ft. length high tensile pipe, suit hvy beam or Christmas tree array, commercial mfg., exc. cond., \$300; Collins calibrated stainless steel portable multi-dipole 637T, all freq., mint cond., \$130. VK2AAK, Box 954, Parramatta. Ph. (02) 635 1320.

GDO UHF Megacycle Meter, 420-940 MHz; by Measurements Ltd., with power supply, \$100; Collins 31225 external VFO, wattmeter, phone patch, speaker, control unit, \$450. VK2AAK, Box 954, Parramatta. Ph. (02) 635 1320.

CQ Magazines 1960-69, almost complete, several years '73, 25 cents each; assorted tech books on elect. engineering, agriculture, flying, etc., from \$1 each; bound set G.E. Reviews, 28 vol., 1922-1960, exc. cond., collector's item, \$150 each. VK2AAK, Box 954, Parramatta. Ph. (02) 635 1320.

Kenwood TS220 with DC power supply and CW filter, complete with handbook and original packaging, \$575. VK3KK, QTHR. Ph. (03) 469 4200, after 6 p.m.

Trio TR2E 2m AM Transceiver, good cond., with manual, triple conversion, dual VFO, 240V AC, 12V DC, \$100. ONO. VK2AHE, QTHR. Ph. (049) 2 42313.

Swan 350 and 230XC power supply, in perfect working order, recently overhauled and line-up done, \$265, plus freight. VKAAB, QTHR. Ph. (07) 383 3296.

FRQ7, six months old, \$275; Realistic SK180, VGC, \$125. Will deliver to Melb. Dave. Ph. (03) 743 6932.

WANTED

Hammarlund Super Pro Rx Primary Aerial Coil, 200-400 kHz (result of lightning strike) and matching AC PSU, will consider wrecked chassis for spares; CQ magazines from about 1950 onward; Halliforders TR 5 and SX series (WW2 models), HF and VHF. VK3AQ, QTHR. Ph. 327 4862.

SILENT KEYS

It is with deep regret that we record the passing of —

Mr. J. A. REEL VK4JL
Mr. W. M. PETERSON VK5BL
Mr. R. H. HILDER VK2AFT

Viewfinder Camera, Sanyo VCM 2000A or similar, Stan VK3BHZ, QTHR. Ph. (062) 71 7244.

Connections from AT5 or TU Tuning Units, Command Tx, etc.; also carrying case for Ken KP 202. VK3AHG, QTHR. Ph. (03) 288 2024.

VFOing in good condition, and also extra crystals required for FT-75B. Details to H. V. Lonsdale, 2 Balfour Street, Newborough, Vic. 3825.

Tower and 3 Band Qued or Yagi, Price, etc., to VK3BYR, QTHR. Ph. (03) 785 2792.

Johnson Matchbox or KW EZY match antenna tuning unit with facility for balanced twin feed and coax. feeders. VKAAB, QTHR. Ph. (07) 351 3296.

EVENTS

Capricornia Amateur Radio Festival. Conducted by the WIA Central Queensland Branch. Interests for everyone. Date: 18th-17th September. Place: Rockhampton. Details: Write Sec., Box 486, Rockhampton 4700.

STOLEN

Stolen from TAA Flight Section Newcastle NSW, my Yaesu FT101B, serial No. 10033934, on Sunday, 24th May, mint condition, no alterations, packed in original carton, with mic. and accessories. VK4UR, QTHR.

TRADE HAMADS

8-160 Microprocessor Kits from Bloch — We supply by retail mail or road transport a wide range of 8-100 microprocessor kits and bare boards from 8000 kits for 8080A and 280 CPU, memory, I/O, motherboards, power transformers, card cages, etc. Good prices on chips, programming services for 2708 EPROMs, software development and assembly. Write for details now to The Micro Shop, Box 207, Gawler, SA 5118. Mail orders only.

RLC Cards, Log Books, Contest Log Sheets. Send a 30c stamp for samples and prices to Linda Luther VK4VV, PO Box 498, Nambour, Qld. 4560.

ADVERTISERS' INDEX

AMATEUR ELECTRONIC IMPORTS	38
AMATEURS PARADISE	7
AMATEUR RADIO ACTION	47
AUSTRALIAN SOUND AND SIGNAL RESEARCH	27
BAIL ELECTRONICS	38
BAY CITY ELECTRONICS	27
BRIGHT STAR CRYSTALS	37
BWD	9
CHIRNSIDE ELECTRONICS	40
CUSTOM COMMUNICATIONS	28
DELTA COMMUNICATION SERVICES	27
DICK SMITH ELECTRONICS	27 and Oscar Insert
ELMEASCO INSTRUMENTS	68
ELMOA ELECTRONICS	60
GFS ELECTRONIC IMPORTS	37
GILCO	37
GRAHAM STALLARD	27
HAM RADIO SUPPLIERS	18
HATFIELD CRYSTALS	2
Mrs. L. LUTHER	64
MICRO SHOP	64
MIDLAND ZONE	64
SCALAR INDUSTRIES	30
SIDERAND ELECTRONIC IMPORTS	6
SIDERAND ELECTRONIC SALES	8, 9
SPECTRUM INTERNATIONAL	7
TRIO-KENWOOD	56
VICOM	14, 15
WILLIAM WILLIS & CO. PTY. LTD.	16

**Photographs
Required
NOW for AR**

KENWOOD
... pacesetter in amateur radio



1.8-28MHz SSB TRANSCEIVER

TS-520S SERIES TS-520S/VFO-520S/SP-520



(Antenna Coupler)

Frequency range..... 6 amateur bands from 1.8 to 29.7 MHz
Input Impedance..... 50 Ohms
Output Impedance..... 50 to 500 Ohms, unbalanced
Through power..... 200 Watts max.

(Wattmeter)

Type..... Through-line wattmeter
Frequency range..... 1.8 to 29.7 MHz
Measurable RF power..... Up to 20/200 Watts, switched
Kinds of RF power..... Forward and reflected power,
switched
Impedance..... 50 Ohms
Accuracy..... Better than $\pm 10\%$ of full scale



The SP-520 has built-in selectable tone filters to attenuate high and/or low frequencies. You can switch between two different receiver sources. Headphones may also be used in conjunction with the filter network.

"TRIO-KENWOOD (AUSTRALIA) PTY. LTD."

31 Whiting Street, Artarmon, Sydney N.S.W. Australia 2064. Telephone (02) 438 1277

INTERSTATE DISTRIBUTORS:

Vic:	VICOM IMPORTS P/L	(03) 699 6700
Qld:	MITCHELL RADIO CO.	(07) 57 6830
SA:	INTERNATIONAL COMMUNICATIONS SYSTEMS P/L	(08) 47 3688
WA:	WILLIS TRADING COMPANY	(09) 321 7600
Tas:	ADVANCE ELECTRONICS	(003) 31 5688
NT:	R. J. KLOSE	(089) 89 3279



Assembling of communications equipment

"ps"

Did you know Kenwood are to release a new solid state 30W PEP HF Mobile Transceiver with full 10m coverage, digital display and noise blanker in OCTOBER? WATCH for further details.



DRAKE TR-7

**solid state continuous coverage
synthesized hf system**

Introducing a remarkable engineering breakthrough...



Designed and
manufactured
in U.S.A.

Models shown
are Drake
TR-7/DR-7
with RV-7
and MS-7

0-30 MHz
continuous coverage reception capability

160-10 Meters

Amateur Band transmission, including capability for
MARS, Embassy, Government, and future band expansions*

**The Drake TR-7 System significantly
advances the technology of worldwide
radio communications and unfolds
an entirely new state of the art.**

Call, phone or write for a detailed brochure to 14V

ELMEASCO

Instruments Pty. Ltd.

P.O. Box 30, Concord, N.S.W. 2137.
Telephone: 736-2888.
Melbourne: P.O. Box 107, Mt. Waverley, Vic. 3149.
Telephone: 233-4044.
Adelaide: 51-3521; Brisbane: 392-2884.
Perth: 325-3144.